



SAW filters for mobile communications

Series/Type: B4219

The following products presented in this data sheet are being withdrawn.

Ordering Code	Substitute Product	Date of Withdrawal	Deadline Last Orders	Last Shipments
B39202B4219U810		2009-07-31	2009-11-30	2010-02-28

For further information please contact your nearest EPCOS sales office, which will also support you in selecting a suitable substitute. The addresses of our worldwide sales network are presented at www.epcos.com/sales.



SAW Components

B4219

Low-Loss Dual Band Filter for Mobile Communication

881,5 & 1960,0 MHz


Preliminary Data Sheet



Ceramic package **QCC8D**

Features

- Low-loss 2-in-1 RF filter for mobile telephone AMPS and PCS CDMA systems, receive path
- Device with two integrated Rx-filters
- Usable passband of PCS Rx filter: 60 MHz
- Usable passband of AMPS Rx-filter: 25 MHz
- No matching network required for operation at 50 Ω
- Package for **S**urface **M**ounted **T**echnology (**SMT**)

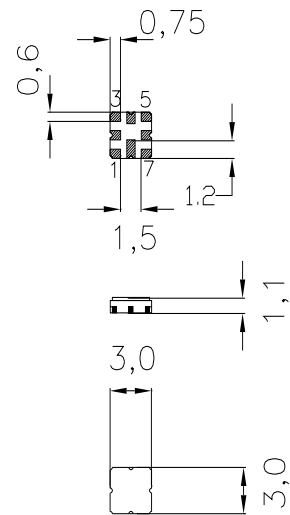


Dimensions in mm, approx. weight 0,037 g

Terminals

- Ni, gold-plated

Pin configuration

- | | |
|---------|-----------------------------|
| 1 | Input PCS filter |
| 7 | Output PCS filter |
| 3 | Input AMPS filter |
| 5 | Output AMPS filter |
| 2,4,6,8 | Case-ground, to be grounded |

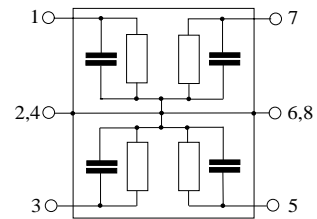

Type	Ordering code	Marking and Package according to	Packing according to
B4219	B39202-B4219-U810	C61157-A7-A72	F61074-V8101-Z0000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 30 /+ 85	$^{\circ}\text{C}$	source and load impedance 50 Ω continuous wave
Storage temperature range	T_{stg}	- 40 /+ 85	$^{\circ}\text{C}$	
DC voltage	V_{DC}	3	V	
Input power max. 824...849 MHz	P_{IN}	13	dBm	
1850...1910 MHz		13	dBm	



SAW Components

B4219

Low-Loss Dual Band Filter for Mobile Communication

881,5 & 1960,0 MHz

Preliminary Data Sheet



Characteristics of PCS Rx filter

Operating temperature range: $T = -30$ to $+85$ °C
 Terminating source impedance: $Z_S = 50 \Omega$
 Terminating load impedance: $Z_L = 50 \Omega$

		min.	typ.	max.	
Center frequency	f_c	—	1960,0	—	MHz
Maximum insertion attenuation	α_{\max}	—	3,7	4,3	dB
1930,0... 1990,0MHz					
Amplitude ripple (p-p)	$\Delta\alpha$	—	1,9	2,5	dB
1930,0... 1990,0MHz					
Input return loss		10,0	11,5	—	dB
1930,0... 1990,0 MHz					
Output return loss		10,0	11,5	—	dB
1930,0... 1990,0 MHz					
Attenuation	α	20,0	22,0	—	dB
30,0... 1850,0 MHz		20,0	31,0	—	dB
2110,0... 2400,0 MHz					
Tx band suppression		13,0	20,0	—	dB
1850,0... 1910,0 MHz					



SAW Components

B4219

Low-Loss Dual Band Filter for Mobile Communication

881,5 & 1960,0 MHz

Preliminary Data Sheet



Characteristics of PCS Rx filter

Operating temperature range: $T = -30$ to $+70$ °C
Terminating source impedance: $Z_S = 50 \Omega$
Terminating load impedance: $Z_L = 50 \Omega$

		min.	typ.	max.	
Center frequency	f_c	—	1960,0	—	MHz
Maximum insertion attenuation	α_{\max}				
1930,0... 1990,0MHz		—	3,7	4,2	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
1930,0... 1990,0MHz		—	1,9	2,4	dB
Input return loss					
1930,0... 1990,0 MHz		10,0	12,0	—	dB
Output return loss					
1930,0... 1990,0 MHz		10,0	12,0	—	dB
Attenuation	α				
30,0... 1850,0 MHz		20,0	22,0	—	dB
2110,0... 2400,0 MHz		20,0	31,0	—	dB
Tx band suppression					
1850,0... 1910,0 MHz		15,0	20,0	—	dB



SAW Components

B4219

Low-Loss Dual Band Filter for Mobile Communication

881,5 & 1960,0 MHz

Preliminary Data Sheet



Characteristics of PCS Rx filter

Operating temperature range: $T = 25 \pm 2^\circ \text{C}$

Terminating source impedance: $Z_S = 50 \Omega$

Terminating load impedance: $Z_L = 50 \Omega$

		min.	typ.	max.	
Center frequency	f_c	—	1960,0	—	MHz
Maximum insertion attenuation	α_{\max}	—	3,4	3,7	dB
1930,0... 1990,0MHz					
Amplitude ripple (p-p)	$\Delta\alpha$	—	1,6	1,9	dB
1930,0... 1990,0MHz					
Input return loss		10,0	12,5	—	dB
1930,0... 1990,0 MHz					
Output return loss		10,0	12,5	—	dB
1930,0... 1990,0 MHz					
Attenuation	α	20,0	22,0	—	dB
30,0... 1850,0 MHz		20,0	31,0	—	dB
2110,0... 2400,0 MHz					
Tx band suppression		20,0	22,0	—	dB
1850,0... 1910,0 MHz					



SAW Components

B4219


Low-Loss Dual Band Filter for Mobile Communication

881,5 & 1960,0 MHz


Preliminary Data Sheet



Transfer function of the PCS filter (narrow band measurement)

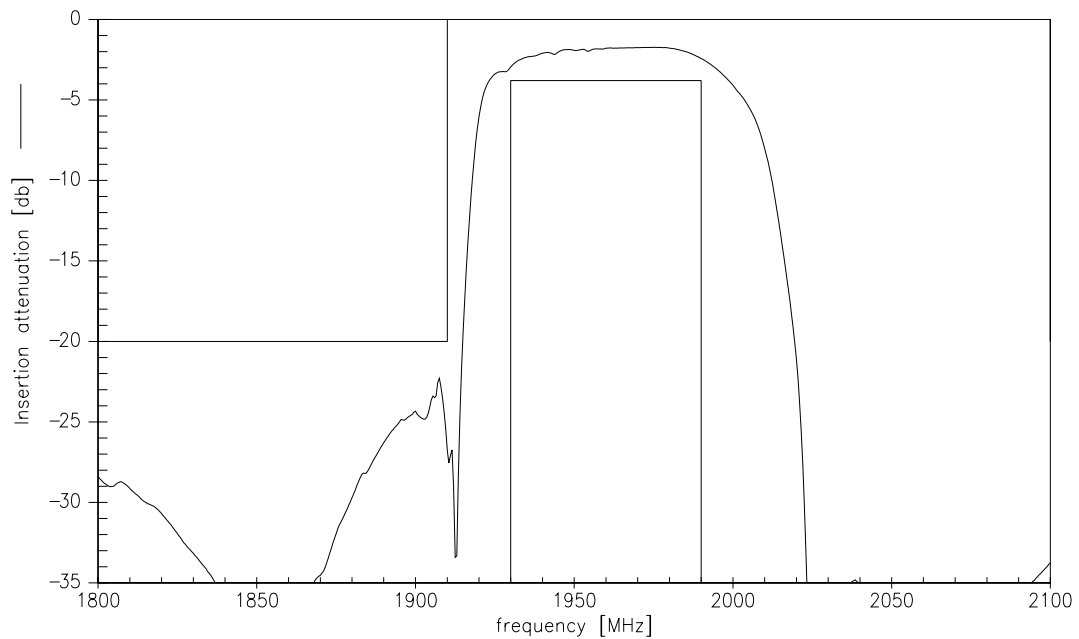

Transfer function of the PCS filter (wide band measurement)

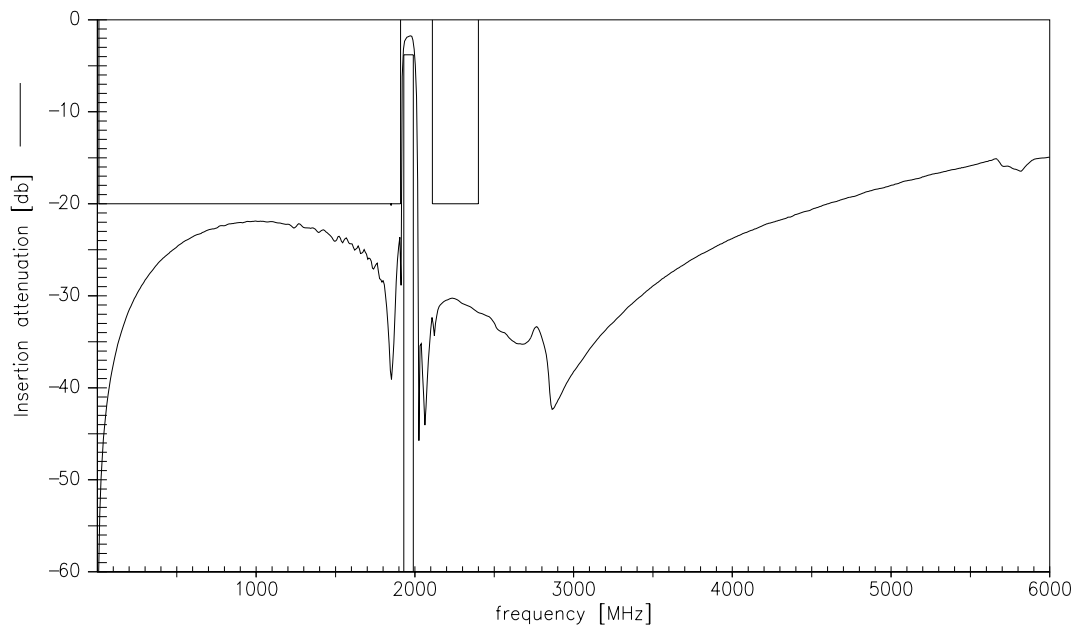



SAW Components

B4219



Low-Loss Dual Band Filter for Mobile Communication

881,5 & 1960,0 MHz

Preliminary Data Sheet



Reflection coefficients of the PCS filter (measurement)

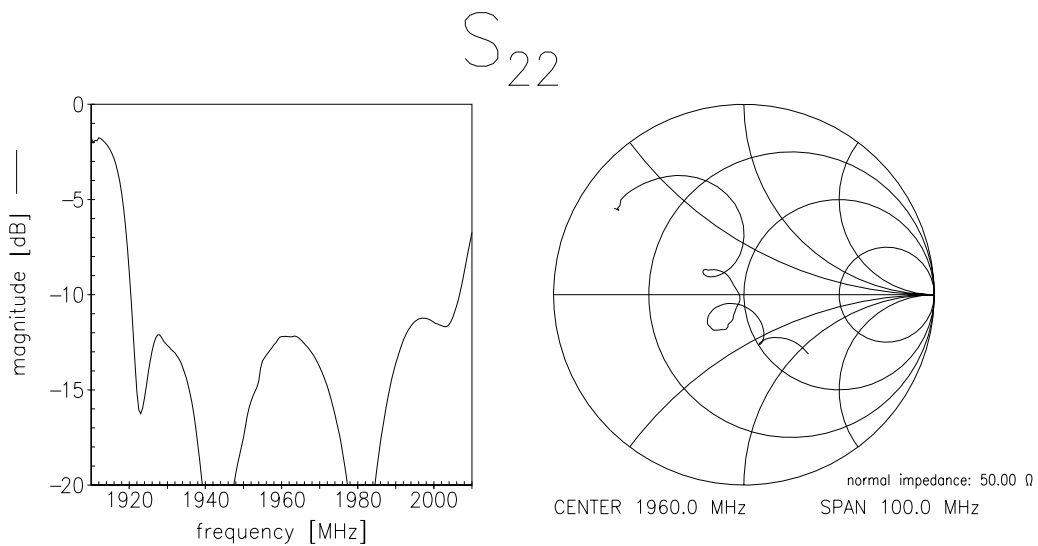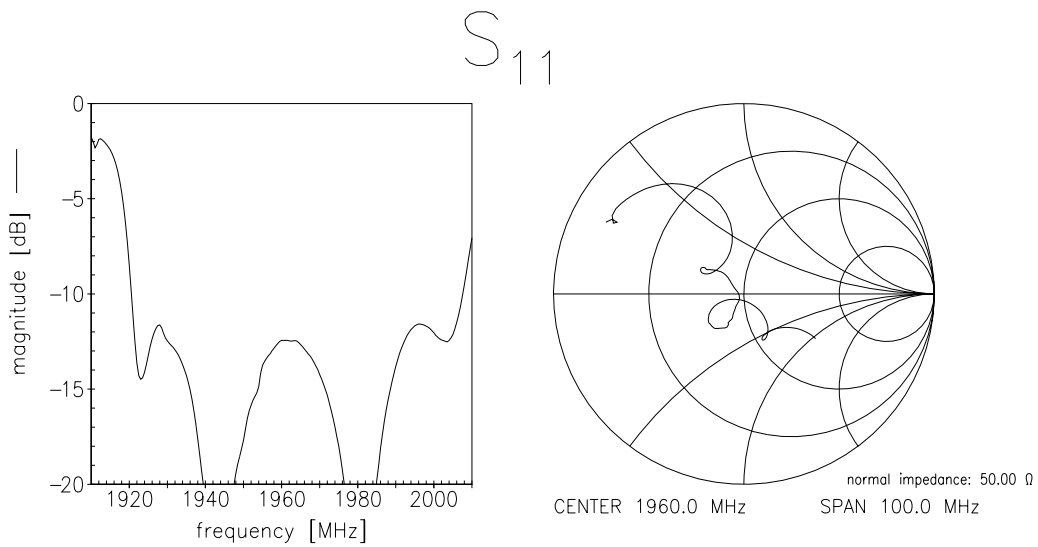



SAW Components

B4219

Low-Loss Dual Band Filter for Mobile Communication

881,5 & 1960,0 MHz

Preliminary Data Sheet



Characteristics of AMPS Rx filter

Operating temperature range: $T = -30$ to $+70$ °C *

Terminating source impedance: $Z_S = 50 \Omega$

Terminating load impedance: $Z_L = 50 \Omega$

		min.	typ.	max.	
Center frequency	f_c	—	881,5	—	MHz
Maximum insertion attenuation	α_{\max}				
869,0...894,0MHz		—	2,5	3,0	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
869,0...894,0MHz		—	0,9	1,4	dB
Input return loss					
869,0...894,0 MHz		10,0	12,0	—	dB
Output return loss					
869,0...894,0 MHz		10,0	13,0	—	dB
Attenuation	α				
30,0...824,0MHz		35,0	42,0	—	dB
1050,0...1080,0MHz		38,0	42,0	—	dB
1080,0...2300,0MHz		30,0	31,5	—	dB
2300,0...2600,0MHz		25,0	30,0	—	dB
Tx band suppression					
824,0...849,0MHz		35,0	40,0	—	dB

* all values also fulfill the temperature range -30 to $+85$ °C



SAW Components

B4219

Low-Loss Dual Band Filter for Mobile Communication

881,5 & 1960,0 MHz

Preliminary Data Sheet



Characteristics of AMPS Rx filter

Operating temperature range: $T = 25 \pm 2 \text{ }^{\circ}\text{C}$

Terminating source impedance: $Z_S = 50 \text{ } \Omega$

Terminating load impedance: $Z_L = 50 \text{ } \Omega$

		min.	typ.	max.	
Center frequency	f_c	—	881,5	—	MHz
Maximum insertion attenuation	α_{\max}	—	2,4	2,6	dB
869,0...894,0MHz					
Amplitude ripple (p-p)	$\Delta\alpha$	—	0,6	1,1	dB
869,0...894,0MHz					
Input return loss		10,0	12,5	—	dB
869,0...894,0 MHz					
Output return loss		10,0	13,5	—	dB
869,0...894,0 MHz					
Attenuation	α				
30,0...824,0MHz		35,0	42,0	—	dB
1050,0...1080,0MHz		38,0	42,0	—	dB
1080,0...2300,0MHz		30,0	31,5	—	dB
2300,0...2600,0MHz		25,0	30,0	—	dB
Tx band suppression		35,0	40,0	—	dB
824,0...849,0MHz					



SAW Components

B4219


Low-Loss Dual Band Filter for Mobile Communication

881,5 & 1960,0 MHz


Preliminary Data Sheet



Transfer function of the AMPS filter (narrow band measurement)

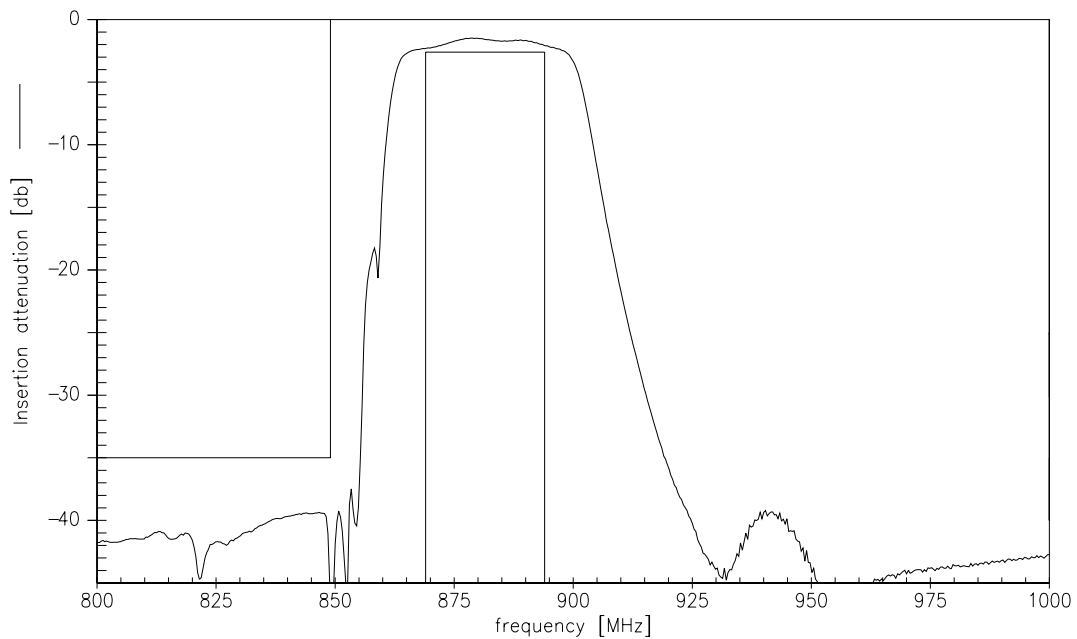

Transfer function of the AMPS filter (wide band measurement)

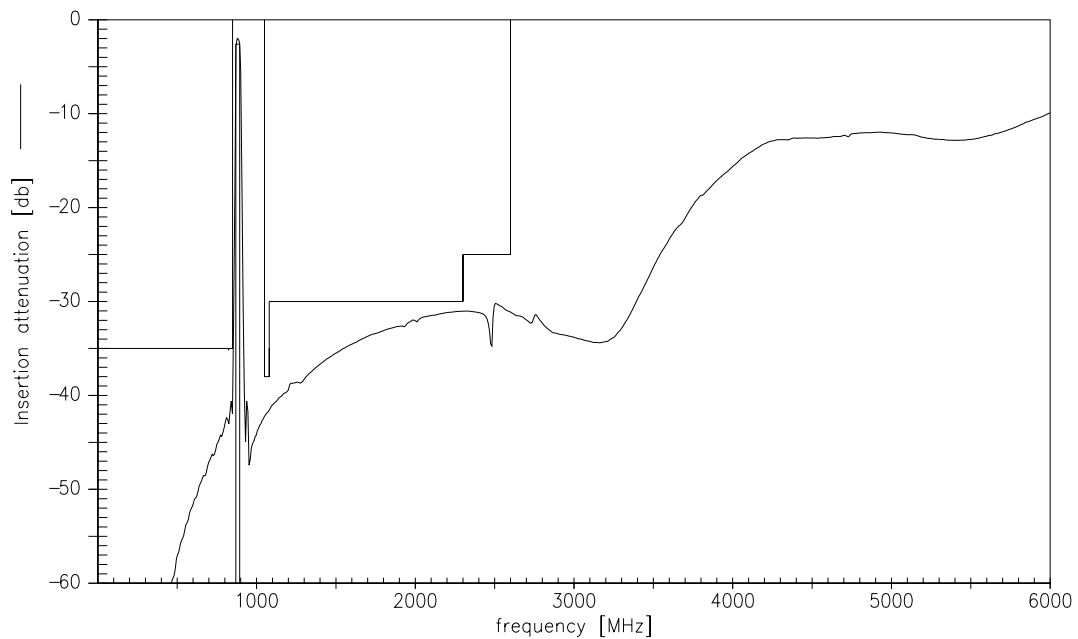



SAW Components

B4219



Low-Loss Dual Band Filter for Mobile Communication

881,5 & 1960,0 MHz

Preliminary Data Sheet



Reflection coefficients of the AMPS filter (measurement)

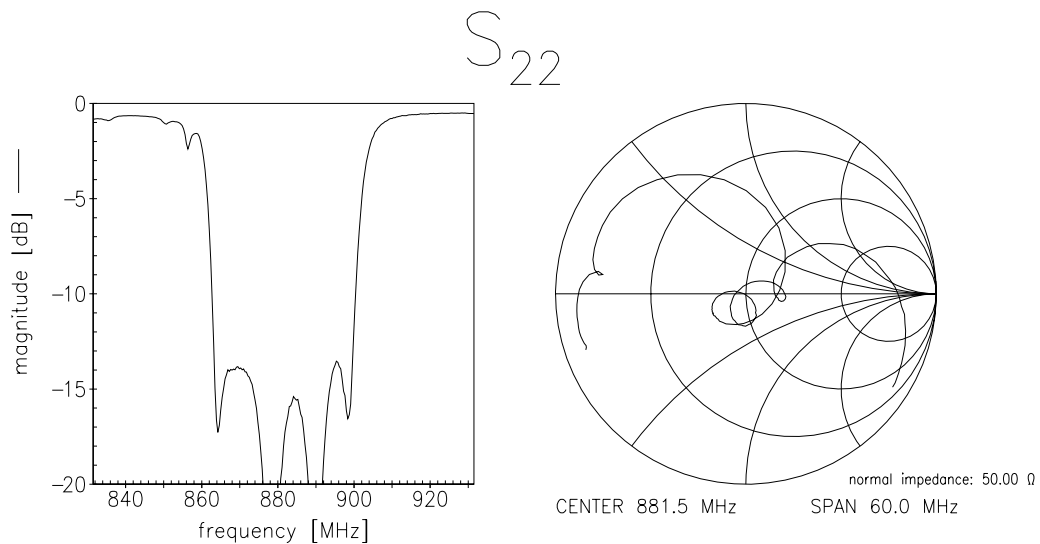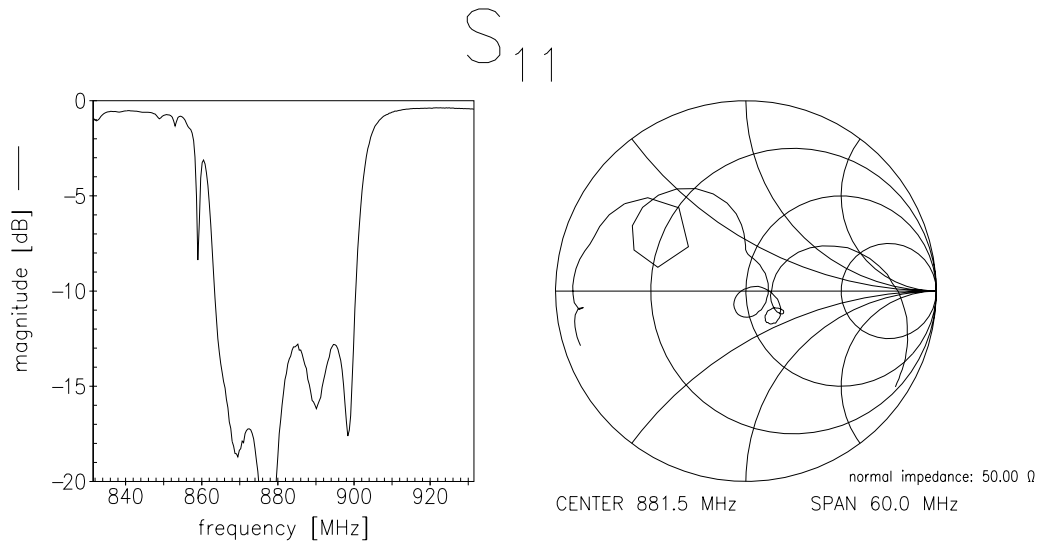



SAW Components

B4219

Low-Loss Dual Band Filter for Mobile Communication

881,5 & 1960,0 MHz

Preliminary Data Sheet



Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW MC WT

P.O. Box 80 17 09, D-81617 München

© EPCOS AG 2000. All Rights Reserved. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

The information contained in this brochure describes the type of component and shall not be considered as guaranteed characteristics. Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[EPCOS:](#)

[B39202B4219U810](#)