

The S-19504/19505 Series, developed by using high-withstand voltage CMOS technology, is a low dropout positive voltage regulator with the watchdog timer and the reset function, which has high-withstand voltage. The monitoring time of watchdog timer can be adjusted by an external capacitor. Moreover, a voltage detection circuit which monitors the output voltage is also prepared.

ABLIC Inc. offers a "thermal simulation service" which supports the thermal design in conditions when our power management ICs are in use by customers. Our thermal simulation service will contribute to reducing the risk in the thermal design at customers' development stage.

ABLIC Inc. also offers FIT rate calculated based on actual customer usage conditions in order to support customer functional safety design.

Contact our sales representatives for details.

Caution This product can be used in vehicle equipment and in-vehicle equipment. Before using the product for these purposes, it is imperative to contact our sales representatives.

■ Features

Regulator block

- Output voltage: 3.3 V, 5.0 V
- Input voltage: 3.0 V to 36.0 V
- Output voltage accuracy: $\pm 2.0\%$ ($T_j = -40^\circ\text{C}$ to $+150^\circ\text{C}$)
- Dropout voltage: 100 mV typ. (5.0 V output product, $I_{\text{OUT}} = 100\text{ mA}$)
- Output current: Possible to output 250 mA ($V_{\text{IN}} = V_{\text{OUT(S)}} + 1.0\text{ V}$)*¹
- Input and output capacitors: A ceramic capacitor of 1.0 μF or more can be used.
- Built-in overcurrent protection circuit: Limits overcurrent of output transistor.
- Built-in thermal shutdown circuit: Detection temperature 170°C typ.

Detector block

- Detection voltage: 2.6 V to 4.7 V, selectable in 0.1 V step
- Detection voltage accuracy: $\pm 2.0\%$ ($T_j = -40^\circ\text{C}$ to $+150^\circ\text{C}$)
- Hysteresis width: 0.12 V min.
- Release delay time is adjustable*²: 20 ms typ. ($C_{\text{DLY}} = 10\text{ nF}$)

Watchdog timer block

- Watchdog activation current is adjustable: 1.5 mA typ. (WADJ pin is open)
- Watchdog trigger time is adjustable*²: 46 ms typ. ($C_{\text{DLY}} = 10\text{ nF}$)
- Product type is selectable: S-19504 Series (Product with WEN pin (Output: WO / RO pin))
S-19505 Series (Product without WEN pin (Output: WO pin and RO pin))
- Autonomous watchdog operation function: Watchdog timer operates due to detection of load current.
- Watchdog mode: Time-out mode

Overall

- Current consumption: 3.0 μA typ. (During watchdog timer deactivation)
5.0 μA typ. (During watchdog timer activation)
- Operation temperature range: $T_a = -40^\circ\text{C}$ to $+125^\circ\text{C}$
- Lead-free (Sn 100%), halogen-free
- Withstand 45 V load dump
- AEC-Q100 qualified*³

*¹. Please make sure that the loss of the IC will not exceed the power dissipation when the output current is large.

*². The release delay time and the watchdog trigger time can be adjusted by connecting C_{DLY} to the DLY pin.

*³. Contact our sales representatives for details.

■ Applications

- Constant-voltage power supply for automotive electric component, monitoring of microcontroller

■ Packages

- TO-252-9S
- HSOP-8A

■ Block Diagrams

1. S-19504 Series (Product with WEN pin)

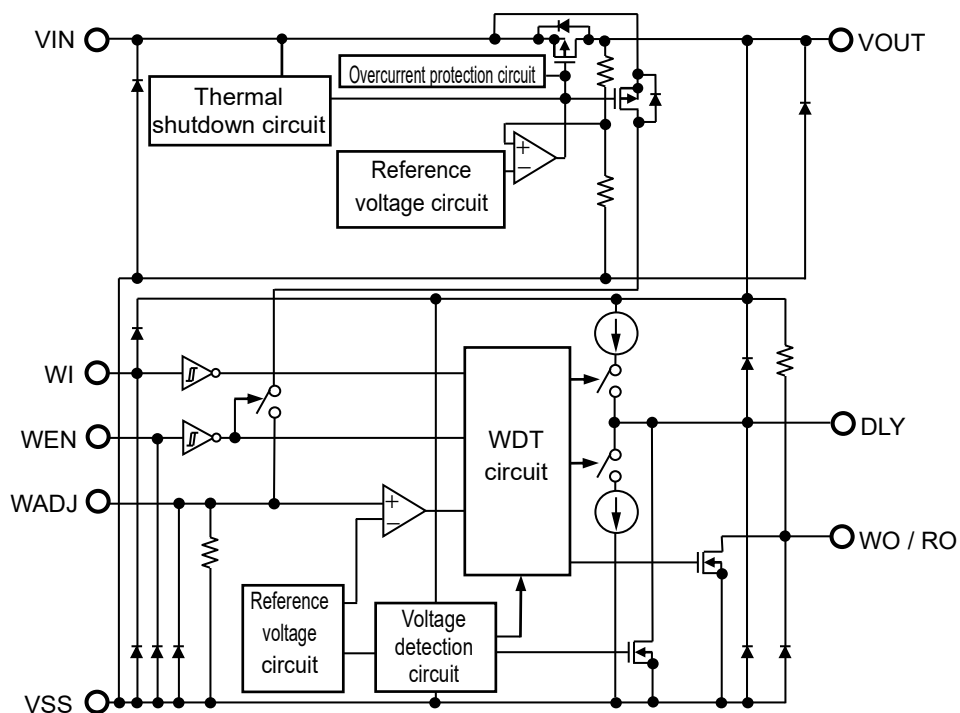


Figure 1

2. S-19505 Series (Product without WEN pin)

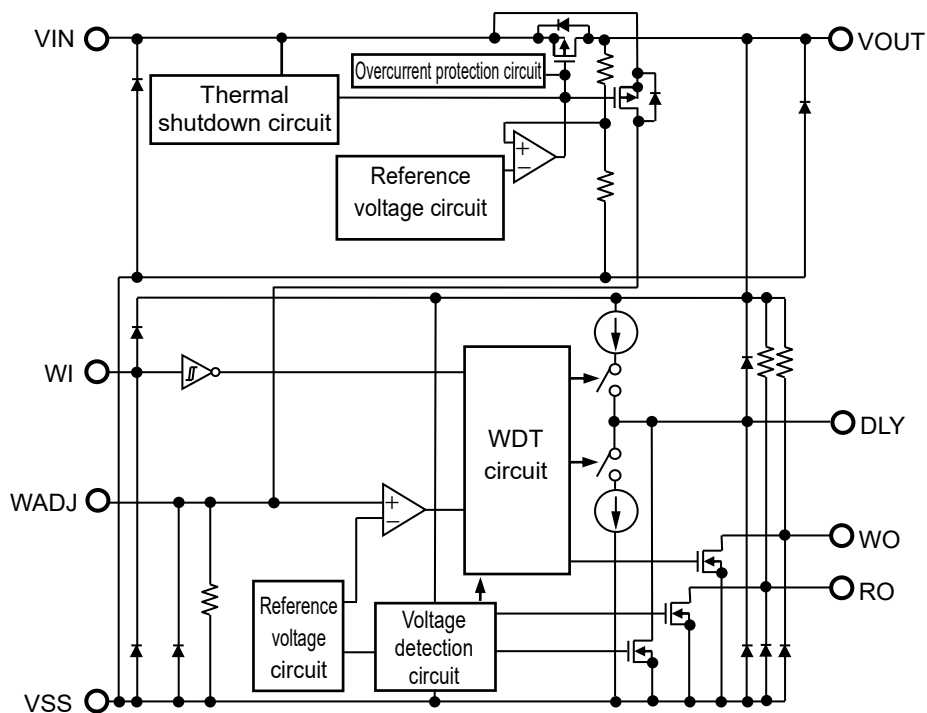


Figure 2


■ AEC-Q100 Qualified

This IC supports AEC-Q100 for the operation temperature grade 1.

Contact our sales representatives for details of AEC-Q100 reliability specification.

■ Product Name Structure

1. Product name

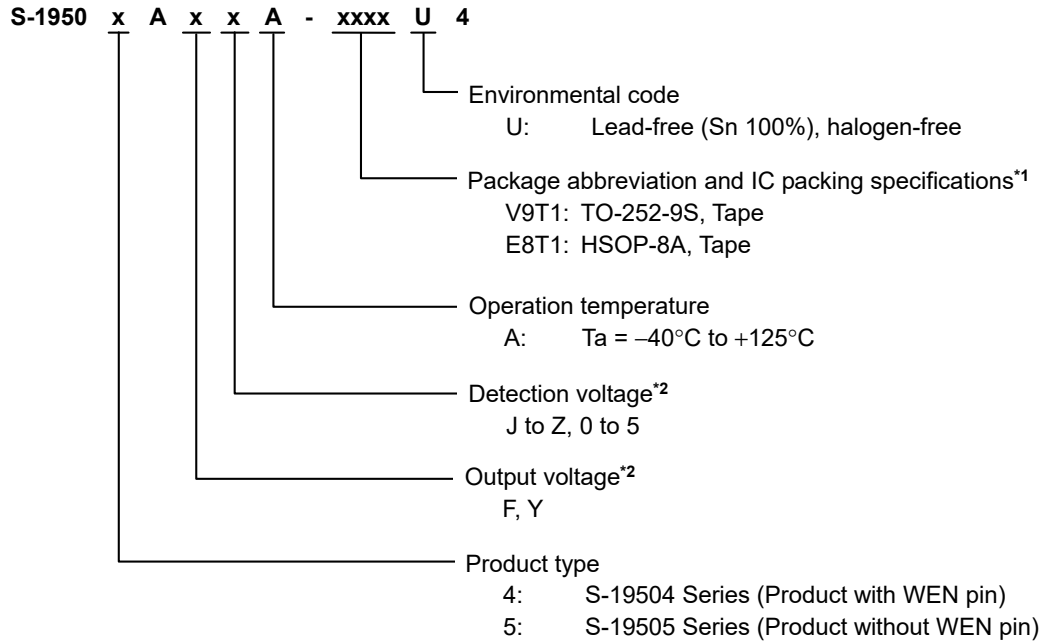

*1. Refer to the tape drawing.

*2. Refer to "2. Product option list".

2. Product option list

Table 1 Output Voltage

| Set Output Voltage | Symbol |
|--------------------|--------|
| 5.0 V | F |
| 3.3 V | Y |

Table 2 Detection Voltage

| Set Detection Voltage | Symbol |
|-----------------------|--------|
| 4.7 V | J |
| 4.6 V | K |
| 4.5 V | L |
| 4.4 V | M |
| 4.3 V | N |
| 4.2 V | P |
| 4.1 V | Q |
| 4.0 V | R |
| 3.9 V | S |
| 3.8 V | T |
| 3.7 V | U |

| Set Detection Voltage | Symbol |
|-----------------------|--------|
| 3.6 V | V |
| 3.5 V | W |
| 3.4 V | X |
| 3.3 V | Y |
| 3.2 V | Z |
| 3.1 V | 0 |
| 3.0 V | 1 |
| 2.9 V | 2 |
| 2.8 V | 3 |
| 2.7 V | 4 |
| 2.6 V | 5 |

Remark Set output voltage ≥ Set detection voltage + 0.3 V

3. Packages

Table 3 Package Drawing Codes

| Package Name | Dimension | Tape | Reel | Land |
|--------------|--------------|--------------|--------------|--------------|
| TO-252-9S | VA009-A-P-SD | VA009-A-C-SD | VA009-A-R-SD | VA009-A-L-SD |
| HSOP-8A | FH008-A-P-SD | FH008-A-C-SD | FH008-A-R-SD | FH008-A-L-SD |

4. Product name list

4.1 S-19504 Series (Product with WEN pin)

Table 4

| Output Voltage (V _{OUT}) | Detection Voltage (–V _{DET}) | TO-252-9S | HSOP-8A |
|------------------------------------|--|--------------------|--------------------|
| 3.3 V ± 2.0% | 2.8 V ± 2.0% | S-19504AY3A-V9T1U4 | S-19504AY3A-E8T1U4 |
| 3.3 V ± 2.0% | 2.9 V ± 2.0% | S-19504AY2A-V9T1U4 | S-19504AY2A-E8T1U4 |
| 3.3 V ± 2.0% | 3.0 V ± 2.0% | S-19504AY1A-V9T1U4 | S-19504AY1A-E8T1U4 |
| 5.0 V ± 2.0% | 4.2 V ± 2.0% | S-19504AFPA-V9T1U4 | S-19504AFPA-E8T1U4 |
| 5.0 V ± 2.0% | 4.6 V ± 2.0% | S-19504AFKA-V9T1U4 | S-19504AFKA-E8T1U4 |

Remark Please contact our sales representatives for products other than the above.

4.2 S-19505 Series (Product without WEN pin)

Table 5

| Output Voltage (V _{OUT}) | Detection Voltage (–V _{DET}) | TO-252-9S | HSOP-8A |
|------------------------------------|--|--------------------|--------------------|
| 3.3 V ± 2.0% | 2.8 V ± 2.0% | S-19505AY3A-V9T1U4 | S-19505AY3A-E8T1U4 |
| 3.3 V ± 2.0% | 2.9 V ± 2.0% | S-19505AY2A-V9T1U4 | S-19505AY2A-E8T1U4 |
| 3.3 V ± 2.0% | 3.0 V ± 2.0% | S-19505AY1A-V9T1U4 | S-19505AY1A-E8T1U4 |
| 5.0 V ± 2.0% | 4.2 V ± 2.0% | S-19505AFPA-V9T1U4 | S-19505AFPA-E8T1U4 |
| 5.0 V ± 2.0% | 4.6 V ± 2.0% | S-19505AFKA-V9T1U4 | S-19505AFKA-E8T1U4 |

Remark Please contact our sales representatives for products other than the above.

■ Pin Configurations

1. TO-252-9S

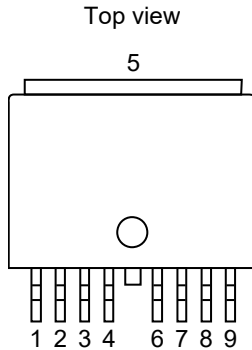


Figure 3

Table 6 S-19504 Series (Product with WEN pin)

| Pin No. | Symbol | Description | |
|---------|-----------|--|---------------------|
| 1 | VOUT | Voltage output pin (Regulator block) | |
| 2 | WADJ | Connection pin for watchdog activation threshold current adjustment resistor | |
| 3 | DLY | Connection pin for release delay time and monitoring time adjustment capacitor | |
| 4 | NC*1 | No connection | |
| 5 | VSS | GND pin | |
| 6 | WO / RO*2 | WO | Watchdog output pin |
| | | RO | Reset output pin |
| 7 | WEN | Watchdog enable pin | |
| 8 | WI | Watchdog input pin | |
| 9 | VIN | Voltage input pin (Regulator block) | |

Table 7 S-19505 Series (Product without WEN Pin)

| Pin No. | Symbol | Description | |
|---------|--------|--|--|
| 1 | VOUT | Voltage output pin (Regulator block) | |
| 2 | WADJ | Connection pin for watchdog activation threshold current adjustment resistor | |
| 3 | DLY | Connection pin for release delay time and monitoring time adjustment capacitor | |
| 4 | NC*1 | No connection | |
| 5 | VSS | GND pin | |
| 6 | RO | Reset output pin | |
| 7 | WO | Watchdog output pin | |
| 8 | WI | Watchdog input pin | |
| 9 | VIN | Voltage input pin (Regulator block) | |

*1. The NC pin is electrically open.

The NC pin can be connected to the VIN pin or the VSS pin.

*2. The WO / RO pin combines the watchdog output pin and the reset output pin.

2. HSOP-8A

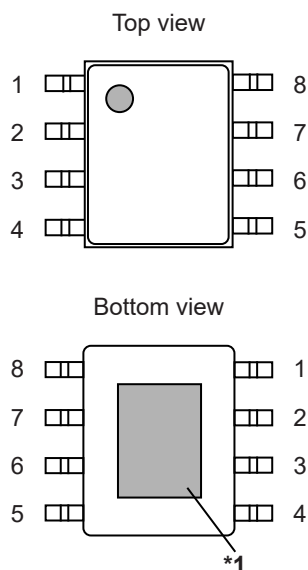


Figure 4

Table 8 S-19504 Series (Product with WEN pin)

| Pin No. | Symbol | Description |
|---------|-----------|--|
| 1 | VOUT | Voltage output pin (Regulator block) |
| 2 | WADJ | Connection pin for watchdog activation threshold current adjustment resistor |
| 3 | VSS | GND pin |
| 4 | DLY | Connection pin for release delay time and monitoring time adjustment capacitor |
| 5 | WO / RO*2 | WO Watchdog output pin |
| | | RO Reset output pin |
| 6 | WEN | Watchdog enable pin |
| 7 | WI | Watchdog input pin |
| 8 | VIN | Voltage input pin (Regulator block) |

Table 9 S-19505 Series (Product without WEN pin)

| Pin No. | Symbol | Description |
|---------|--------|--|
| 1 | VOUT | Voltage output pin (Regulator block) |
| 2 | WADJ | Connection pin for watchdog activation threshold current adjustment resistor |
| 3 | VSS | GND pin |
| 4 | DLY | Connection pin for release delay time and monitoring time adjustment capacitor |
| 5 | RO | Reset output pin |
| 6 | WO | Watchdog output pin |
| 7 | WI | Watchdog input pin |
| 8 | VIN | Voltage input pin (Regulator block) |

- *1. Connect the heat sink of backside at shadowed area to the board, and set electric potential GND. However, do not use it as the function of electrode.
- *2. The WO / RO pin combines the watchdog output pin and the reset output pin.

■ Absolute Maximum Ratings

Table 10

(T_j = -40°C to +150°C unless otherwise specified)

| Item | Symbol | Absolute Maximum Rating | Unit |
|-------------------------------|----------------------|---|------|
| VIN pin voltage | V _{IN} | V _{SS} - 0.3 to V _{SS} + 45.0 | V |
| VOOUT pin voltage | V _{OUT} | V _{SS} - 0.3 to V _{IN} + 0.3 ≤ V _{SS} + 7.0 | V |
| DLY pin voltage | V _{DLY} | V _{SS} - 0.3 to V _{OUT} + 0.3 ≤ V _{SS} + 7.0 | V |
| RO pin voltage | V _{RO} | V _{SS} - 0.3 to V _{OUT} + 0.3 ≤ V _{SS} + 7.0 | V |
| WADJ pin voltage | V _{WADJ} | V _{SS} - 0.3 to V _{IN} + 0.3 ≤ V _{SS} + 7.0 | V |
| WEN pin voltage | V _{WEN} | V _{SS} - 0.3 to V _{SS} + 7.0 | V |
| WI pin voltage | V _{WI} | V _{SS} - 0.3 to V _{OUT} + 0.3 ≤ V _{SS} + 7.0 | V |
| WO pin voltage | V _{WO} | V _{SS} - 0.3 to V _{OUT} + 0.3 ≤ V _{SS} + 7.0 | V |
| WO / RO pin voltage | V _{WO / RO} | V _{SS} - 0.3 to V _{OUT} + 0.3 ≤ V _{SS} + 7.0 | V |
| Output current | I _{OUT} | 325 | mA |
| | I _{RO} | 30 | mA |
| | I _{WO} | 30 | mA |
| | I _{WO / RO} | 30 | mA |
| Junction temperature | T _j | -40 to +150 | °C |
| Operation ambient temperature | T _{opr} | -40 to +125 | °C |
| Storage temperature | T _{stg} | -40 to +150 | °C |

Caution The absolute maximum ratings are rated values exceeding which the product could suffer physical damage. These values must therefore not be exceeded under any conditions.

■ Thermal Resistance Value

Table 11

| Item | Symbol | Condition | | Min. | Typ. | Max. | Unit |
|---|--------|-----------|---------|------|------|------|------|
| Junction-to-ambient thermal resistance ^{1, *2} | θJA | TO-252-9S | Board A | — | 84 | — | °C/W |
| | | | Board B | — | — | — | °C/W |
| | | | Board C | — | — | — | °C/W |
| | | | Board D | — | — | — | °C/W |
| | | | Board E | — | 24 | — | °C/W |
| | | HSOP-8A | Board A | — | 105 | — | °C/W |
| | | | Board B | — | — | — | °C/W |
| | | | Board C | — | — | — | °C/W |
| | | | Board D | — | — | — | °C/W |
| | | | Board E | — | 31 | — | °C/W |

*1. Test environment: compliance with JEDEC STANDARD JESD51-2A

*2. Measurement values when this IC is mounted on each board

Remark Refer to "■ Power Dissipation" and "Test Board" for details.

■ Recommended Operation Conditions

Table 12

| Item | Symbol | Condition | Min. | Typ. | Max. | Unit |
|---|-----------------------|---|---------------------------|------|------------------|------|
| VIN pin voltage | V _{IN} | — | 3.0 | — | 36.0 | V |
| | | When using autonomous watchdog operation function*1 | V _{OUT(S)} + 1.0 | — | 36.0 | V |
| WEN pin voltage | V _{WEN} | S-19504 Series | 0 | — | V _{OUT} | V |
| WI pin voltage | V _{WI} | — | 0 | — | V _{OUT} | V |
| Watchdog input "H" time*2 | t _{high} | — | 5 | — | — | μs |
| Watchdog input "L" time*2 | t _{low} | — | 5 | — | — | μs |
| Watchdog input frequency*2 | f _{WI} | Duty ratio 50% | — | — | 0.2 | MHz |
| Input capacitance | C _{IN} | — | 1.0 | — | — | μF |
| Output capacitance | C _L | — | 1.0 | — | — | μF |
| Equivalent series resistance | R _{ESR} | Output capacitor (C _L) | — | — | 100 | Ω |
| Release delay time and monitoring time adjustment capacitance*3 | C _{DLY} | — | 1 | 10 | — | nF |
| Watchdog activation threshold current adjustment resistance*4 | R _{WADJ,ext} | Connected to WADJ pin | 10 | — | — | kΩ |
| External pull-up resistances for output pins | R _{extW} | S-19505 Series | Connected to WO pin | 3 | — | kΩ |
| | R _{extR} | S-19504 Series | Connected to WO / RO pin | 3 | — | kΩ |
| | | S-19505 Series | Connected to RO pin | 3 | — | kΩ |

*1. Refer to "3. Watchdog timer block" in "■ Operation" for the autonomous watchdog operation function.

*2. When inputting a rising edge that satisfies the condition of Figure 5 to the WI pin, the watchdog timer detects a trigger.

The signal input from the monitored object by the watchdog timer should satisfy the condition of Figure 5.

*3. Refer to "2. Release delay time and monitoring time adjustment capacitor (C_{DLY})" in "■ Selection of External Parts" for the details.

*4. Refer to "3. Watchdog activation threshold current adjustment resistor (R_{WADJ,ext})" in "■ Selection of External Parts" for the details.

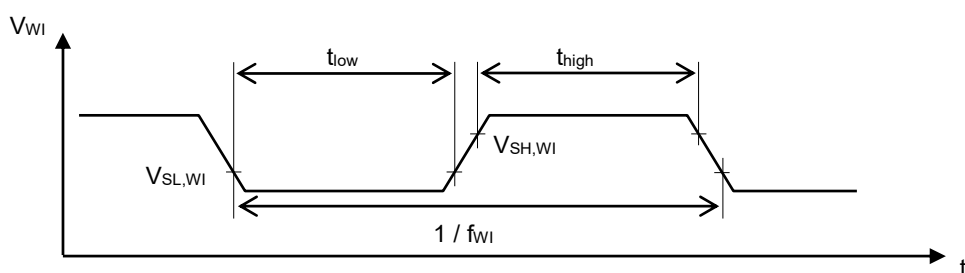


Figure 5

Caution Generally a series regulator may cause oscillation, depending on the selection of external parts. Confirm that no oscillation occurs in the actual application using capacitors that meet the above C_{IN}, C_L, and R_{ESR}.

■ Electrical Characteristics

1. Regulator block

Table 13

($V_{IN} = 13.5 \text{ V}$, $T_j = -40^\circ\text{C}$ to $+150^\circ\text{C}$ unless otherwise specified)

| Item | Symbol | Condition | | Min. | Typ. | Max. | Unit | Test Circuit |
|--|---|---|-----------------------------|----------------------------|---------------------|----------------------------|------|--------------|
| Output voltage* ¹ | V _{OUT(E)} | V _{OUT(S)} + 1.0 V ≤ V _{IN} ≤ 18.0 V, 1 mA ≤ I _{OUT} ≤ 100 mA | | V _{OUT(S)} – 2.0% | V _{OUT(S)} | V _{OUT(S)} + 2.0% | V | 1 |
| Output current* ² | I _{OUT} | V _{IN} ≥ V _{OUT(S)} + 1.0 V | | 250* ⁷ | – | – | mA | 2 |
| Dropout voltage* ³ | V _{drop} | I _{OUT} = 100 mA | V _{OUT(S)} = 3.3 V | – | 120 | 240 | mV | 1 |
| | | | V _{OUT(S)} = 5.0 V | – | 100 | 200 | mV | 1 |
| | | I _{OUT} = 250 mA | V _{OUT(S)} = 3.3 V | – | 300 | 600 | mV | 1 |
| | | | V _{OUT(S)} = 5.0 V | – | 250 | 500 | mV | 1 |
| Line regulation* ⁴ | $\frac{\Delta V_{OUT1}}{\Delta V_{IN} \bullet V_{OUT}}$ | V _{OUT(S)} + 1.0 V ≤ V _{IN} ≤ 36.0 V, I _{OUT} = 1 mA | | – | 0.01 | 0.02 | %/V | 1 |
| Load regulation* ⁵ | ΔV _{OUT2} | V _{IN} = V _{OUT(S)} + 1.0 V, 1 mA ≤ I _{OUT} ≤ 250 mA, Ta = +25°C | | – | 10 | 50 | mV | 1 |
| Input voltage | V _{IN} | – | | 3.0 | – | 36.0 | V | – |
| Ripple rejection | RR | V _{IN} = 13.5 V, I _{OUT} = 30 mA, f = 100 Hz, ΔV _{rip} = 1.0 V _{p-p} | V _{OUT(S)} = 3.3 V | – | 65 | – | dB | 3 |
| | | | V _{OUT(S)} = 5.0 V | – | 60 | – | dB | 3 |
| Limit current* ⁶ | I _{LIM} | V _{IN} = V _{OUT(S)} + 1.0 V, Ta = +25°C | | 250 | 450 | 650 | mA | 2 |
| Short-circuit current | I _{short} | V _{IN} = 13.5 V, V _{OUT} = 0 V, Ta = +25°C | | 40 | 80 | 120 | mA | 2 |
| Thermal shutdown detection temperature | T _{SD} | Junction temperature | | – | 170 | – | °C | – |
| Thermal shutdown release temperature | T _{SR} | Junction temperature | | – | 135 | – | °C | – |

*1. The accuracy is guaranteed when the input voltage, output current, and temperature satisfy the conditions listed above.

$V_{OUT(S)}$: Set output voltage

$V_{OUT(E)}$: Actual output voltage

*2. The output current when increasing the output current gradually until the output voltage has reached the value of 95% of $V_{OUT(E)}$.

*3. The difference between input voltage (V_{IN1}) and the output voltage when decreasing input voltage (V_{IN}) gradually until the output voltage has dropped out to the value of 98% of output voltage (V_{OUT3}).

V_{drop} : $V_{IN1} - (V_{OUT3} \times 0.98)$

V_{OUT3} : Output voltage when $V_{IN} = V_{OUT(S)} + 1.0 \text{ V}$

*4. The dependency of the output voltage against the input voltage. The value shows how much the output voltage changes due to a change in the input voltage while keeping output current constant.

*5. The dependency of the output voltage against the output current. The value shows how much the output voltage changes due to a change in the output current while keeping input voltage constant.

*6. The current limited by overcurrent protection circuit.

*7. Due to limitation of the power dissipation, this value may not be satisfied. Attention should be paid to the power dissipation when the output current is large.

This specification is guaranteed by design.

2. Detector block

Table 14

($T_J = -40^{\circ}\text{C}$ to $+150^{\circ}\text{C}$ unless otherwise specified)

| Item | Symbol | Condition | Min. | Typ. | Max. | Unit | Test Circuit |
|--------------------------|-------------------|---|--------------------------------|----------------------|------------------------------|------------------|--------------|
| Detection voltage*1 | $-V_{\text{DET}}$ | — | $-V_{\text{DET(S)}} - 2.0\%$ | $-V_{\text{DET(S)}}$ | $-V_{\text{DET(S)}} + 2.0\%$ | V | 4 |
| Hysteresis width*2 | V_{HYS} | — | 120 | 150 | 180 | mV | 4 |
| Reset output voltage "H" | V_{ROH} | — | $V_{\text{OUT(S)}} \times 0.9$ | — | — | V | 4 |
| Reset output voltage "L" | V_{ROL} | $V_{\text{OUT}} \geq 1.0 \text{ V}$, $R_{\text{extR}} \geq 3 \text{ k}\Omega$, Connected to V_{OUT} pin | — | 0.2 | 0.4 | V | 4 |
| Reset pull-up resistance | R_{RO} | V_{OUT} pin internal resistance, $V_{\text{OUT}} \geq +V_{\text{DET}}$ | 20 | 30 | 45 | $\text{k}\Omega$ | — |
| Reset output current | I_{RO} | $V_{\text{RO}} = 0.4 \text{ V}$, $V_{\text{OUT}} = -V_{\text{DET(S)}} \times 0.95$ | 3.0 | — | — | mA | 5 |
| Release delay time*3 | t_{rd} | $C_{\text{DLY}} = 10 \text{ nF}$ | 16 | 20 | 24 | ms | 4 |
| Reset reaction time*4 | t_{rr} | — | — | — | 200 | μs | 4 |

*1. The V_{OUT} pin voltage at which the output of the RO pin switches from "H" to "L".

$-V_{\text{DET(S)}}$: Set detection voltage

$-V_{\text{DET}}$: Actual detection voltage

*2. The voltage difference between the detection voltage ($-V_{\text{DET}}$) and the release voltage ($+V_{\text{DET}}$). The relation between the actual output voltage ($V_{\text{OUT(E)}}$) of the regulator block and the actual release voltage ($+V_{\text{DET}} = -V_{\text{DET}} + V_{\text{HYS}}$) of the detector block is as follows.

$V_{\text{OUT(E)}} > +V_{\text{DET}}$

*3. The time from when V_{OUT} exceeds $+V_{\text{DET}}$ to when the RO pin output inverts (Refer to **Figure 6**). This value changes according to the release delay time and monitoring time adjustment capacitor (C_{DLY}).

*4. The time from when V_{OUT} falls below $-V_{\text{DET}}$ to when the RO pin output inverts (Refer to **Figure 7**).

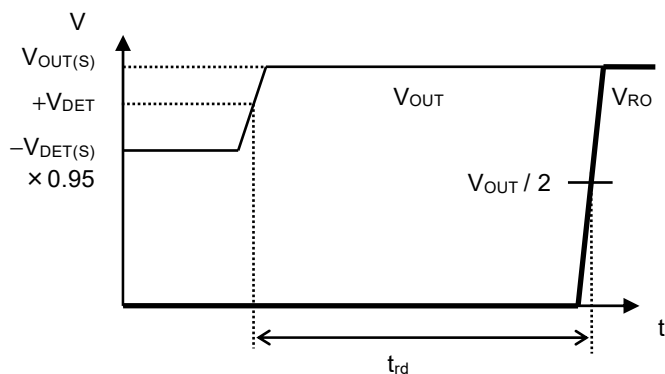


Figure 6 Release Delay Time

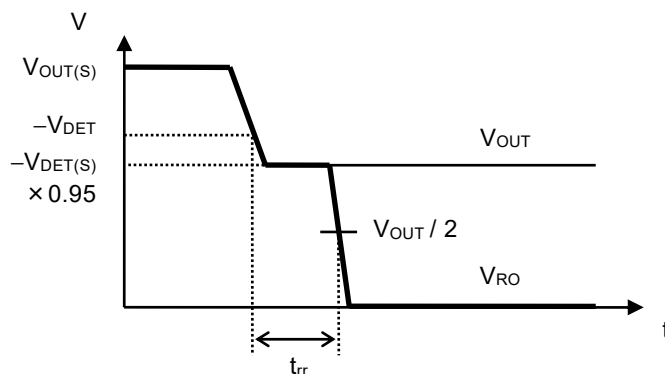


Figure 7 Reset Reaction Time

3. Watchdog timer block

3.1 S-19504 Series (Product with WEN pin)

Table 15

($V_{IN} = 13.5 \text{ V}$, $T_J = -40^\circ\text{C}$ to $+150^\circ\text{C}$ unless otherwise specified)

| Item | Symbol | Condition | Min. | Typ. | Max. | Unit | Test Circuit |
|---|----------------------------|--|-------------------------|------|-------------------------|---------------|--------------|
| Watchdog activation threshold current | $I_{O,WDact}$ | WADJ pin is open | 1.1 | 1.5 | 1.9 | mA | 6 |
| Watchdog deactivation threshold current | $I_{O,WDdeact}$ | WADJ pin is open | – | 1.25 | – | mA | 6 |
| Watchdog activation hysteresis current | $I_{O,WDhys}$ | WADJ pin is open | 0.1 | 0.25 | 0.4 | mA | 6 |
| Watchdog activation threshold voltage | $V_{WADJ,th}$ | – | 1.2 | 1.25 | 1.33 | V | 7 |
| WADJ pin current ratio | $\frac{I_{OUT}}{I_{WADJ}}$ | $V_{WADJ} = 0 \text{ V}$, $I_{OUT} = 10 \text{ mA}$ | – | 1700 | – | – | 7 |
| WADJ pin internal resistance | $R_{WADJ,int}$ | – | 1000 | 1400 | 1800 | k Ω | – |
| WI pin input voltage "H" | $V_{SH,WI}$ | – | $V_{OUT(S)} \times 0.7$ | – | – | V | 8 |
| WI pin input voltage "L" | $V_{SL,WI}$ | – | – | – | $V_{OUT(S)} \times 0.3$ | V | 8 |
| WI pin input current "H" | $I_{SH,WI}$ | $V_{WI} = V_{OUT(S)}$ | – | – | 1 | μA | 8 |
| WI pin input current "L" | $I_{SL,WI}$ | $V_{WI} = 0 \text{ V}$ | – | – | 0.1 | μA | 8 |
| WEN pin input voltage "H" | $V_{SH,WEN}$ | – | 2 | – | – | V | 9 |
| WEN pin input voltage "L" | $V_{SL,WEN}$ | – | – | – | 0.8 | V | 9 |
| WEN pin input current "H" | $I_{SH,WEN}$ | $V_{WEN} = V_{OUT(S)}$ | – | – | 1 | μA | 9 |
| WEN pin input current "L" | $I_{SL,WEN}$ | $V_{WEN} = 0 \text{ V}$ | – | – | 0.1 | μA | 9 |
| Watchdog output "L" time*1 | $t_{WD,L}$ | $C_{DLY} = 10 \text{ nF}$ | 9.2 | 11.5 | 13.8 | ms | 10 |
| Watchdog trigger time*2 | $t_{WI,tr}$ | $C_{DLY} = 10 \text{ nF}$ | 39.1 | 46 | 52.9 | ms | 10 |

*1. The time when the WO / RO pin continues "L" after the watchdog timer detects a time-out (Refer to **Figure 8**). This value changes according to C_{DLY} .

*2. The time from when the watchdog timer initiates the detection of a trigger signal to when a time-out is detected and the WO / RO pin output changes to "L" (Refer to **Figure 8**). This value changes according to C_{DLY} .

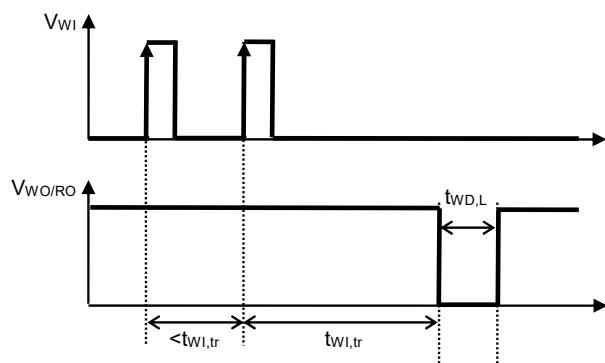


Figure 8 Watchdog Trigger Time

3.2 S-19505 Series (Product without WEN pin)

Table 16

($V_{IN} = 13.5\text{ V}$, $T_j = -40^\circ\text{C}$ to $+150^\circ\text{C}$ unless otherwise specified)

| Item | Symbol | Condition | Min. | Typ. | Max. | Unit | Test Circuit |
|---|----------------------------|--|-------------------------|------|-------------------------|---------------|--------------|
| Watchdog activation threshold current | $I_{O,WDact}$ | WADJ pin is open | 1.1 | 1.5 | 1.9 | mA | 6 |
| Watchdog deactivation threshold current | $I_{O,WDdeact}$ | WADJ pin is open | — | 1.25 | — | mA | 6 |
| Watchdog activation hysteresis current | $I_{O,WDhys}$ | WADJ pin is open | 0.1 | 0.25 | 0.4 | mA | 6 |
| Watchdog activation threshold voltage | $V_{WADJ,th}$ | — | 1.2 | 1.25 | 1.33 | V | 7 |
| WADJ pin current ratio | $\frac{I_{OUT}}{I_{WADJ}}$ | $V_{WADJ} = 0\text{ V}$, $I_{OUT} = 10\text{ mA}$ | — | 1700 | — | — | 7 |
| WADJ pin internal resistance | $R_{WADJ,int}$ | — | 1000 | 1400 | 1800 | k Ω | — |
| WI pin input voltage "H" | $V_{SH,WI}$ | — | $V_{OUT(S)} \times 0.7$ | — | — | V | 8 |
| WI pin input voltage "L" | $V_{SL,WI}$ | — | — | — | $V_{OUT(S)} \times 0.3$ | V | 8 |
| WI pin input current "H" | $I_{SH,WI}$ | $V_{WI} = V_{OUT(S)}$ | — | — | 1 | μA | 8 |
| WI pin input current "L" | $I_{SL,WI}$ | $V_{WI} = 0\text{ V}$ | — | — | 0.1 | μA | 8 |
| Watchdog output voltage "H" | V_{WOH} | — | $V_{OUT(S)} \times 0.9$ | — | — | V | 6 |
| Watchdog output voltage "L" | V_{WOL} | $R_{extW} \geq 3\text{ k}\Omega$, Connected to VOUT pin | — | 0.2 | 0.4 | V | 6 |
| Watchdog pull-up resistance | R_{WO} | VOUT pin internal resistance, $V_{OUT} \geq +V_{DET}$ | 20 | 30 | 45 | k Ω | — |
| Watchdog output current | I_{WO} | $V_{WO} = 0.4\text{ V}$, $V_{OUT} = -V_{DET(S)} \times 0.95$ | 3.0 | — | — | mA | 9 |
| Watchdog output "L" time*1 | $t_{WD,L}$ | $C_{DLY} = 10\text{ nF}$ | 9.2 | 11.5 | 13.8 | ms | 10 |
| Watchdog trigger time*2 | $t_{WI,tr}$ | $C_{DLY} = 10\text{ nF}$ | 39.1 | 46 | 52.9 | ms | 10 |

*1. The time when the WO pin continues "L" after the watchdog timer detects a time-out (Refer to **Figure 9**). This value changes according to C_{DLY} .

*2. The time from when the watchdog timer initiates the detection of a trigger signal to when a time-out is detected and the WO pin output changes to "L" (Refer to **Figure 9**). This value changes according to C_{DLY} .

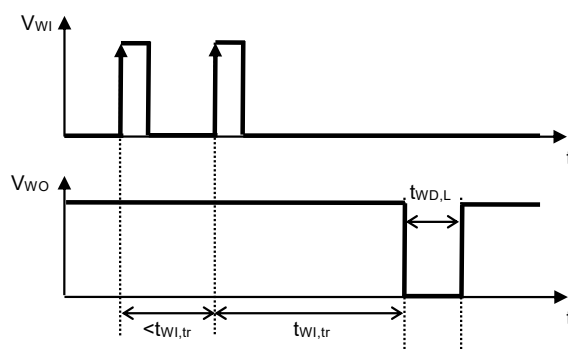


Figure 9 Watchdog Trigger Time

4. Overall

Table 17

($V_{IN} = 13.5\text{ V}$, $T_J = -40^\circ\text{C}$ to $+150^\circ\text{C}$ unless otherwise specified)

| Item | Symbol | Condition | Min. | Typ. | Max. | Unit | Test Circuit |
|--------------------------------------|-----------|---|------|------|------|---------------|--------------|
| Current consumption during operation | I_{SS1} | $I_{OUT} \leq 10\text{ }\mu\text{A}$, during watchdog timer deactivation | – | 3.0 | 9.5 | μA | 10 |
| | | $I_{OUT} \leq 0.1\text{ mA}$, during watchdog timer activation, WADJ pin is connected to VOUT pin, WO pin = "H" | – | 5.0 | 12.5 | μA | 10 |

■ Test Circuits

1. S-19504 Series (Product with WEN pin)

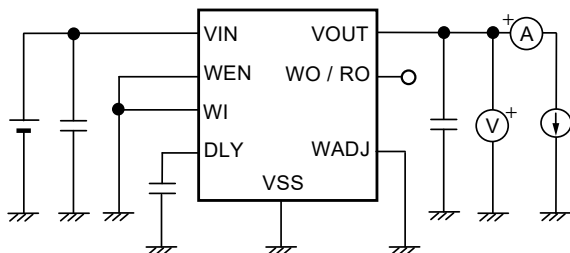


Figure 10 Test Circuit 1

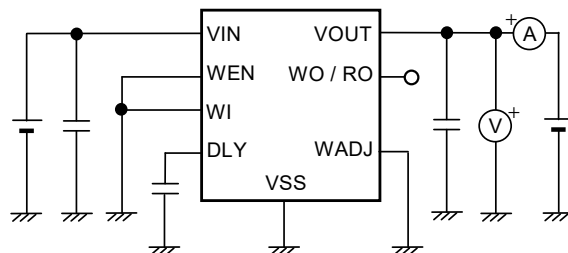


Figure 11 Test Circuit 2

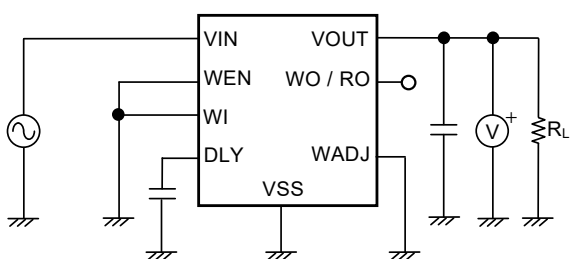


Figure 12 Test Circuit 3

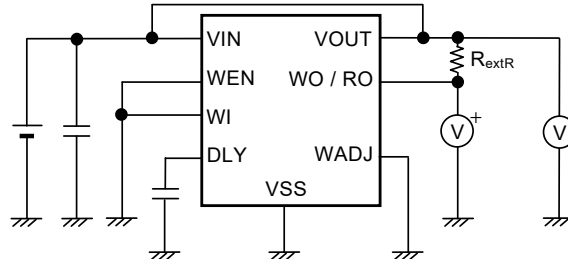


Figure 13 Test Circuit 4

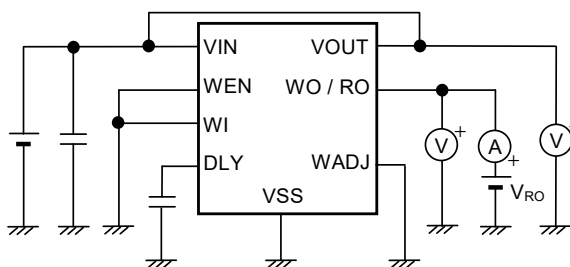


Figure 14 Test Circuit 5

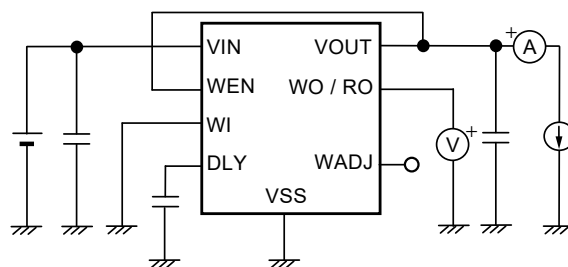


Figure 15 Test Circuit 6

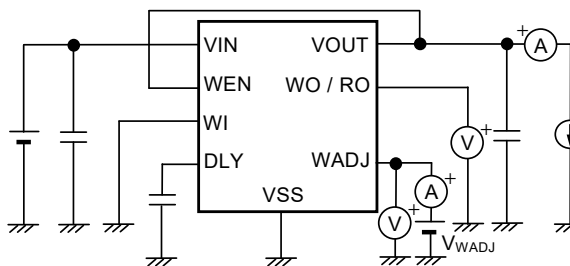


Figure 16 Test Circuit 7

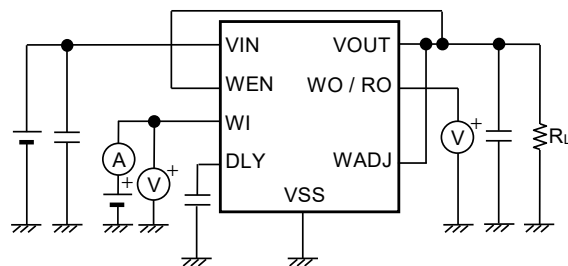


Figure 17 Test Circuit 8

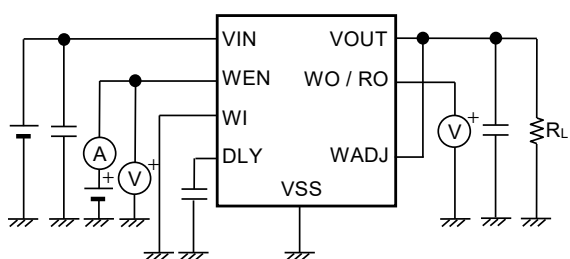


Figure 18 Test Circuit 9

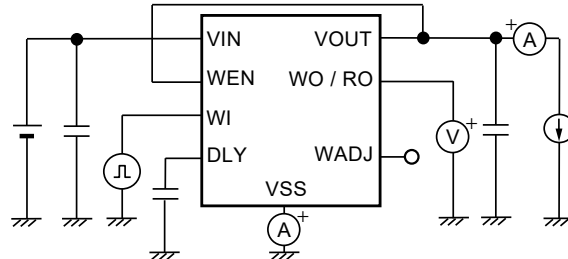


Figure 19 Test Circuit 10

2. S-19505 Series (Product without WEN pin)

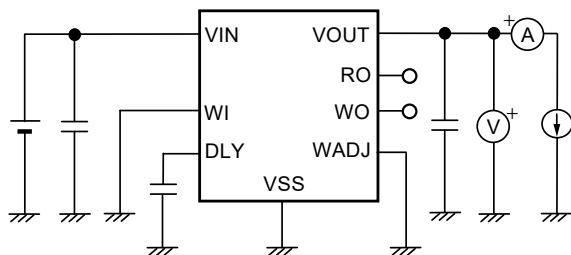


Figure 20 Test Circuit 1

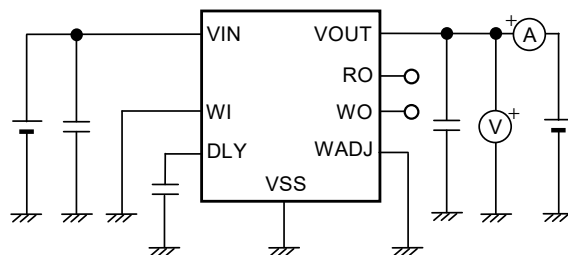


Figure 21 Test Circuit 2

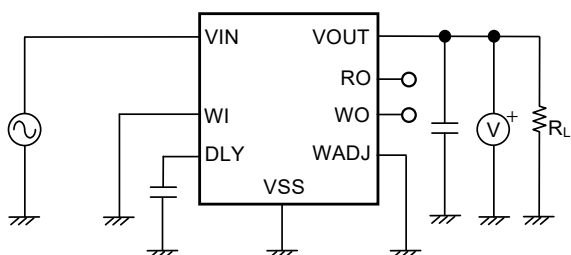


Figure 22 Test Circuit 3

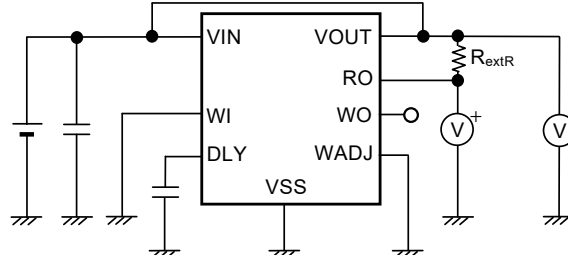


Figure 23 Test Circuit 4

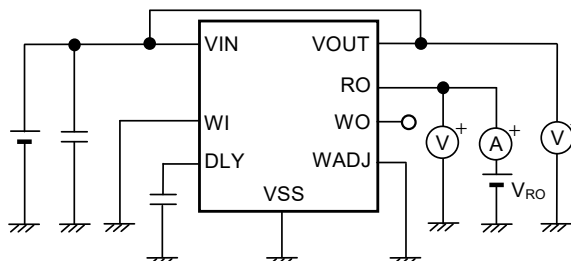


Figure 24 Test Circuit 5

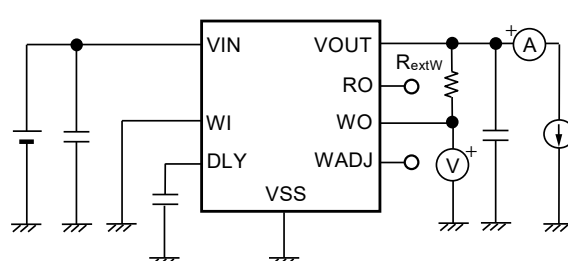


Figure 25 Test Circuit 6

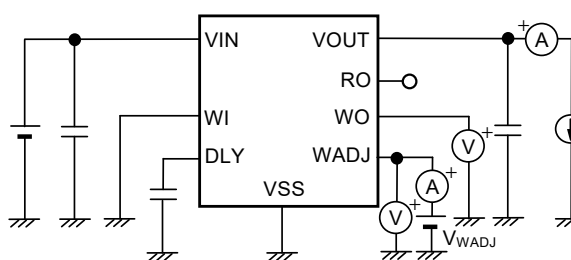


Figure 26 Test Circuit 7

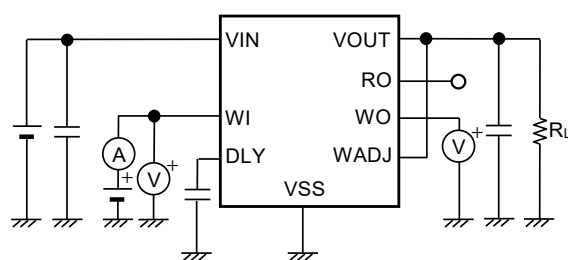


Figure 27 Test Circuit 8

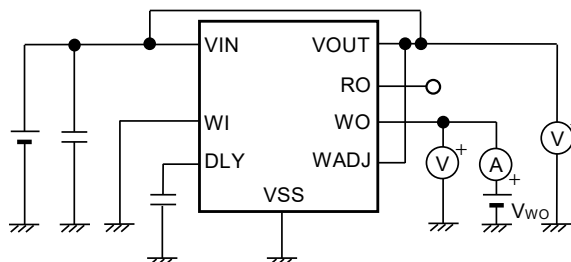


Figure 28 Test Circuit 9

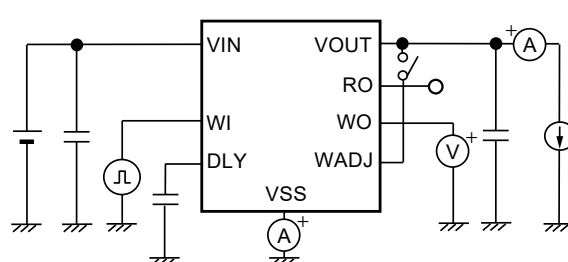


Figure 29 Test Circuit 10

■ Standard Circuits

1. S-19504 Series (Product with WEN pin)

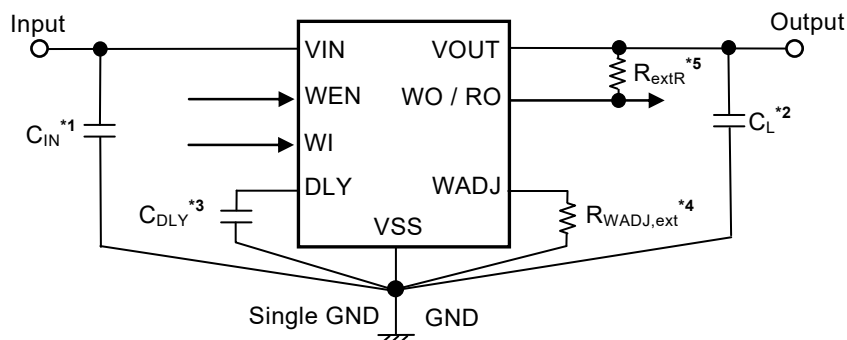


Figure 30

2. S-19505 Series (Product without WEN pin)

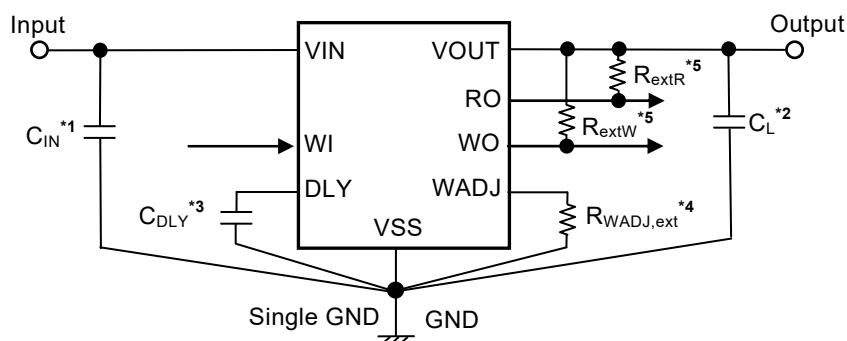


Figure 31

- *1. C_{IN} is a capacitor for stabilizing the input.
- *2. C_L is a capacitor for stabilizing the output.
- *3. C_{DLY} is the release delay time and monitoring time adjustment capacitor.
- *4. $R_{WADJ,ext}$ is the watchdog activation threshold current adjustment resistor.
- *5. R_{extR} and R_{extW} are the external pull-up resistors for the reset output pin and the watchdog output pin, respectively. Connection of the external pull-up resistor is not absolutely essential since the S-19504/19505 Series has a built-in pull-up resistor.

Caution The above connection diagram and constants will not guarantee successful operation. Perform thorough evaluation using an actual application to set the constants.

■ Selection of External Parts

1. Input and output capacitors (C_{IN} , C_L)

The S-19504/19505 Series requires C_L between the VOUT pin and the VSS pin for phase compensation. Operation is stabilized by a ceramic capacitor with an output capacitance of 1.0 μ F or more over the entire temperature range. When using an OS capacitor, a tantalum capacitor, or an aluminum electrolytic capacitor, the capacitance must be 1.0 μ F or more, and the ESR must be 100 Ω or less.

The values of output overshoot and undershoot, which are transient response characteristics, vary depending on the value of the output capacitor.

The required value of capacitance for the input capacitor differs depending on the application.

Caution Define the capacitance of C_{IN} and C_L by sufficient evaluation including the temperature characteristics under the actual usage conditions.

2. Release delay time and monitoring time adjustment capacitor (C_{DLY})

In the S-19504/19505 Series, the release delay time and monitoring time adjustment capacitor (C_{DLY}) is necessary between the DLY pin and the VSS pin to adjust the release delay time (t_{rd}) of the detector and the monitoring time of the watchdog timer.

The set release delay time ($t_{rd(S)}$), the set watchdog trigger time ($t_{WI, tr(S)}$), and the set watchdog output "L" time ($t_{WD, L(S)}$) are calculated by using following equations, respectively.

The release delay time (t_{rd}), the watchdog trigger time ($t_{WI, tr}$), and the watchdog output "L" time ($t_{WD, L}$) at the time of the condition of $C_{DLY} = 10$ nF are shown in "■ Electrical Characteristics".

$$t_{rd(S)} [\text{ms}] = t_{rd} [\text{ms}] \times \frac{C_{DLY} [\text{nF}]}{10 [\text{nF}]}$$

$$t_{WI, tr(S)} [\text{ms}] = t_{WI, tr} [\text{ms}] \times \frac{C_{DLY} [\text{nF}]}{10 [\text{nF}]}$$

$$t_{WD, L(S)} [\text{ms}] = t_{WD, L} [\text{ms}] \times \frac{C_{DLY} [\text{nF}]}{10 [\text{nF}]}$$

- Caution 1.** The above equations will not guarantee successful operation. Perform thorough evaluation including the temperature characteristics using an actual application to set the constants.
2. Mounted board layout should be made in such a way that no current flows into or flows from the DLY pin since the impedance of the DLY pin is high, otherwise correct delay time and monitoring time may not be provided.
 3. Select C_{DLY} whose leakage current can be ignored against the built-in constant current (0.6 μ A typ.). The leakage current may cause deviation in delay time and monitoring time. When the leakage current is larger than the built-in constant current, no release takes place.
 4. Deviations of C_{DLY} are not included in the equations mentioned above. Be sure to determine the constants considering the deviation of C_{DLY} to be used.

3. Watchdog activation threshold current adjustment resistor ($R_{WADJ,ext}$)

In the S-19504/19505 Series, the watchdog activation threshold current adjustment resistor ($R_{WADJ,ext}$) can be connected between the WADJ pin and the VSS pin to adjust the watchdog timer activation threshold current.

The set watchdog activation threshold current ($I_{O,WDact(S)}$), the set watchdog deactivation threshold current ($I_{O,WDdeact(S)}$) and the set watchdog activation hysteresis current ($I_{O,WDhys(s)}$) are calculated by using following equations, respectively.

The watchdog activation threshold current ($I_{O,WDact}$), the watchdog deactivation threshold current ($I_{O,WDdeact}$) and the watchdog activation hysteresis current ($I_{O,WDhys}$) when the WADJ pin is open are shown in "■ **Electrical Characteristics**".

$$I_{O,WDact(S)} [mA] = I_{O,WDact} [mA] \times \left(1 + \frac{R_{WADJ,int} [k\Omega]}{R_{WADJ,ext} [k\Omega]} \right)$$

$$I_{O,WDdeact(S)} [mA] = I_{O,WDdeact} [mA] \times \left(1 + \frac{R_{WADJ,int} [k\Omega]}{R_{WADJ,ext} [k\Omega]} \right)$$

$$I_{O,WDhys(S)} [mA] = I_{O,WDact(S)} [mA] - I_{O,WDdeact(S)} [mA]$$

- Caution 1.** The above equations will not guarantee successful operation. Perform thorough evaluation including the temperature characteristics using an actual application to set the constants.
2. Mounted board layout should be made in such a way that no current flows into or flows from the WADJ pin since the impedance of the WADJ pin is high, otherwise correct $I_{O,WDact}$ and $I_{O,WDdeact}$ may not be provided.
 3. Refer to "3. 2 Autonomous watchdog operation function (Output current detection circuit)" in "■ **Operation**" for the details.

■ Operation

1. Regulator block

1.1 Basic operation

Figure 32 shows the block diagram of the regulator in the S-19504/19505 Series.

The error amplifier compares the reference voltage (V_{ref}) with feedback voltage (V_{fb}), which is the output voltage resistance-divided by feedback resistors (R_s and R_f). It supplies the gate voltage necessary to maintain the constant output voltage which is not influenced by the input voltage and temperature change, to the output transistor.

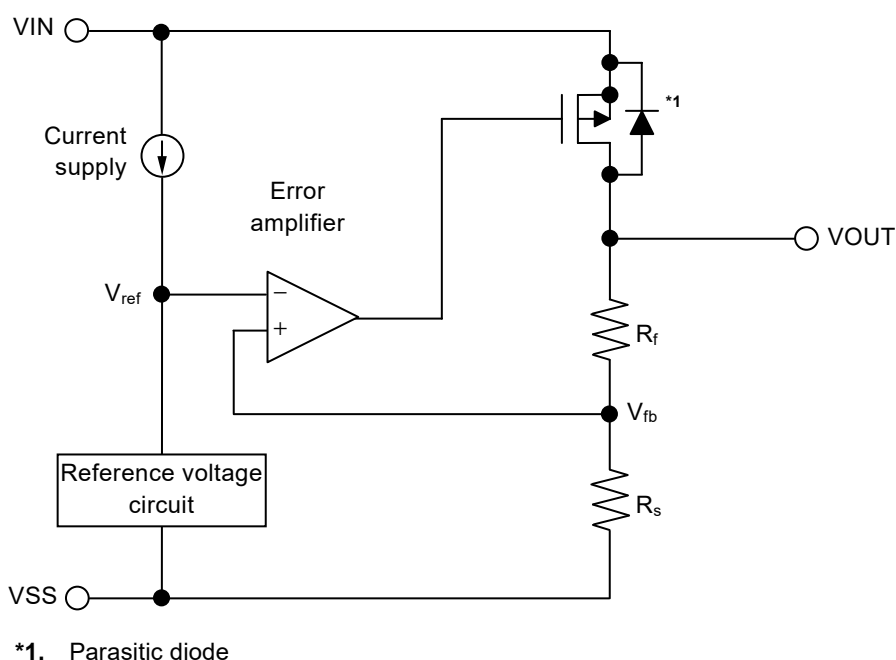


Figure 32

1.2 Output transistor

In the S-19504/19505 Series, a low on-resistance P-channel MOS FET is used as the output transistor.

Be sure that V_{OUT} does not exceed $V_{IN} + 0.3$ V to prevent the voltage regulator from being damaged due to reverse current flowing from the VOUT pin through a parasitic diode to the VIN pin, when the potential of V_{OUT} became higher than V_{IN} .

1.3 Overcurrent protection circuit

The S-19504/19505 Series includes an overcurrent protection circuit which having the characteristics shown in "1. 1 Output voltage vs. Output current (When load current increases) ($T_a = +25^\circ\text{C}$)" of "1. Regulator block" in "■ Characteristics (Typical Data)", in order to limit an excessive output current and overcurrent of the output transistor due to short-circuiting between the VOUT pin and the VSS pin. The current when the output pin is short-circuited (I_{short}) is internally set at 80 mA typ., and the load current when short-circuiting is limited based on this value. The output voltage restarts regulating if the output transistor is released from overcurrent status.

Caution This overcurrent protection circuit does not work as for thermal protection. If this IC long keeps short circuiting, pay attention to the conditions of input voltage and load current so that, under the usage conditions including short circuit, the loss of the IC will not exceed power dissipation.

1.4 Thermal shutdown circuit

The S-19504/19505 Series has a thermal shutdown circuit to limit self-heating. When the junction temperature rises to 170°C typ., the thermal shutdown circuit operates to stop regulating. After that, when the junction temperature drops to 135°C typ., the thermal shutdown circuit is released to restart regulating.

Due to self-heating of the S-19504/19505 Series, if the thermal shutdown circuit starts operating, it stops regulating so that the output voltage drops. For this reason, self-heating is limited and the IC's temperature drops. When the temperature drops, the thermal shutdown circuit is released to restart regulating, thus self-heating is generated again due to rising of the output voltage. Repeating this procedure makes the waveform of the VOUT pin output into a pulse-like form. This phenomenon continues unless decreasing either or both of the input voltage and the output current in order to reduce the internal power consumption, or decreasing the ambient temperature. Note that the product may suffer physical damage such as deterioration if the above phenomenon occurs continuously.

Table 18

| Thermal Shutdown Circuit | VOUT Pin Voltage |
|-------------------------------------|-----------------------|
| Detect: 170°C typ.*1 | V_{SS} level |
| Release: 135°C typ.*1 | Set value |

*1. Junction temperature

2. Detector block

2.1 Basic operation

- (1) When the output voltage (V_{OUT}) of the regulator is release voltage ($+V_{DET}$) of the detector or higher, the Nch transistor (N1 and N2) are turned off and "H" is output to the RO pin. Since the Pch transistor (P1) is turned on, the input voltage to the comparator (C1) is $\frac{R_B \cdot V_{OUT}}{R_A + R_B}$.
- (2) Even if V_{OUT} decreases to $+V_{DET}$ or lower, "H" is output to the RO pin when V_{OUT} is the detection voltage ($-V_{DET}$) or higher. When V_{OUT} decreases to $-V_{DET}$ (point A in **Figure 34**) or lower, N1 which is controlled by C1 is turned on, and C_{DLY} is discharged. At the same time, N2, which is controlled by the delay circuit, is turned on, and "L" is output to the RO pin. At this time, P1 is turned off, and the input voltage to C1 is $\frac{R_B \cdot V_{OUT}}{R_A + R_B + R_C}$.
- (3) If V_{OUT} further decreases to the IC's minimum operation voltage or lower, the RO pin output becomes uncertain. If the RO pin is pulled up, "H" is output.
- (4) When V_{OUT} increases to the IC's minimum operation voltage or higher, "L" is output to the RO pin. Moreover, even if V_{OUT} exceeds $-V_{DET}$, the output is "L" when V_{OUT} is lower than $+V_{DET}$.
- (5) When V_{OUT} increases to $+V_{DET}$ (point B in **Figure 34**) or higher, N1 is turned off and C_{DLY} is charged. When V_{DLY} increases to the threshold voltage (1.25 V typ.), N2, which is controlled by a delay circuit, is turned off and "H" is output to the RO pin.

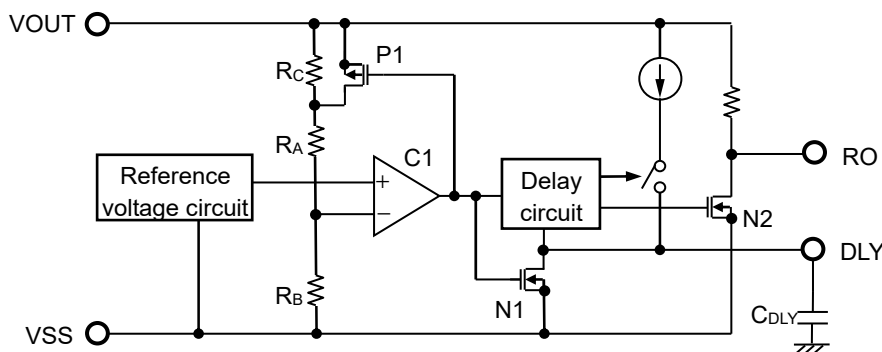


Figure 33 Operation of Detector Block

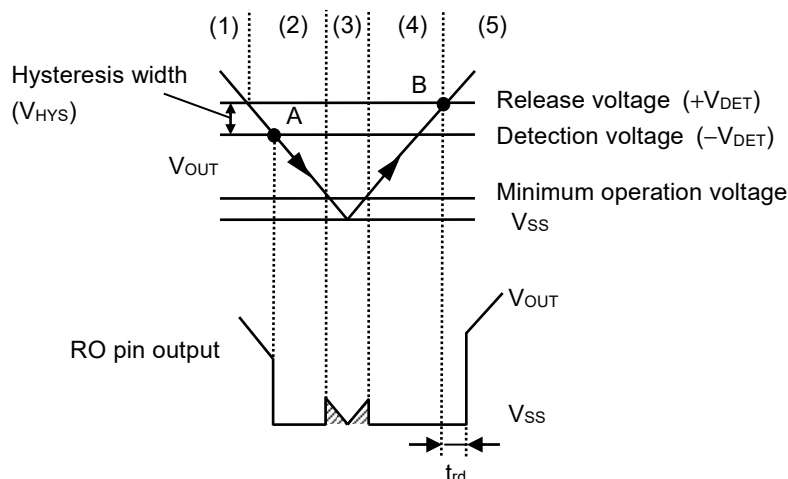


Figure 34 Timing Chart of Detector Block

2.2 Delay circuit

When the output voltage (V_{OUT}) of the regulator rises under the status that "L" is output to the RO pin, the reset release signal is output to the RO pin later than when V_{OUT} becomes $+V_{DET}$. The release delay time (t_{rd}) changes according to C_{DLY} . Refer to "**2 Release delay time and monitoring time adjustment capacitor (C_{DLY})**" in "**■ Selection of External Parts**" for details.

In addition, if the time from when V_{OUT} decreases to $-V_{DET}$ or lower to when V_{OUT} increases to $+V_{DET}$ or higher is significantly shorter compared to the length of the reset reaction time (t_r), "H" output may remain in the RO pin.

Caution Since t_{rd} depends on the charge time of C_{DLY} , t_{rd} may be shorter than the set value if the charge operation is initiated under the condition that a residual electric charge is left in C_{DLY} .

2.3 Output circuit

Since the RO pin has a built-in resistor to pull up to the VOUT pin internally, the RO pin can output a signal without an external pull-up resistor.

Do not connect to the pin other than VOUT pin when connecting an external pull-up resistor.

In the S-19504 Series, the reset output pin and the watchdog output pin are prepared as the WO / RO pin.

The output level of the WO / RO pin is applied by the AND logic of the reset output pin and the watchdog output pin.

Example: When the WO pin is "L" and the RO pin is "H", the WO / RO pin is "L".

Caution Define the external pull-up resistance by sufficient evaluation including the temperature characteristics under the actual usage conditions.

3. Watchdog timer block

3.1 Basic operation

The watchdog timer operates as follows during monitoring operation.

- (1) During monitoring operation of the watchdog timer, the C_{DLY} charge-discharge operation is carried out by an internal constant current source. The watchdog timer detects a trigger and the C_{DLY} is charged by an internal constant current source if a rising edge is input to the WI pin from a monitored object, and then V_{DLY} rises. The C_{DLY} discharge operation is started if V_{DLY} reaches the upper timing threshold voltage (V_{DU}). If the watchdog timer detects a trigger again during the C_{DLY} charge-discharge operation, the same operation is repeated. During this time, the WO pin outputs "H".
- (2) If the C_{DLY} charge-discharge operation is repeated four times while the watchdog timer detects no triggers, the WO pin outputs "L". This operation is called a "time-out detection". If the watchdog timer is deactivated while the WO pin is outputting "H", the number of charges and discharges are reset.
- (3) After a time-out detection, the C_{DLY} charge-discharge operation is carried out while the WO pin is outputting "L". After the charge-discharge operation is carried out one time, the WO pin outputs "H", and the C_{DLY} charge-discharge operation continues. Even if the watchdog timer is deactivated while the WO pin is outputting "L", the WO pin continues to output "L" until one C_{DLY} charge-discharge operation has completed.
- (4) After the WO pin reverts back to "H" from "L", the watchdog timer continually carries out operation (1) or (2) depending on input.

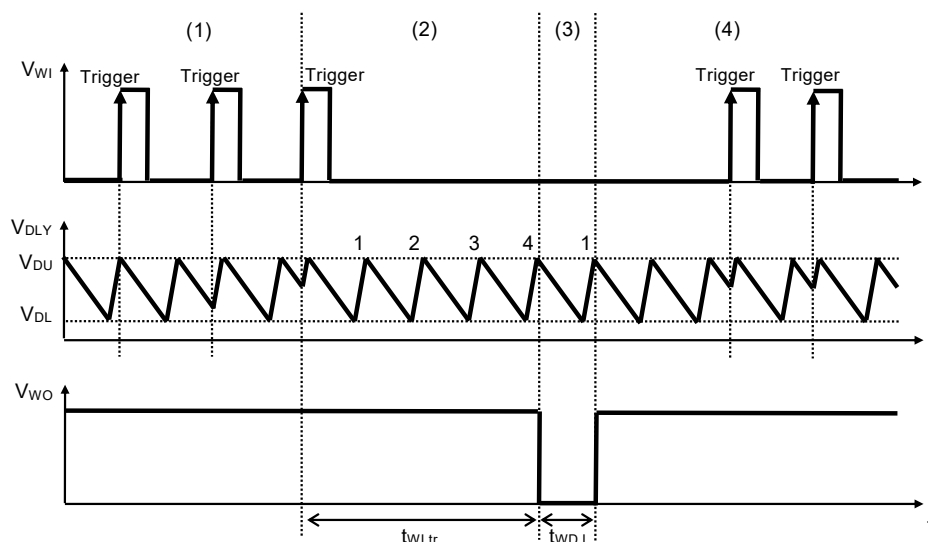


Figure 35 Timing Chart of Watchdog Timer Block

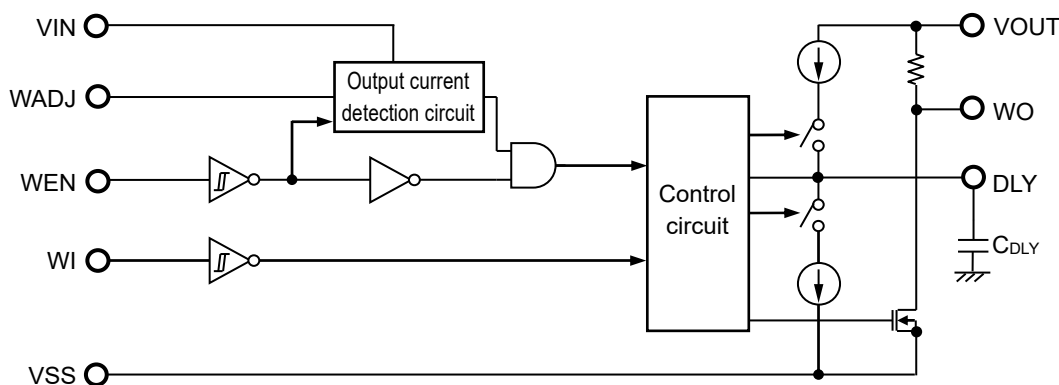


Figure 36 Operation of Watchdog Timer Block

3.2 Autonomous watchdog operation function (Output current detection circuit)

Since the S-19504/19505 Series has a built-in output current detection circuit, the watchdog timer operates autonomously. When using the autonomous watchdog operation function, the current flows in the load is detected by the output current of the regulator, the watchdog timer initiates the activation when the output current is the watchdog activation threshold current ($I_{O,WDact}$) or more, the watchdog timer is deactivated when the output current is the watchdog deactivation threshold current ($I_{O,WDdeact}$) or less.

Table 19 shows the connection of WADJ pin depending on the usage of the watchdog timer.

Table 19

| Usage of Watchdog Timer | Connection of WADJ Pin | Status of WADJ Pin |
|---|---|--|
| Watchdog timer is not in use | Connect to the VSS pin | "L" |
| Watchdog timer is always activated | Connect to the VOUT pin | "H" |
| Watchdog timer turns on and off autonomously depending on the load current (Autonomous watchdog operation function) | Open or connect to the VSS pin via an external resistor*1 | "H": $I_{OUT} > I_{O,WDact}$ "L": $I_{OUT} < I_{O,WDdeact}$ |

*1. Refer to "3. Watchdog activation threshold current adjustment resistor ($R_{WADJ,ext}$)" in "■ Selection of External Parts" for details.

Figure 37 shows a block diagram which includes an output current detection circuit. It shows the connection of each pin when using the autonomous watchdog operation function. If the regulator is connected to a microcontroller, the microcontroller operation current can be detected using the regulator output current. For example, if a constant of the watchdog activation threshold current adjustment resistor ($R_{WADJ,ext}$) is selected so that the microcontroller sleep operation current is lower than the watchdog deactivation threshold current ($I_{O,WDdeact}$), when the microcontroller sleeps, the watchdog timer autonomously deactivates monitoring operation. If a device other than a microcontroller is connected to the VOUT pin, take the connected device's current consumption into account when selecting $R_{WADJ,ext}$.

If the VIN pin voltage drops below the output current detection circuit minimum operation voltage, the output current detection circuit stops the operation. Refer to "■ Recommended Operation Conditions" for VIN pin voltage range.

In addition, in the S-19504 Series, if the watchdog timer is disabled using the WEN pin, the watchdog timer is deactivated regardless of the WADJ pin connection.

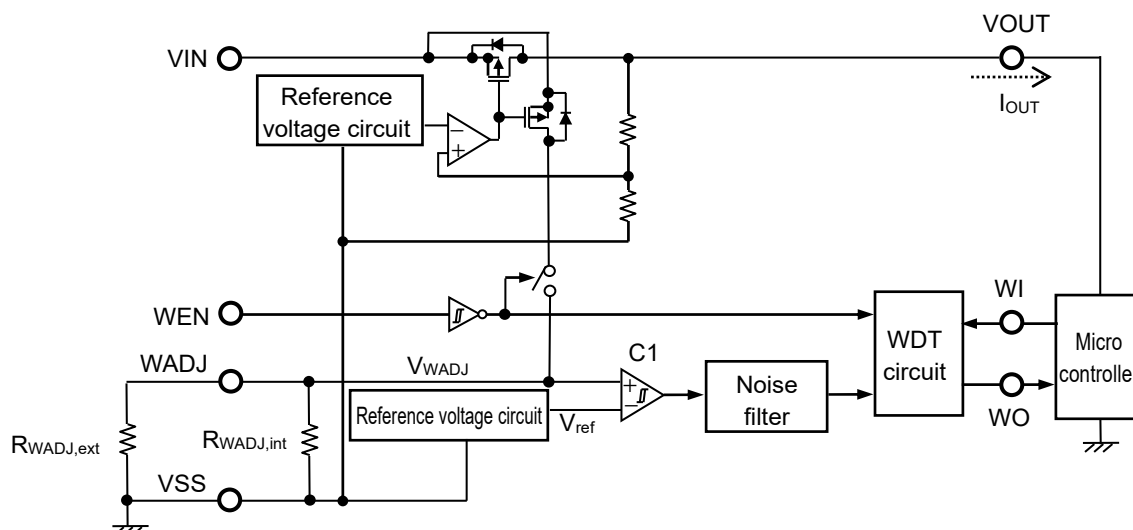


Figure 37 Operation of Output current Detection Circuit

Caution $R_{WADJ,ext}$ and microcontroller are not built-in in the S-19504/19505 Series. In addition, the above connection diagram will not guarantee successful operation. Perform thorough evaluation using the actual application to determine connections.

When using the autonomous watchdog operation function, the watchdog timer monitoring activation is as follows.

- (1) When I_{OUT} of the regulator is the watchdog activation threshold current ($I_{O,WDact}$) or more, the WADJ pin voltage (V_{WADJ}) is higher than the reference voltage (V_{ref}), and the output of the comparator (C1) is "H". At this time, the watchdog timer is activated.
- (2) When I_{OUT} decreases to the watchdog deactivation threshold current ($I_{O,WDdeact}$) (point A in **Figure 38**) or less, V_{WADJ} decreases to V_{ref} or less and the output of C1 is "L". At this time, the watchdog timer deactivates the monitoring. Even if I_{OUT} increases, the watchdog timer continues the monitoring deactivation when I_{OUT} is within less than $I_{O,WDact}$.
- (3) If I_{OUT} further increases to $I_{O,WDact}$ (point B in **Figure 38**) or more, V_{WADJ} increases to V_{ref} or higher and the output of C1 is "H". And then, the watchdog timer initiates the monitoring activation.

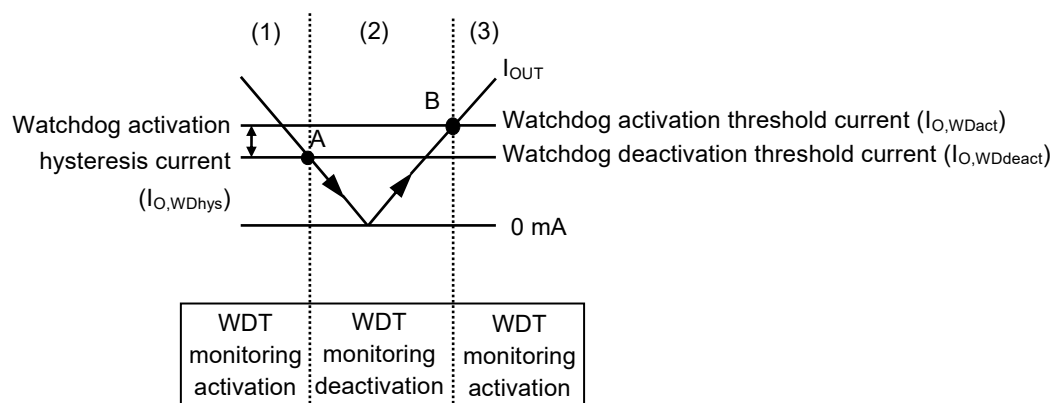


Figure 38 Autonomous Watchdog Operation Function

Caution Due to detecting I_{OUT} of the regulator, current flows through the resistors connected to the WADJ pin ($R_{WADJ,ext}$ and $R_{WADJ,int}$). Therefore, the WADJ pin voltage (V_{WADJ}) may fluctuate since the current flowing through $R_{WADJ,ext}$ and $R_{WADJ,int}$ also changes in the same way if the output current changes transiently. V_{WADJ} at that time should be evaluated with the actual device.

3.3 Watchdog enable circuit (only S-19504 Series)

When inputting "L" to the WEN pin, the watchdog timer becomes Disable and stops the output current detection operation and monitoring activation. When inputting "H" to the WEN pin, the watchdog timer becomes Enable. The watchdog timer monitoring activation is performed depending on the connection of the WADJ pin.

The WEN pin is pulled down internally by the constant current source. For this reason, the WEN pin is set to "L" when using the WEN pin in the floating status, and the watchdog timer becomes Disable. However, in order that the watchdog timer become Disable certainly, connect the WEN pin to GND so that "L" is input to the WEN pin certainly, since the impedance of the WEN pin becomes high when using the WEN pin in the floating status.

In order to fix the watchdog timer to Enable, connect the WEN pin to the VOUT pin so that "H" is input to the WEN pin.

3.4 Watchdog input circuit

By inputting a rising edge to the WI pin, the watchdog timer detects a trigger. Refer to "■ Recommended Operation Conditions" for the input conditions of the signal to be input from the watchdog timer monitored object to the WI pin.

The WI pin is pulled down internally by a constant current source. For this reason, if the WI pin is used in a floating status, the WI pin sets to "L".

Note that if any voltage other than "L" or "H" is input to the WI pin, the current consumption increases.

Triggers are detected only when the WO pin is outputting "H" and C_{DLY} charge-discharge operation is being carried out while the watchdog timer is carrying out monitoring operation.

Caution Under a noisy environment, the watchdog input circuit may detect the noise as a trigger signal. Sufficiently evaluate with the actual application to confirm that a trigger is detected only in the intended signal.

3.5 Watchdog output circuit

Since the WO pin has a built-in resistor to pull up to the VOUT pin internally, the WO pin can output a signal without an external pull-up resistor.

Do not connect to the pin other than VOUT pin when connecting an external pull-up resistor.

In the S-19504 Series, the reset output pin and the watchdog output pin are prepared as the WO / RO pin.

The output level of the WO / RO pin is applied by the AND logic of the reset output pin and the watchdog output pin.

Example: When the WO pin is "L" and the RO pin is "H", the WO / RO pin is "L".

Caution Define the external pull-up resistance by sufficient evaluation including the temperature characteristics under the actual usage conditions.

3.6 Each pin status and the watchdog timer monitoring operation

3.6.1 S-19504 Series (Product with WEN pin)

Table 20

| WDT | WADJ Status | VOUT Pin Voltage | WDT Monitoring Operation |
|---------------------|-------------|------------------|--------------------------|
| Enable (WEN = "H") | "H" | $\geq +V_{DET}$ | ON |
| Enable (WEN = "H") | "L" | $\geq +V_{DET}$ | OFF |
| Disable (WEN = "L") | Don't care | $\geq +V_{DET}$ | OFF |
| Don't care | Don't care | $\leq -V_{DET}$ | OFF |

3.6.2 S-19505 Series (Product without WEN pin)

Table 21

| WADJ Status | VOUT Pin Voltage | WDT Monitoring Operation |
|-------------|------------------|--------------------------|
| "H" | $\geq +V_{DET}$ | ON |
| "L" | $\geq +V_{DET}$ | OFF |
| Don't care | $\leq -V_{DET}$ | OFF |

■ Timing Charts

1. S-19504 Series (Product with WEN pin)

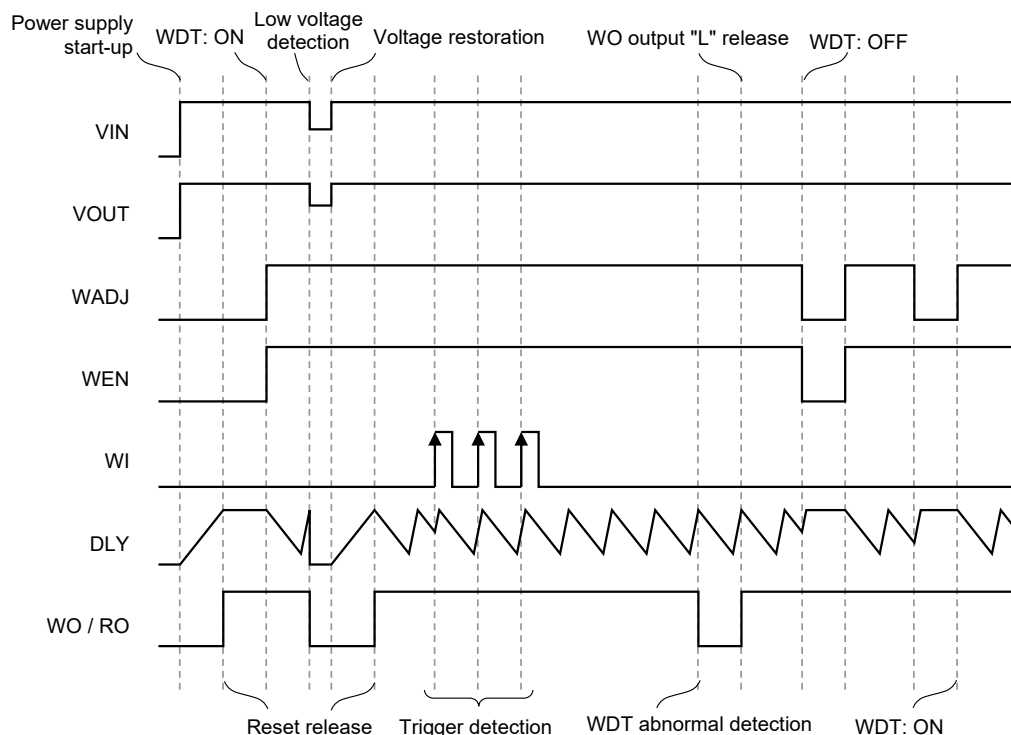


Figure 39

2. S-19505 Series (Product without WEN pin)

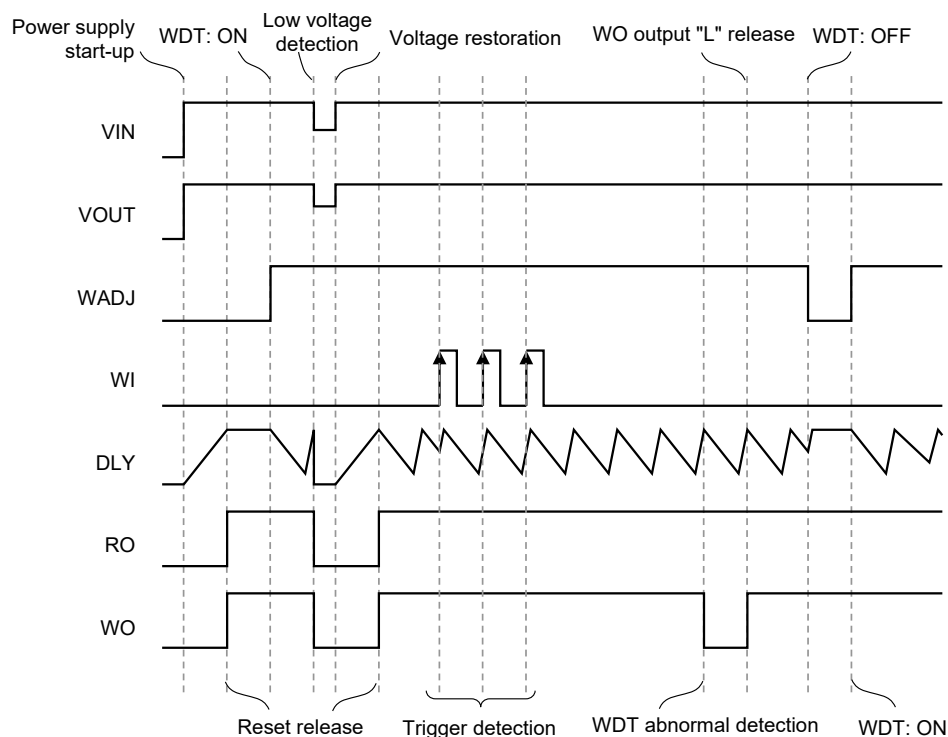


Figure 40

■ Precautions

- Wiring patterns for the VIN pin, the VOUT pin and GND should be designed so that the impedance is low. When mounting an output capacitor between the VOUT pin and the VSS pin (C_L) and an input capacitor between the VIN pin and the VSS pin (C_{IN}), the distance from the capacitors to these pins should be as short as possible.
- Note that generally the output voltage may increase when a series regulator is used at low load current (0.1 mA or less).
- Note that generally the output voltage may increase due to the leakage current from an output transistor when a series regulator is used at high temperature.
- Generally a series regulator may cause oscillation, depending on the selection of external parts. The following conditions are recommended for the S-19504/19505 Series. However, be sure to perform sufficient evaluation under the actual usage conditions for selection, including evaluation of temperature characteristics. Refer to "4. **Example of equivalent series resistance vs. Output current characteristics** ($T_a = -40^\circ\text{C}$ to $+125^\circ\text{C}$)" in "■ **Reference Data**" for the equivalent series resistance (R_{ESR}) of the output capacitor.

Input capacitor (C_{IN}): 1.0 μF or more



Output capacitor (C_L): 1.0 μF or more

- In a series regulator, generally the values of overshoot and undershoot in the output voltage vary depending on the variation factors of power-on, power supply fluctuation and load fluctuation, or output capacitance. Determine the conditions of the output capacitor after sufficiently evaluating the temperature characteristics of overshoot or undershoot in the output voltage with the actual device.
- The voltage regulator may oscillate when the impedance of the power supply is high and the input capacitance is small or an input capacitor is not connected.
- Overshoot may occur in the output voltage momentarily if the voltage is rapidly raised at power-on or when the power supply fluctuates. Sufficiently evaluate the output voltage at that time with the actual device.
- If the VOUT pin is steeply shorted with GND, a negative voltage exceeding the absolute maximum ratings may occur to the VOUT pin due to resonance of the wiring inductance and the output capacitance in the application. The negative voltage can be limited by inserting a protection diode between the VOUT pin and the VSS pin or inserting a series resistor to the output capacitor.
- The application conditions for the input voltage, the output voltage, and the load current should not exceed the power dissipation.
- Do not apply an electrostatic discharge to this IC that exceeds the performance ratings of the built-in electrostatic protection circuit.
- In determining the output current, attention should be paid to the output current value specified in **Table 13** in "■ **Electrical Characteristics**" and footnote *7 of the table.
- ABLIC Inc. claims no responsibility for any disputes arising out of or in connection with any infringement by products including this IC of patents owned by a third party.



■ Characteristics (Typical Data)

1. Regulator block



1.1 Output voltage vs. Output current (When load current increases) ($T_a = +25^\circ\text{C}$)

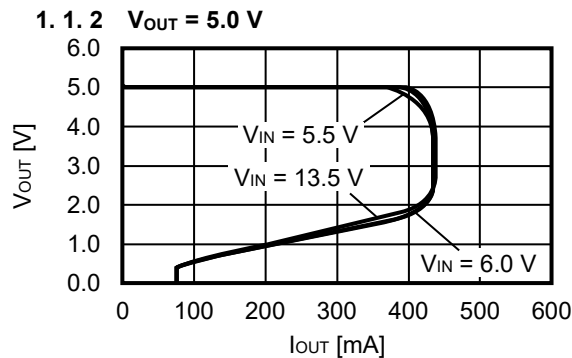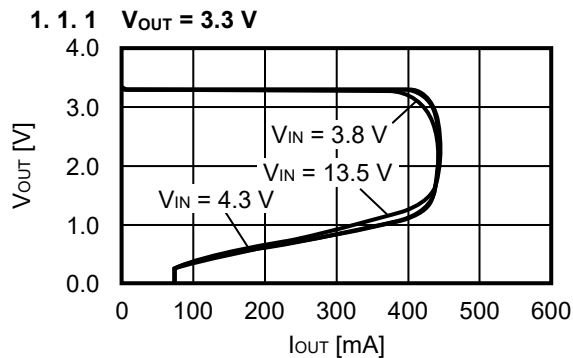



1.2 Output voltage vs. Input voltage ($T_a = +25^\circ\text{C}$)

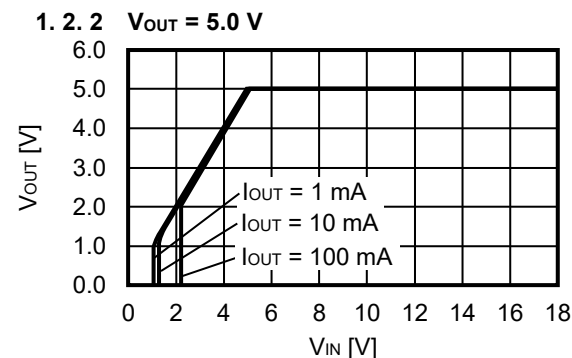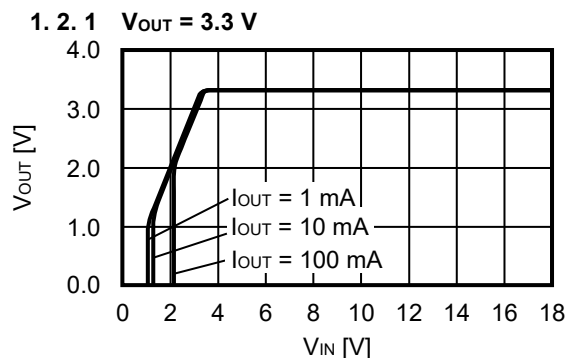

1.3 Dropout voltage vs. Output current

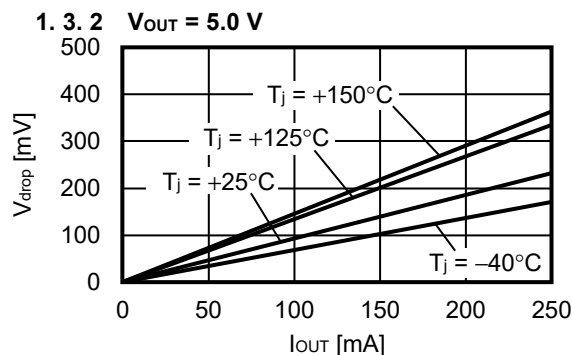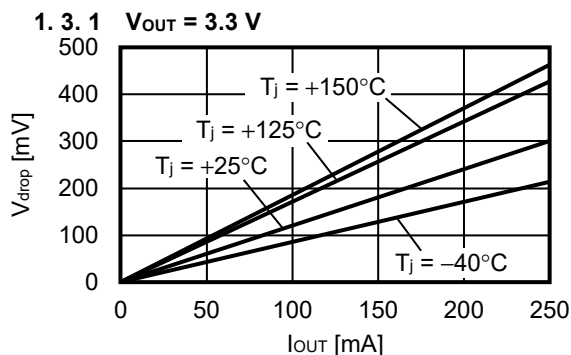


1.4 Dropout voltage vs. Junction temperature

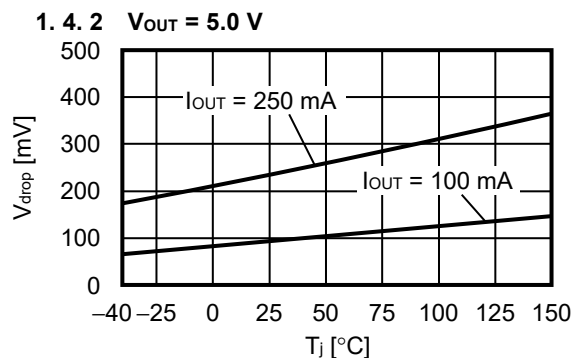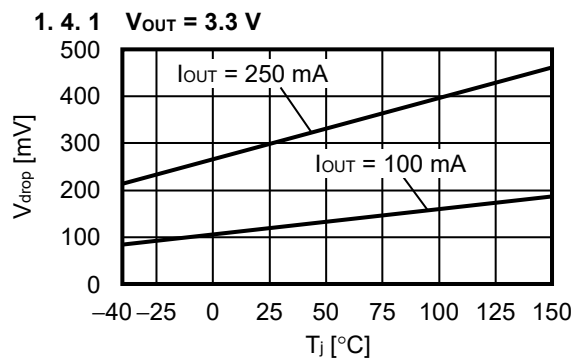


1.5 Output voltage vs. Junction temperature

1.5.1 $V_{OUT} = 3.3\text{ V}$

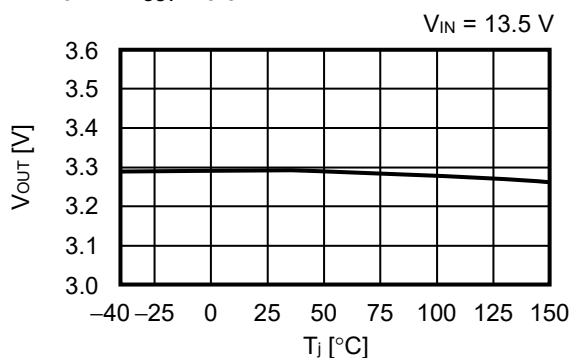


1.5.2 $V_{OUT} = 5.0\text{ V}$

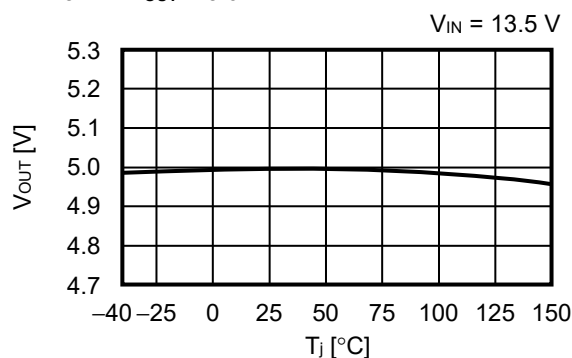


1.6 Ripple rejection ($T_a = +25^\circ\text{C}$)

1.6.1 $V_{OUT} = 3.3\text{ V}$

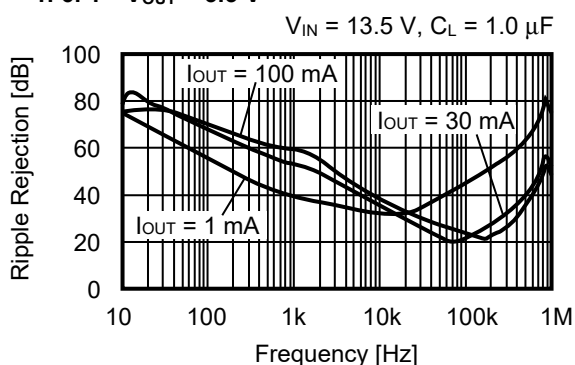


1.6.2 $V_{OUT} = 5.0\text{ V}$

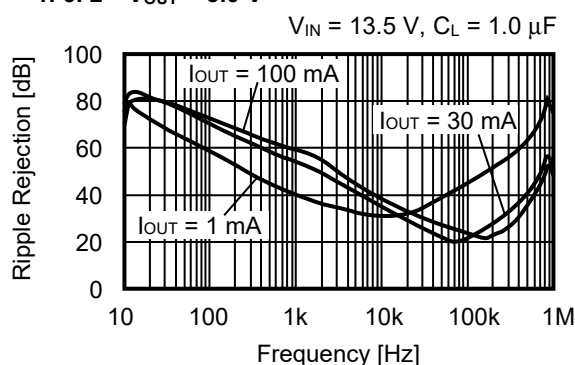


2. Detector block

2.1 Detection voltage, Release voltage vs. Junction temperature

2.1.1 $-V_{DET} = 2.6\text{ V}$

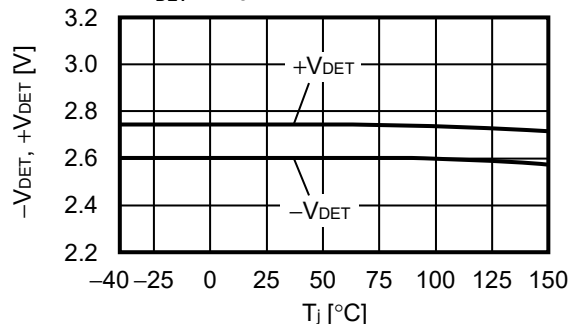


2.1.2 $-V_{DET} = 4.7\text{ V}$

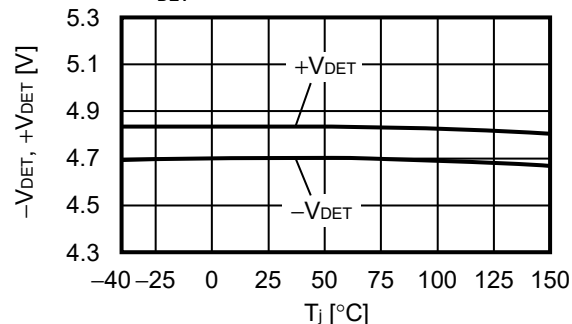


2.2 Hysteresis width vs. Junction temperature

2.2.1 $-V_{DET} = 2.6\text{ V}$

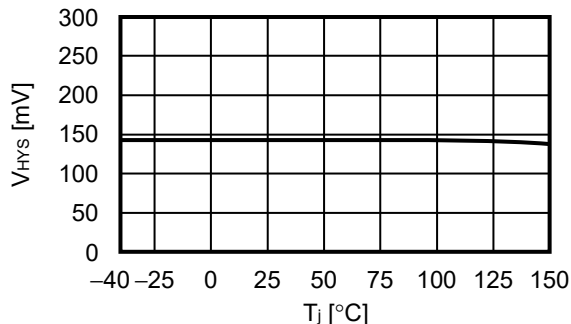


2.2.2 $-V_{DET} = 4.7\text{ V}$

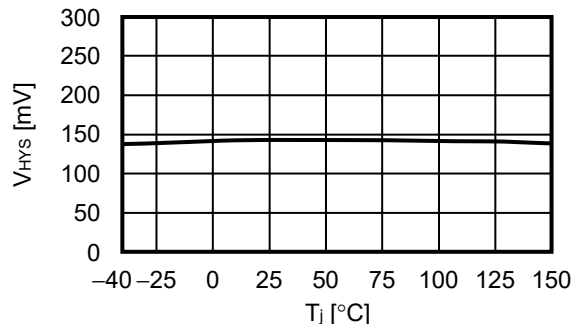


2.3 Reset output current vs. V_{DS}

2.3.1 $-V_{DET} = 2.6\text{ V}$

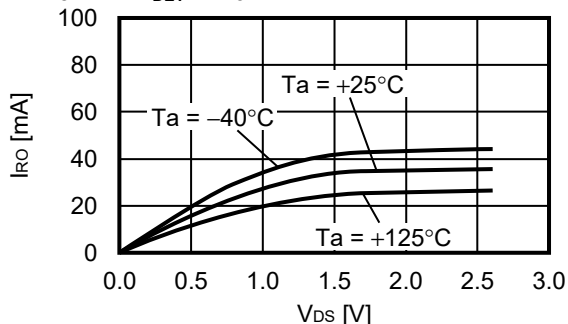


2.3.2 $-V_{DET} = 4.7\text{ V}$

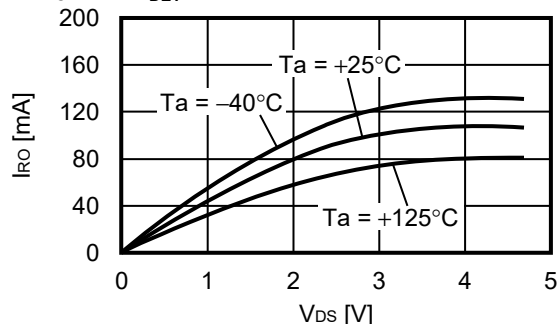


2.4 Reset output current vs. Output voltage

2.4.1 $-V_{DET} = 2.6\text{ V}$

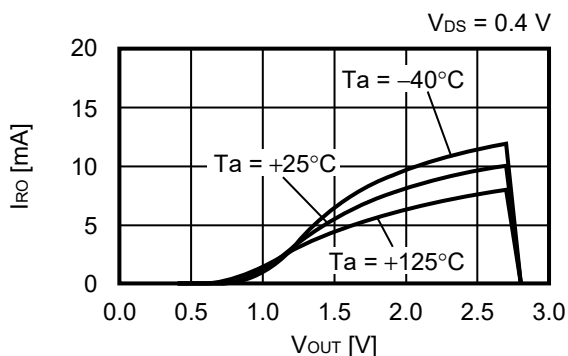


2.4.2 $-V_{DET} = 4.7\text{ V}$

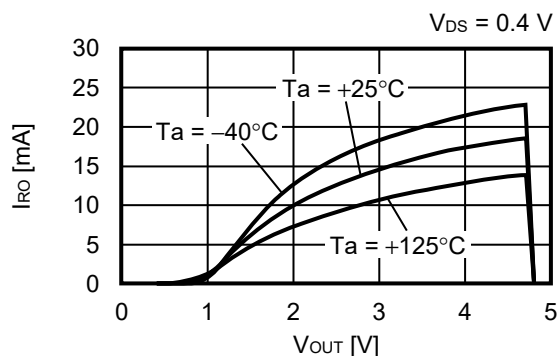


2.5 RO pin voltage vs. Output voltage

2.5.1 $-V_{DET} = 2.6\text{ V}$

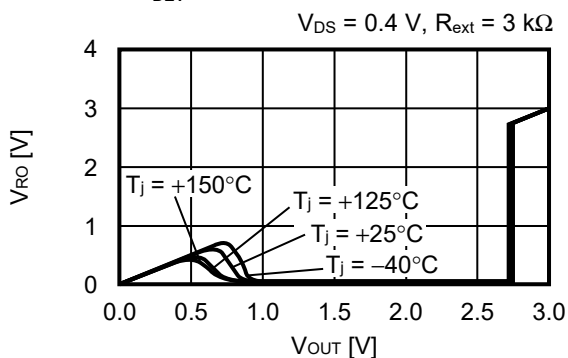


2.5.2 $-V_{DET} = 4.7\text{ V}$

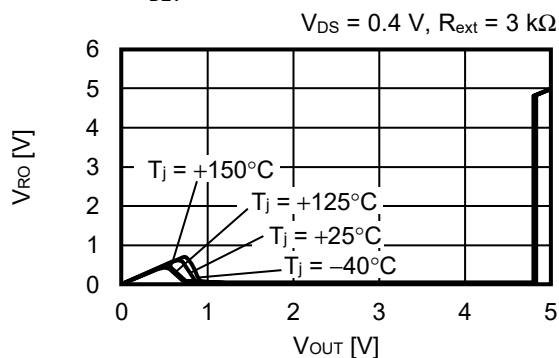


Remark I_{RO} : Nch transistor output current
 V_{RO} : Nch transistor output voltage
 V_{DS} : Drain-to-source voltage of Nch transistor

2. 6 Release delay time vs. Junction temperature

2. 6. 1 $-V_{DET} = 2.6 \text{ V}$

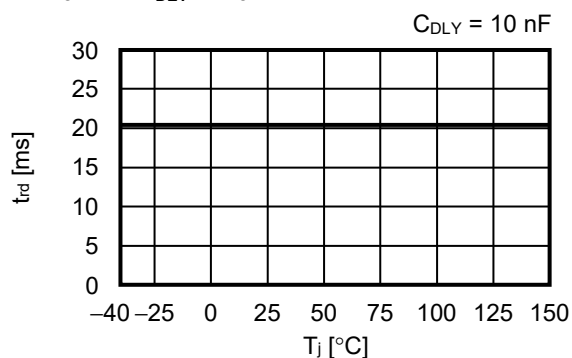


2. 6. 2 $-V_{DET} = 4.7 \text{ V}$

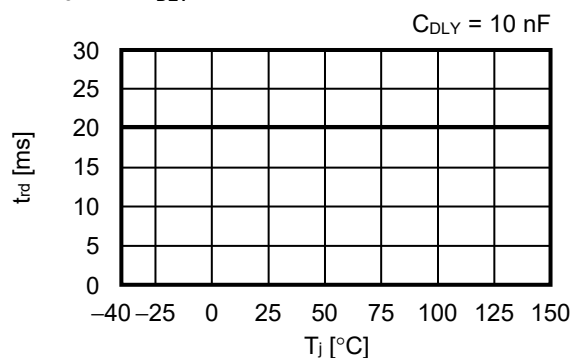


2. 7 Release delay time vs. Release delay time and monitoring time adjustment capacitance

2. 7. 1 $-V_{DET} = 2.6 \text{ V}$

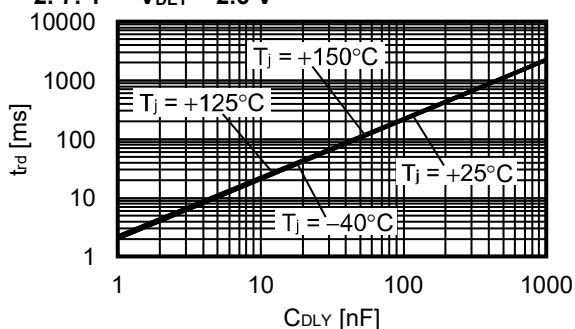


2. 7. 2 $-V_{DET} = 4.7 \text{ V}$

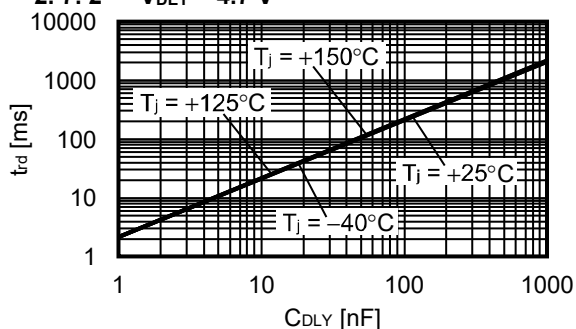


2. 8 Reset reaction time vs. Junction temperature

2. 8. 1 $-V_{DET} = 2.6 \text{ V}$

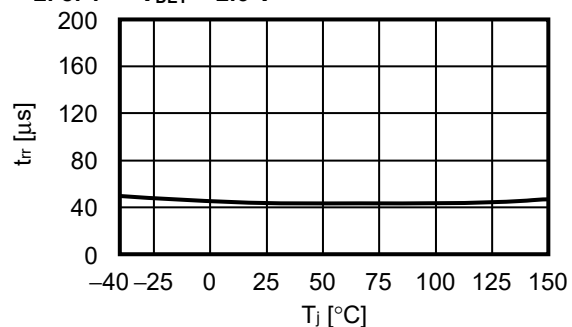


2. 8. 2 $-V_{DET} = 4.7 \text{ V}$

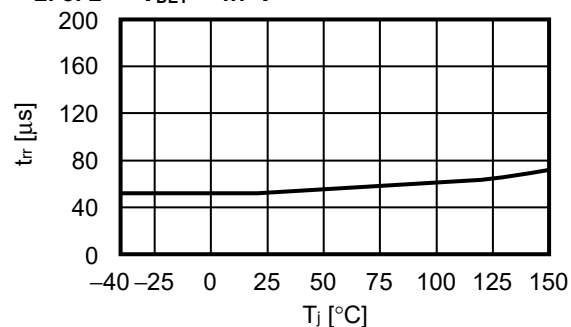


3. Watchdog timer block

3.1 Watchdog activation threshold current, watchdog deactivation threshold current vs. Junction temperature

3.1.1 $V_{OUT} = 3.3\text{ V}$

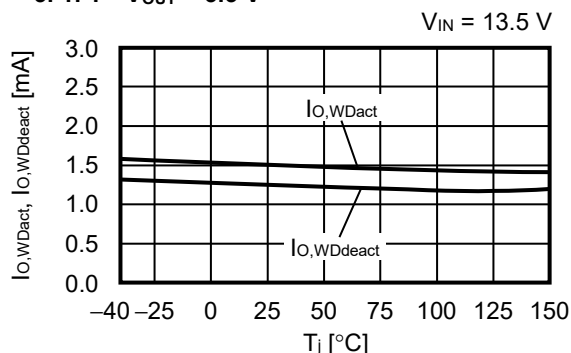


3.1.2 $V_{OUT} = 5.0\text{ V}$

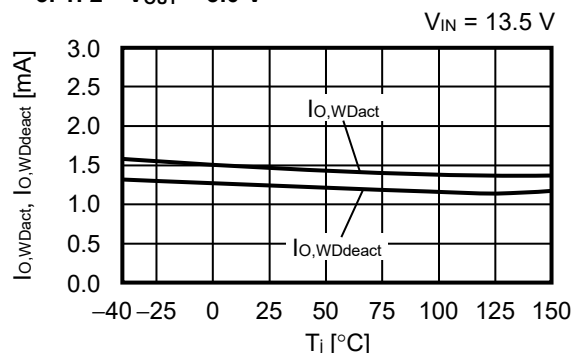


3.2 Watchdog activation threshold current, Watchdog deactivation threshold current vs. Watchdog activation threshold current adjustment resistance ($T_a = +25^\circ\text{C}$)

3.2.1 $V_{OUT} = 3.3\text{ V}$

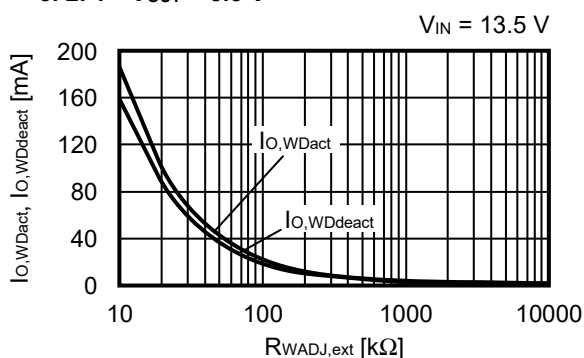


3.2.2 $V_{OUT} = 5.0\text{ V}$

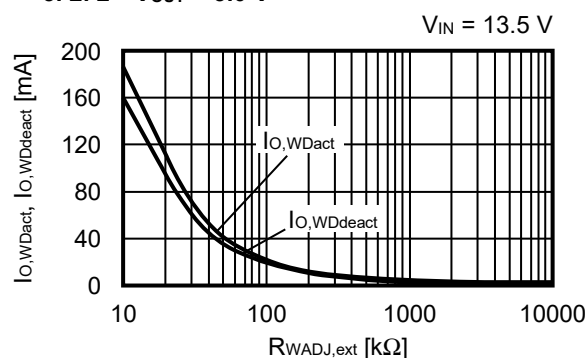


3.3 Watchdog trigger time vs. Junction temperature

3.3.1 $V_{OUT} = 3.3\text{ V}$

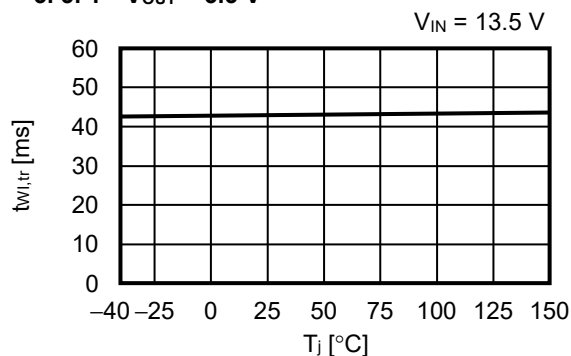


3.3.2 $V_{OUT} = 5.0\text{ V}$

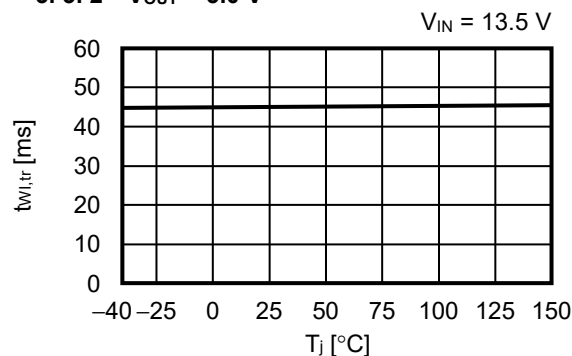


3.4 Watchdog trigger time vs. Release delay time and monitoring time adjustment capacitance

3.4.1 $V_{OUT} = 3.3\text{ V}$

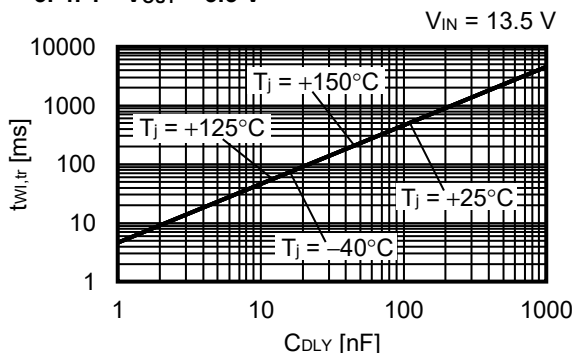

3.4.2 $V_{OUT} = 5.0\text{ V}$

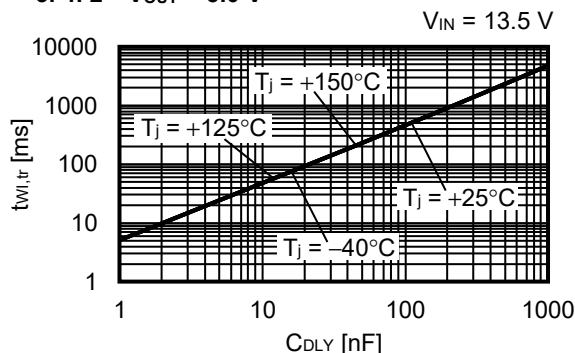


4. Overall

4.1 Current consumption during operation vs. Input voltage


4.1.1 $V_{OUT} = 3.3\text{ V}$, $-V_{DET} = 2.6\text{ V}$

When watchdog timer is deactivated

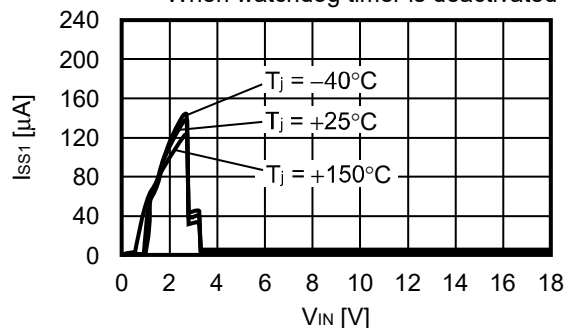

4.1.2 $V_{OUT} = 5.0\text{ V}$, $-V_{DET} = 4.7\text{ V}$


When watchdog timer is deactivated

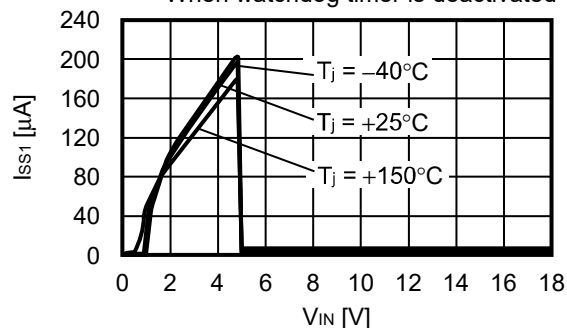

4.2 Current consumption during operation vs. Output current


4.2.1 $V_{OUT} = 3.3\text{ V}$, $-V_{DET} = 2.6\text{ V}$

$V_{IN} = 4.3\text{ V}$, WADJ pin is open

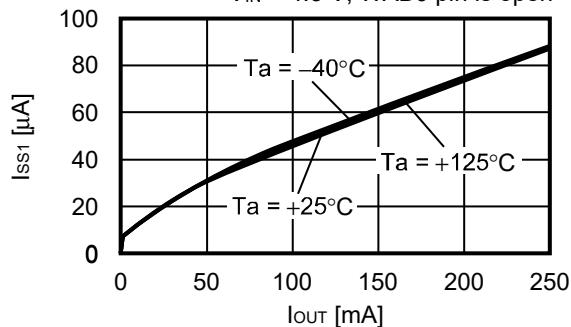

4.2.2 $V_{OUT} = 5.0\text{ V}$, $-V_{DET} = 4.7\text{ V}$


$V_{IN} = 6.0\text{ V}$, WADJ pin is open

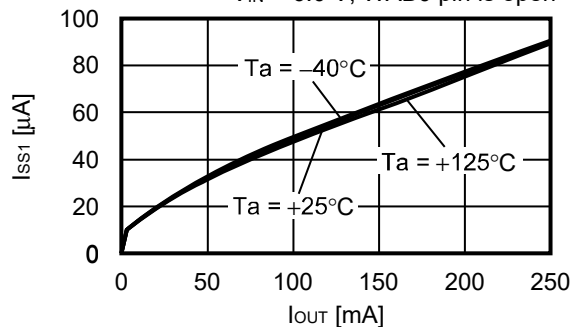

4.3 Current consumption during operation vs. Junction temperature


4.3.1 $V_{OUT} = 3.3\text{ V}$, $-V_{DET} = 2.6\text{ V}$

$V_{IN} = 13.5\text{ V}$, $I_{OUT} = 10\text{ μA}$

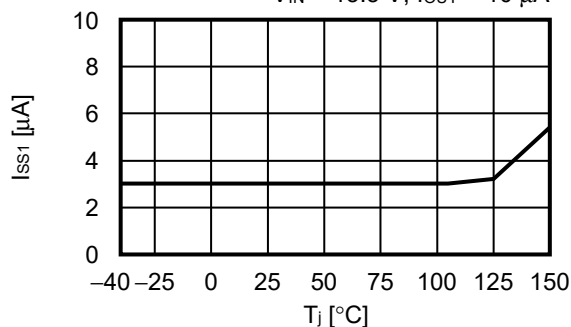

4.3.2 $V_{OUT} = 5.0\text{ V}$, $-V_{DET} = 4.7\text{ V}$

$V_{IN} = 13.5\text{ V}$, $I_{OUT} = 10\text{ μA}$

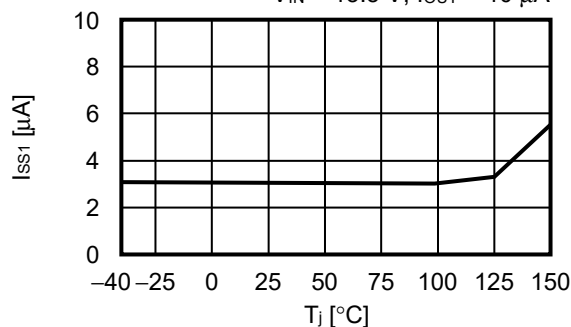


■ Reference Data

1. Characteristics of input transient response ($T_a = +25^\circ\text{C}$)


1.1 $V_{OUT} = 3.3\text{ V}$

$I_{OUT} = 0.1\text{ mA}$, $C_L = 1.0\text{ }\mu\text{F}$, $V_{IN} = 11.5\text{ V} \leftrightarrow 13.5\text{ V}$, $t_r = t_f = 5.0\text{ }\mu\text{s}$

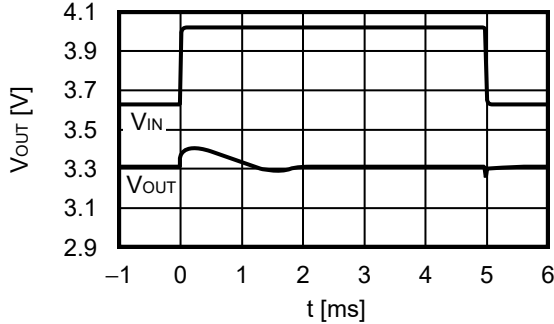


1.2 $V_{OUT} = 5.0\text{ V}$

$I_{OUT} = 0.1\text{ mA}$, $C_L = 1.0\text{ }\mu\text{F}$, $V_{IN} = 11.5\text{ V} \leftrightarrow 13.5\text{ V}$, $t_r = t_f = 5.0\text{ }\mu\text{s}$

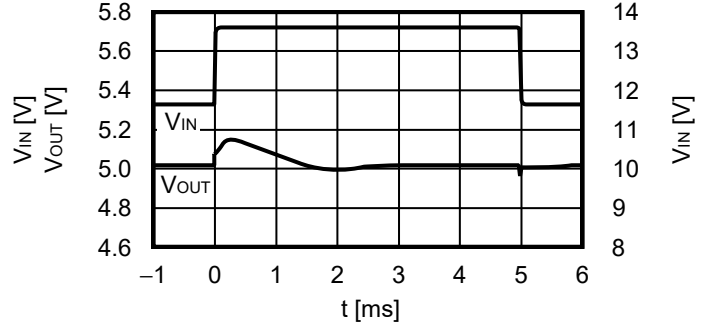


1.3 $V_{OUT} = 3.3\text{ V}$

$I_{OUT} = 250\text{ mA}$, $C_L = 1.0\text{ }\mu\text{F}$, $V_{IN} = 11.5\text{ V} \leftrightarrow 13.5\text{ V}$, $t_r = t_f = 5.0\text{ }\mu\text{s}$

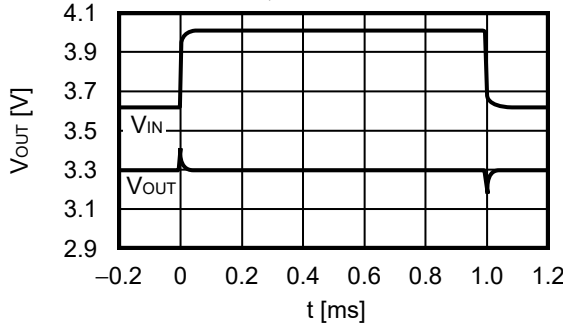

1.4 $V_{OUT} = 5.0\text{ V}$


$I_{OUT} = 250\text{ mA}$, $C_L = 1.0\text{ }\mu\text{F}$, $V_{IN} = 11.5\text{ V} \leftrightarrow 13.5\text{ V}$, $t_r = t_f = 5.0\text{ }\mu\text{s}$

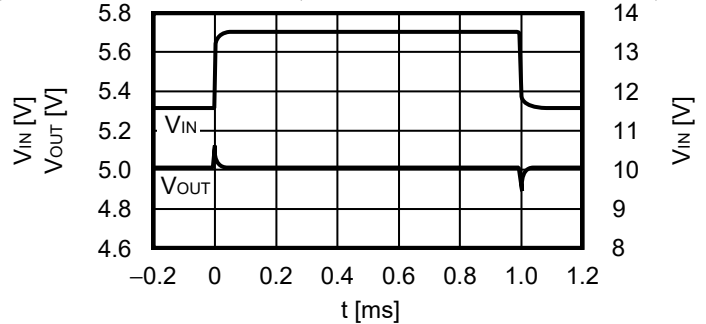

2. Characteristics of load transient response ($T_a = +25^\circ\text{C}$)


2.1 $V_{OUT} = 3.3\text{ V}$

$V_{IN} = 4.3\text{ V}$, $C_L = 1.0\text{ }\mu\text{F}$, $I_{OUT} = 50\text{ mA} \leftrightarrow 100\text{ mA}$, $t_r = t_f = 1.0\text{ }\mu\text{s}$

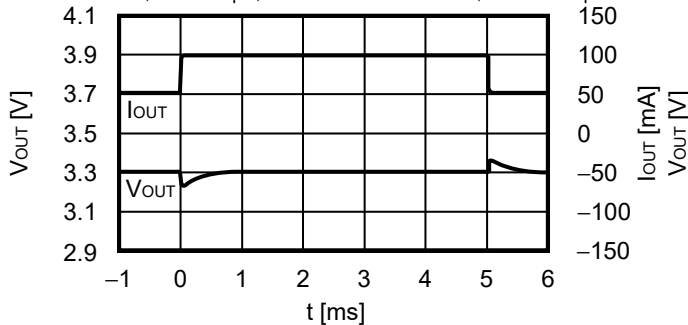


2.2 $V_{OUT} = 5.0\text{ V}$

$V_{IN} = 6.0\text{ V}$, $C_L = 1.0\text{ }\mu\text{F}$, $I_{OUT} = 50\text{ mA} \leftrightarrow 100\text{ mA}$, $t_r = t_f = 1.0\text{ }\mu\text{s}$

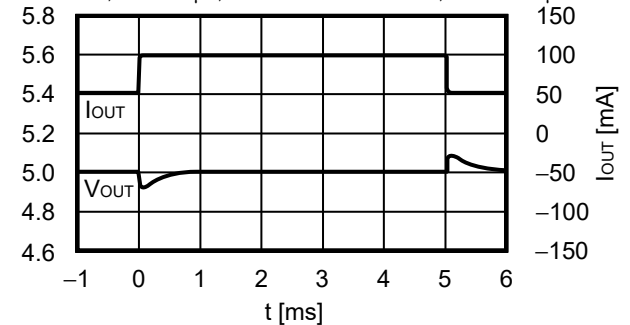


2.3 $V_{OUT} = 3.3\text{ V}$

$V_{IN} = 4.3\text{ V}$, $C_L = 1.0\text{ }\mu\text{F}$, $I_{OUT} = 1\text{ mA} \leftrightarrow 250\text{ mA}$, $t_r = t_f = 1.0\text{ }\mu\text{s}$

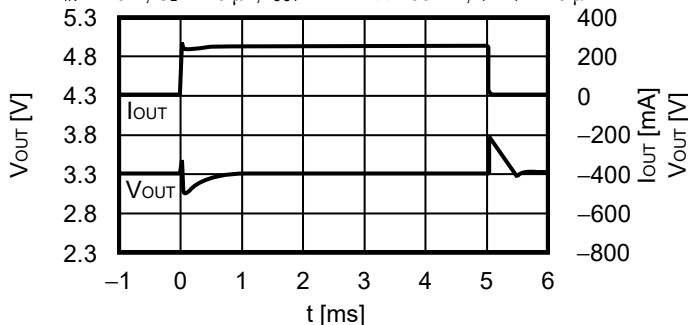

2.4 $V_{OUT} = 5.0\text{ V}$


$V_{IN} = 6.0\text{ V}$, $C_L = 1.0\text{ }\mu\text{F}$, $I_{OUT} = 1\text{ mA} \leftrightarrow 250\text{ mA}$, $t_r = t_f = 1.0\text{ }\mu\text{s}$

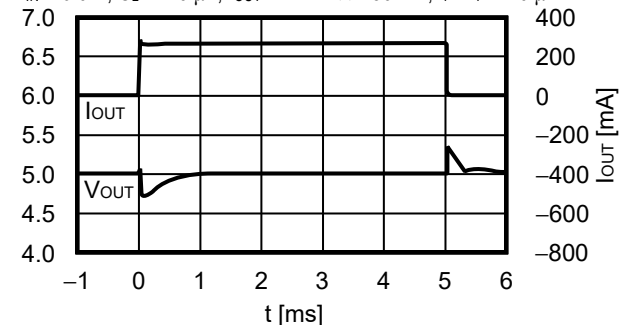

3. Load dump characteristics ($T_a = +25^\circ\text{C}$)

3.1 $V_{\text{OUT}} = 5.0\text{ V}$

$I_{\text{OUT}} = 0.1\text{ mA}$, $V_{\text{IN}} = 14.0\text{ V} \leftrightarrow 45.0\text{ V}$, $C_{\text{IN}} = C_{\text{L}} = 1.0\text{ }\mu\text{F}$

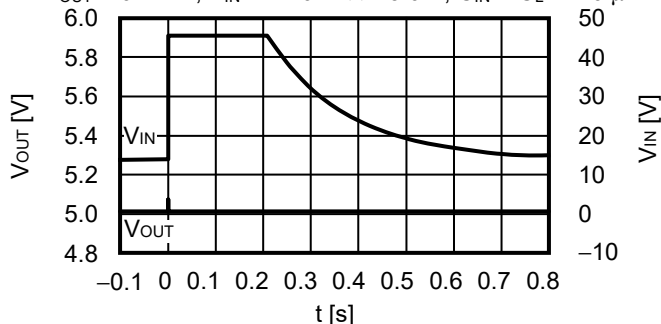

4. Example of equivalent series resistance vs. Output current characteristics ($T_a = -40^\circ\text{C}$ to $+125^\circ\text{C}$)

$C_{\text{IN}} = C_{\text{L}} = 1.0\text{ }\mu\text{F}$, $C_{\text{DLY}} = 10\text{ nF}$


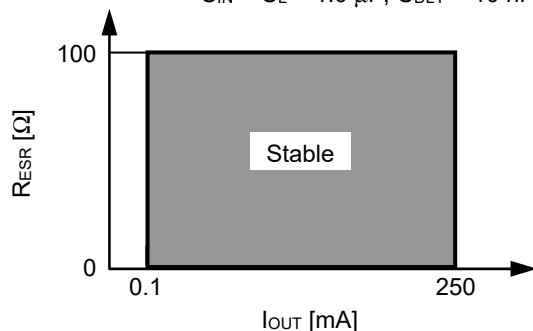


Figure 41

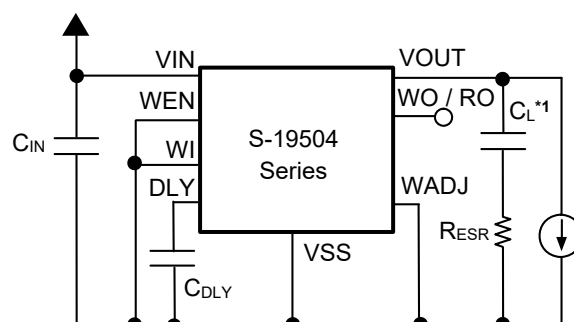


*1. C_{L} : TDK Corporation CGA5L3X8R1H105K (1.0 μF)

Figure 42


■ Power Dissipation

TO-252-9S

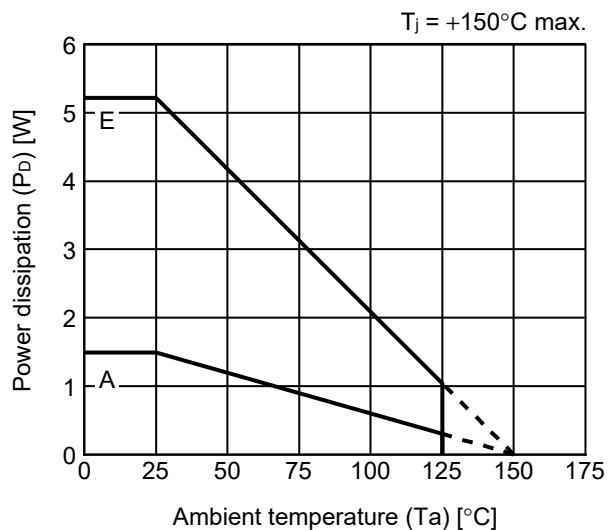

| Board | Power Dissipation (P_D)*1 |
|-------|-------------------------------|
| A | 1.49 W |
| B | — |
| C | — |
| D | — |
| E | 5.21 W |

HSOP-8A

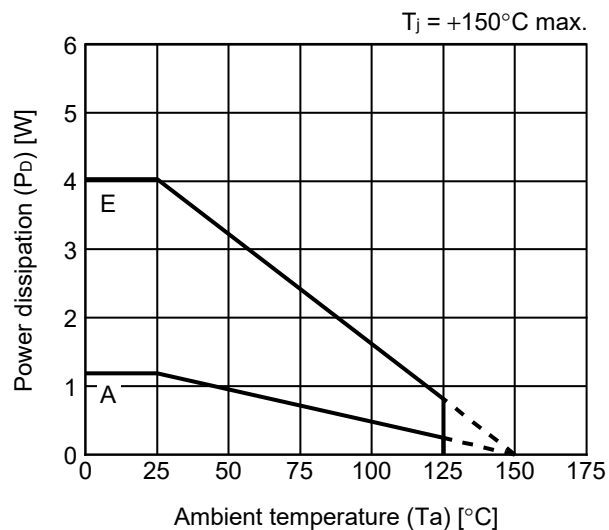


| Board | Power Dissipation (P_D)*1 |
|-------|-------------------------------|
| A | 1.19 W |
| B | — |
| C | — |
| D | — |
| E | 4.03 W |

*1. Measurement values when this IC is mounted on each board

TO-252-9S Test Board


(1) Board A



 IC Mount Area


| Item | | Specification |
|-----------------------------|---|---|
| Size [mm] | | 114.3 x 76.2 x t1.6 |
| Material | | FR-4 |
| Number of copper foil layer | | 2 |
| Copper foil layer [mm] | 1 | Land pattern and wiring for testing: t0.070 |
| | 2 | - |
| | 3 | - |
| | 4 | 74.2 x 74.2 x t0.070 |
| Thermal via | | - |

(2) Board B



| Item | | Specification |
|-----------------------------|---|---|
| Size [mm] | | 114.3 x 76.2 x t1.6 |
| Material | | FR-4 |
| Number of copper foil layer | | 4 |
| Copper foil layer [mm] | 1 | Land pattern and wiring for testing: t0.070 |
| | 2 | 74.2 x 74.2 x t0.035 |
| | 3 | 74.2 x 74.2 x t0.035 |
| | 4 | 74.2 x 74.2 x t0.070 |
| Thermal via | | - |

(3) Board C



| Item | | Specification |
|-----------------------------|---|---|
| Size [mm] | | 114.3 x 76.2 x t1.6 |
| Material | | FR-4 |
| Number of copper foil layer | | 4 |
| Copper foil layer [mm] | 1 | Land pattern and wiring for testing: t0.070 |
| | 2 | 74.2 x 74.2 x t0.035 |
| | 3 | 74.2 x 74.2 x t0.035 |
| | 4 | 74.2 x 74.2 x t0.070 |
| Thermal via | | Number: 4 Diameter: 0.3 mm |





enlarged view

No. TO252-9S-A-Board-SD-1.0

TO-252-9S Test Board


(4) Board D

 IC Mount Area



| Item | | Specification |
|-----------------------------|---|--|
| Size [mm] | | 114.3 x 76.2 x t1.6 |
| Material | | FR-4 |
| Number of copper foil layer | | 4 |
| Copper foil layer [mm] | 1 | Pattern for heat radiation: 2000mm ² t0.070 |
| | 2 | 74.2 x 74.2 x t0.035 |
| | 3 | 74.2 x 74.2 x t0.035 |
| | 4 | 74.2 x 74.2 x t0.070 |
| Thermal via | | - |

(5) Board E



| Item | | Specification |
|-----------------------------|---|--|
| Size [mm] | | 114.3 x 76.2 x t1.6 |
| Material | | FR-4 |
| Number of copper foil layer | | 4 |
| Copper foil layer [mm] | 1 | Pattern for heat radiation: 2000mm ² t0.070 |
| | 2 | 74.2 x 74.2 x t0.035 |
| | 3 | 74.2 x 74.2 x t0.035 |
| | 4 | 74.2 x 74.2 x t0.070 |
| Thermal via | | Number: 4 Diameter: 0.3 mm |




enlarged view

No. TO252-9S-A-Board-SD-1.0

HSOP-8A Test Board


(1) Board A

 IC Mount Area




| Item | | Specification |
|-----------------------------|---|---|
| Size [mm] | | 114.3 x 76.2 x t1.6 |
| Material | | FR-4 |
| Number of copper foil layer | | 2 |
| Copper foil layer [mm] | 1 | Land pattern and wiring for testing: t0.070 |
| | 2 | - |
| | 3 | - |
| | 4 | 74.2 x 74.2 x t0.070 |
| Thermal via | | - |

(2) Board B




| Item | | Specification |
|-----------------------------|---|---|
| Size [mm] | | 114.3 x 76.2 x t1.6 |
| Material | | FR-4 |
| Number of copper foil layer | | 4 |
| Copper foil layer [mm] | 1 | Land pattern and wiring for testing: t0.070 |
| | 2 | 74.2 x 74.2 x t0.035 |
| | 3 | 74.2 x 74.2 x t0.035 |
| | 4 | 74.2 x 74.2 x t0.070 |
| Thermal via | | - |

(3) Board C



| Item | | Specification |
|-----------------------------|---|---|
| Size [mm] | | 114.3 x 76.2 x t1.6 |
| Material | | FR-4 |
| Number of copper foil layer | | 4 |
| Copper foil layer [mm] | 1 | Land pattern and wiring for testing: t0.070 |
| | 2 | 74.2 x 74.2 x t0.035 |
| | 3 | 74.2 x 74.2 x t0.035 |
| | 4 | 74.2 x 74.2 x t0.070 |
| Thermal via | | Number: 4 Diameter: 0.3 mm |




enlarged view

No. HSOP8A-A-Board-SD-1.0

HSOP-8A Test Board


(4) Board D

 IC Mount Area



| Item | | Specification |
|-----------------------------|---|--|
| Size [mm] | | 114.3 x 76.2 x t1.6 |
| Material | | FR-4 |
| Number of copper foil layer | | 4 |
| Copper foil layer [mm] | 1 | Pattern for heat radiation: 2000mm ² t0.070 |
| | 2 | 74.2 x 74.2 x t0.035 |
| | 3 | 74.2 x 74.2 x t0.035 |
| | 4 | 74.2 x 74.2 x t0.070 |
| Thermal via | | - |

(5) Board E




| Item | | Specification |
|-----------------------------|---|--|
| Size [mm] | | 114.3 x 76.2 x t1.6 |
| Material | | FR-4 |
| Number of copper foil layer | | 4 |
| Copper foil layer [mm] | 1 | Pattern for heat radiation: 2000mm ² t0.070 |
| | 2 | 74.2 x 74.2 x t0.035 |
| | 3 | 74.2 x 74.2 x t0.035 |
| | 4 | 74.2 x 74.2 x t0.070 |
| Thermal via | | Number: 4 Diameter: 0.3 mm |






enlarged view

No. HSOP8A-A-Board-SD-1.0

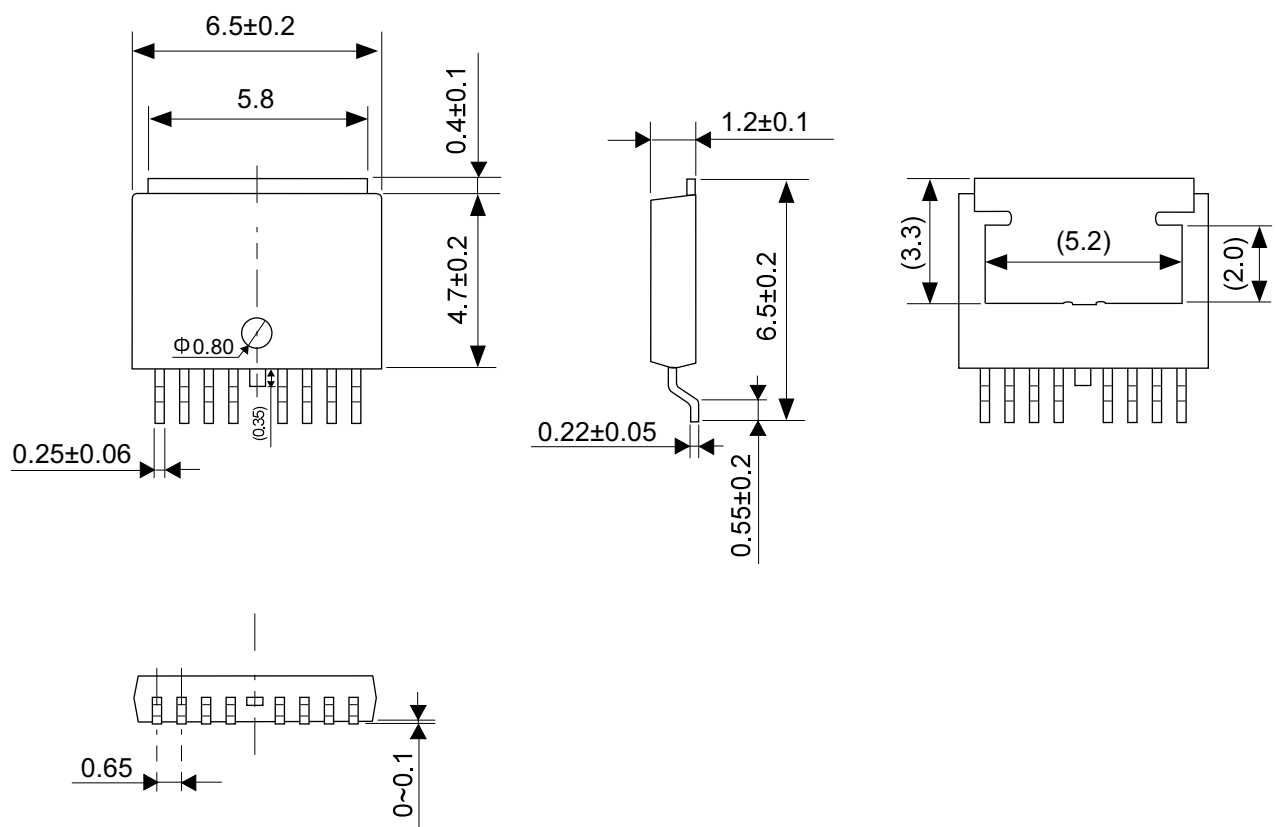


No. VA009-A-P-SD-2.0

| | |
|------------|---|
| TITLE | TO252-9S-A-PKG Dimensions |
| No. | VA009-A-P-SD-2.0 |
| ANGLE |  |
| UNIT | mm |
| | |
| ABLIC Inc. | |

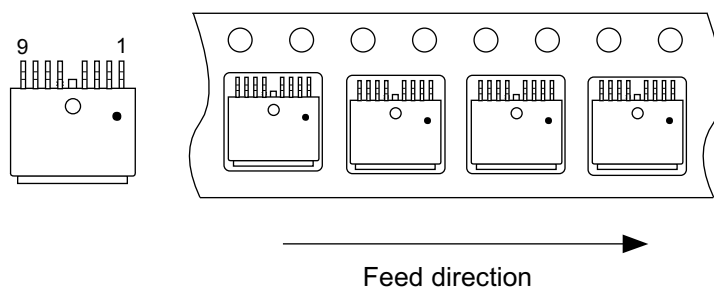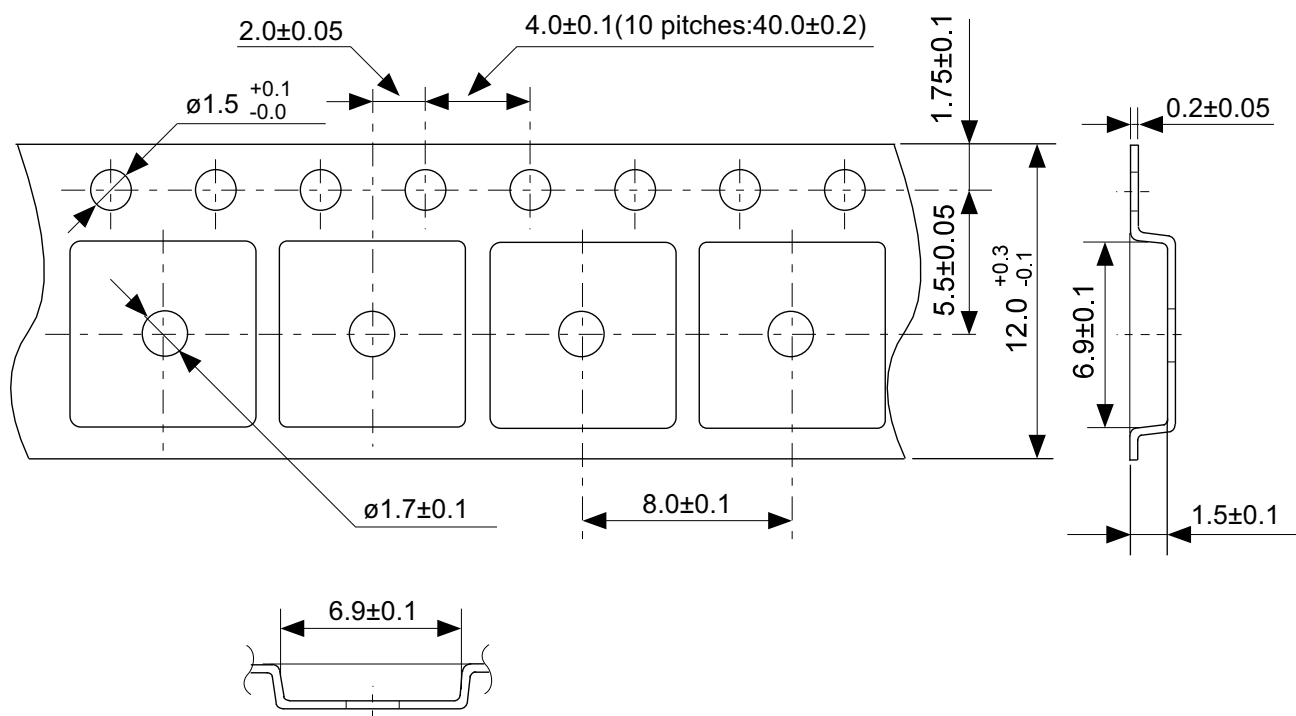


No. VA009-A-C-SD-1.0

| | |
|------------|-------------------------|
| TITLE | TO252-9S-A-Carrier Tape |
| No. | VA009-A-C-SD-1.0 |
| ANGLE | |
| UNIT | mm |
| | |
| ABLIC Inc. | |

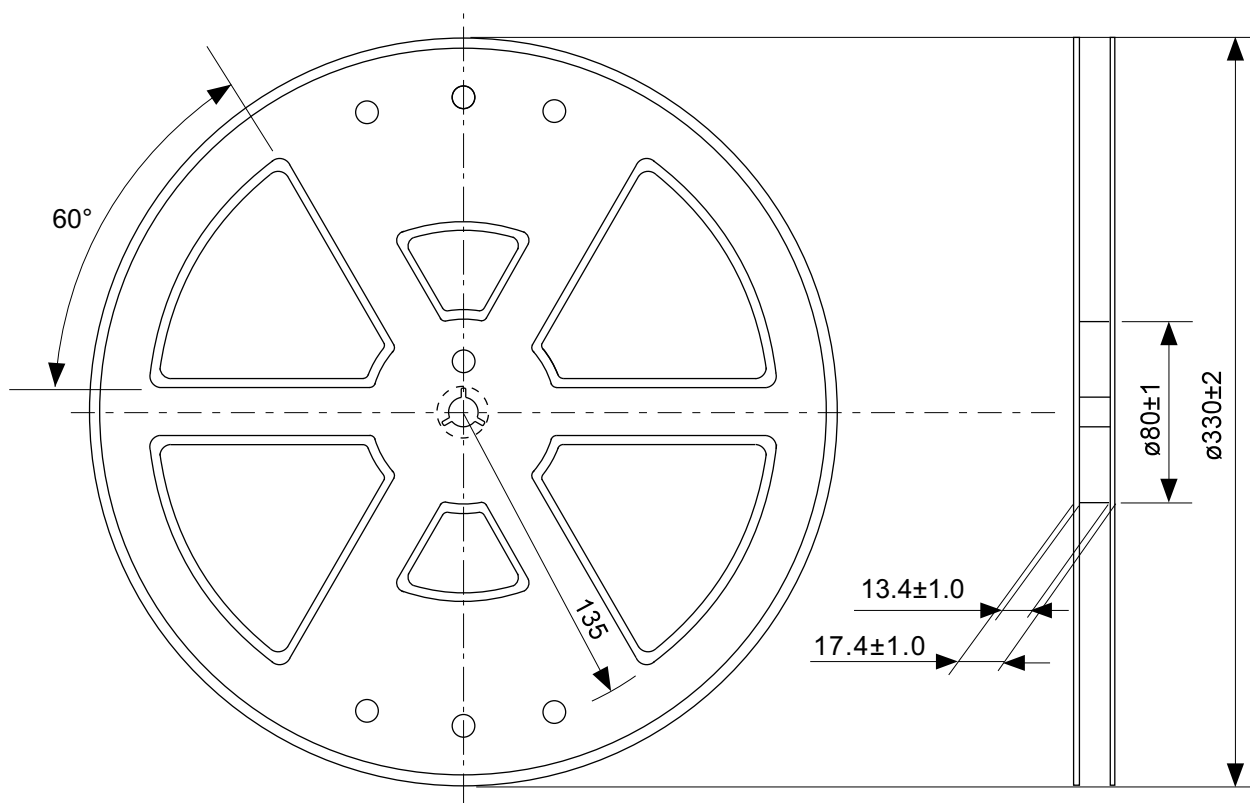


Enlarged drawing in the central part

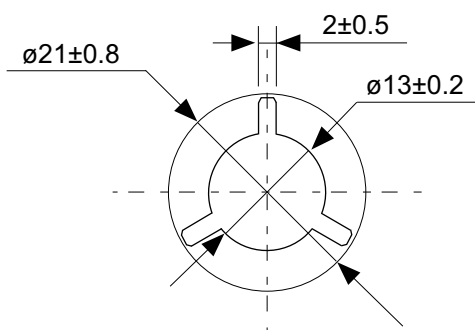


No. VA009-A-R-SD-1.1

| | | | |
|------------|------------------|------|-------|
| TITLE | TO252-9S-A-Reel | | |
| No. | VA009-A-R-SD-1.1 | | |
| ANGLE | | QTY. | 4,000 |
| UNIT | mm | | |
| | | | |
| ABLIC Inc. | | | |

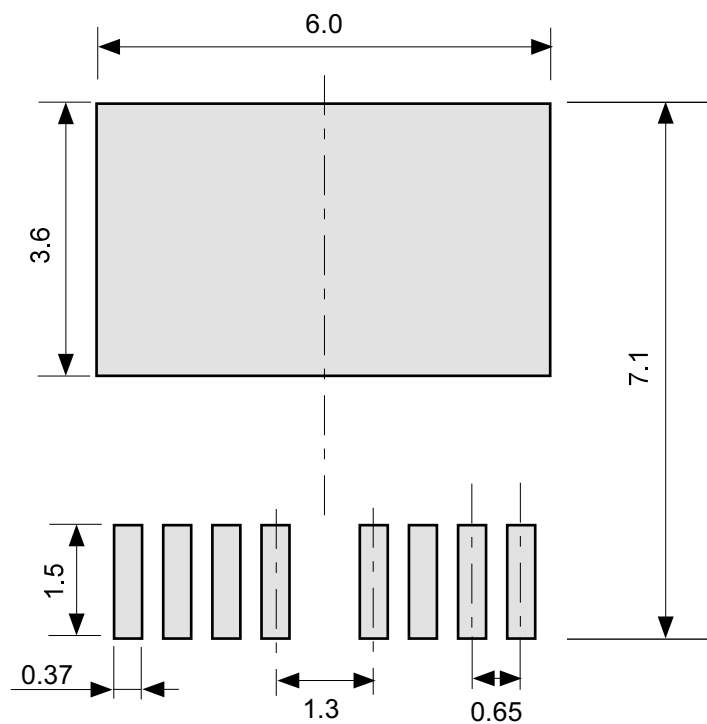




No. VA009-A-L-SD-1.0

| | |
|------------|------------------------------------|
| TITLE | TO252-9S-A -Land Recommendation |
| No. | VA009-A-L-SD-1.0 |
| ANGLE | |
| UNIT | mm |
| | |
| ABLIC Inc. | |

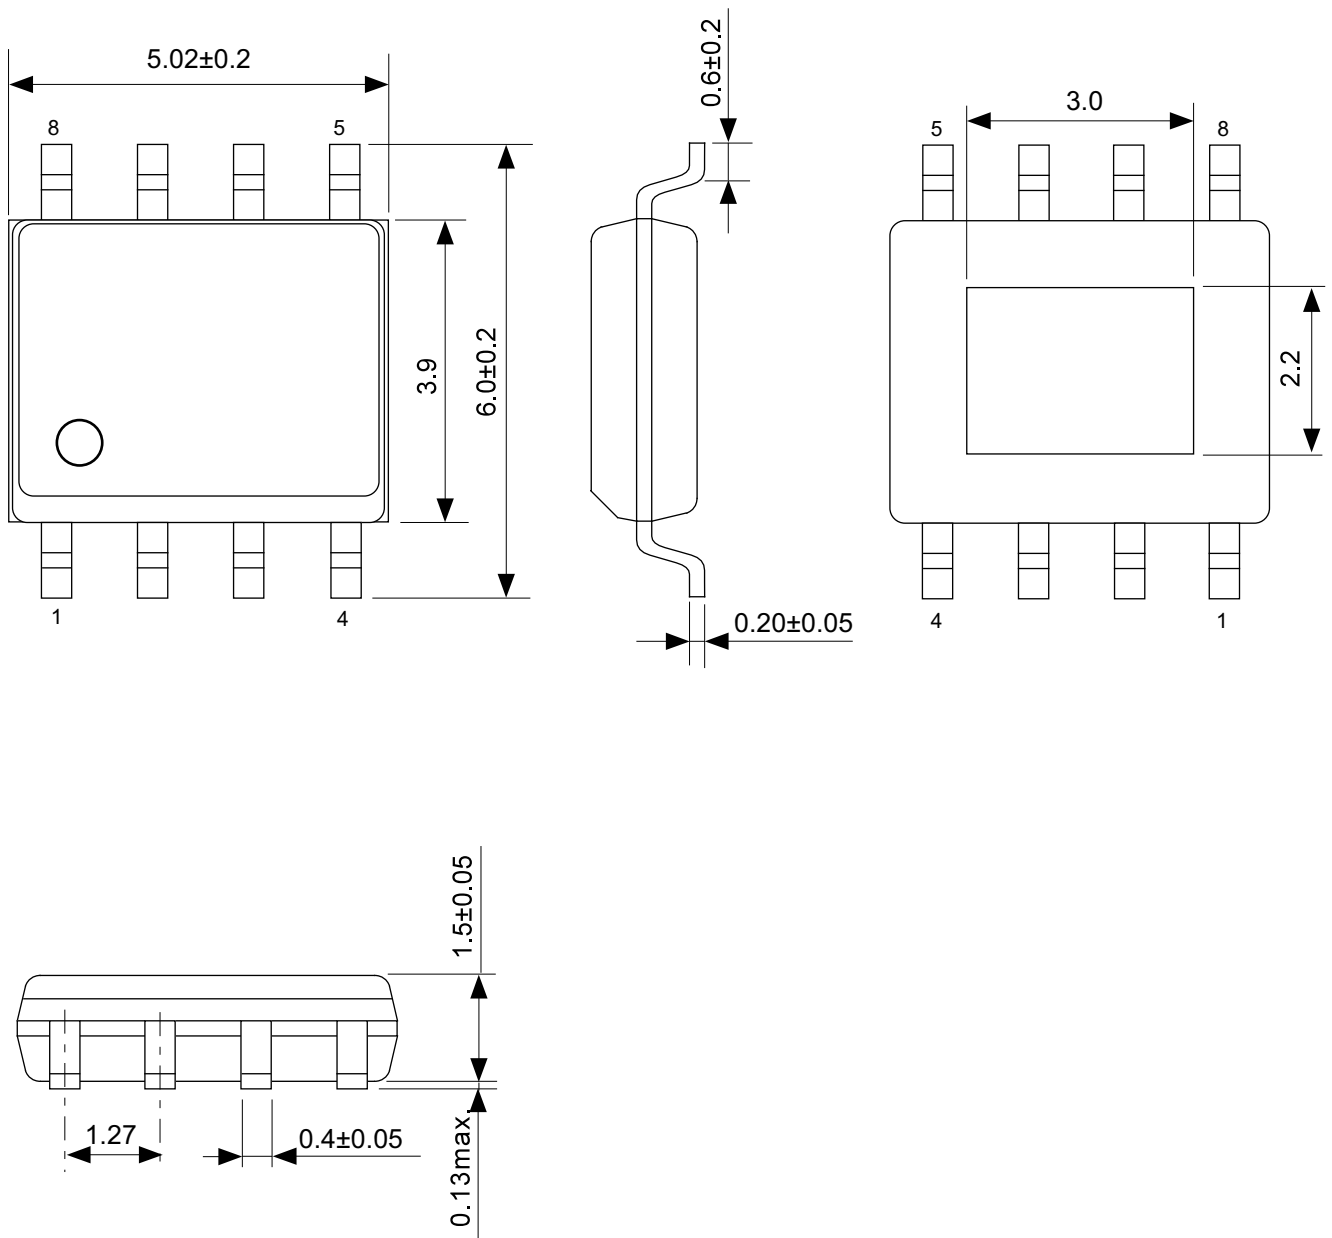


No. FH008-A-P-SD-2.0


| | |
|------------|---|
| TITLE | HSOP8A-A-PKG Dimensions |
| No. | FH008-A-P-SD-2.0 |
| ANGLE |  |
| UNIT | mm |
| | |
| ABLIC Inc. | |

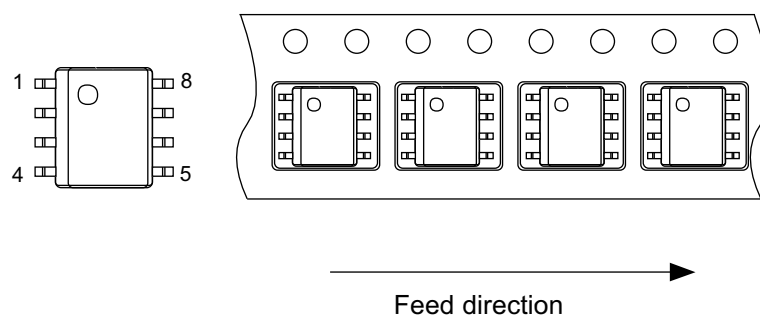

| | |
|---|-----------------------|
| TITLE | HSOP8A-A-Carrier Tape |
| No. | FH008-A-C-SD-1.0 |
| ANGLE | |
| UNIT | mm |
| | |
| <p align="center">ABLIC Inc.</p> | |

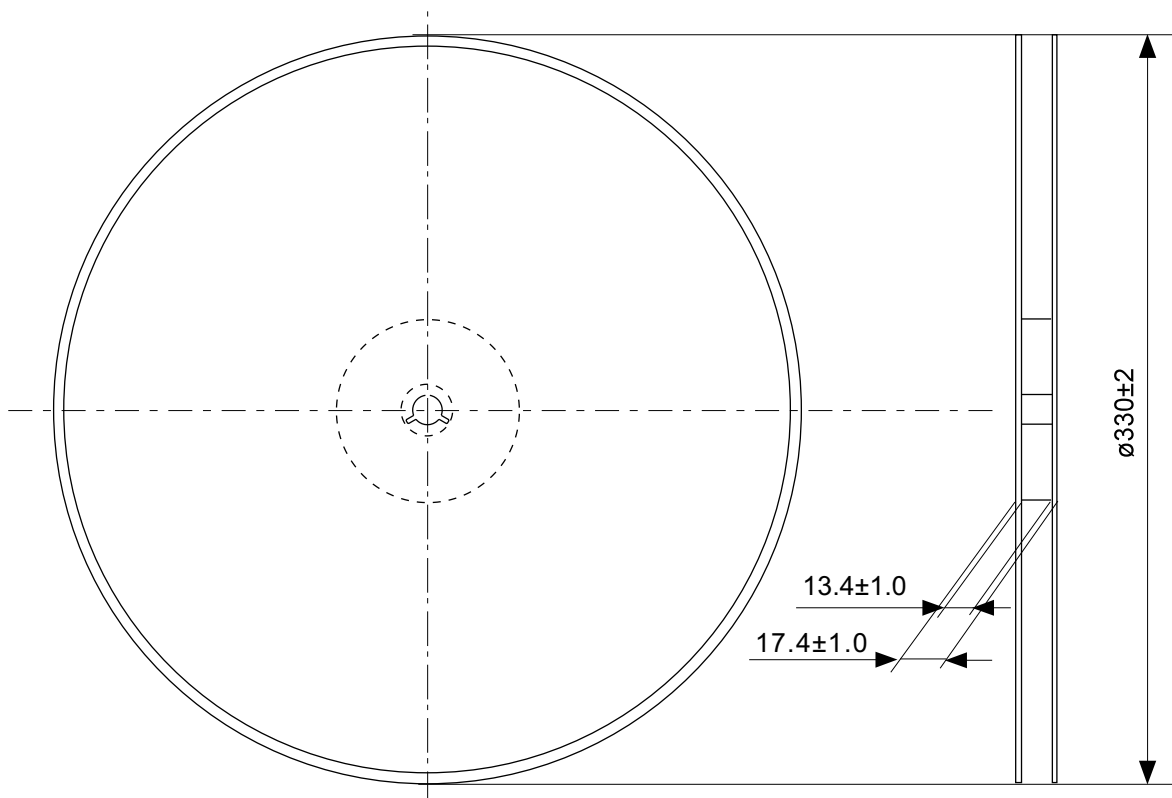


Enlarged drawing in the central part

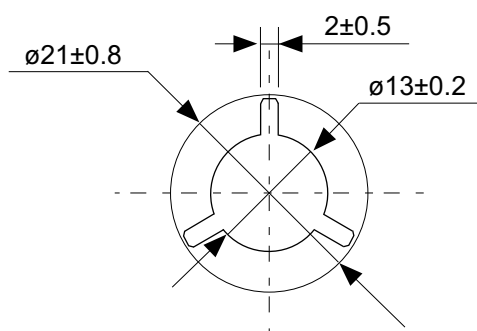

No. FH008-A-R-SD-1.1

| | | | |
|------------|------------------|------|-------|
| TITLE | HSOP8A-A-Reel | | |
| No. | FH008-A-R-SD-1.1 | | |
| ANGLE | | QTY. | 4,000 |
| UNIT | mm | | |
| | | | |
| ABLIC Inc. | | | |

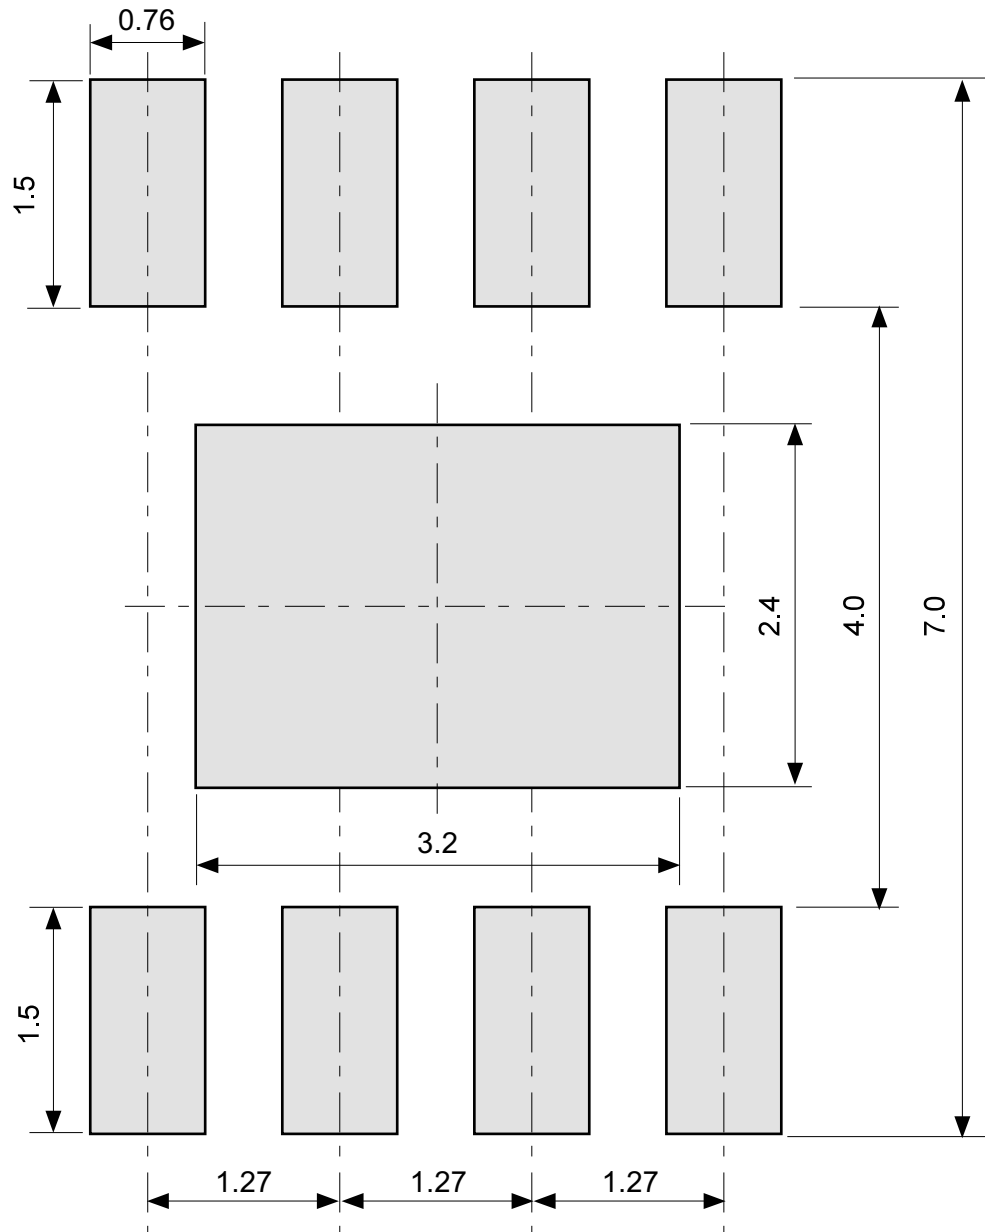

No. FH008-A-L-SD-1.0

| | |
|------------|----------------------------------|
| TITLE | HSOP8A-A -Land Recommendation |
| No. | FH008-A-L-SD-1.0 |
| ANGLE | |
| UNIT | mm |
| | |
| ABLIC Inc. | |

Disclaimers (Handling Precautions)

1. All the information described herein (product data, specifications, figures, tables, programs, algorithms and application circuit examples, etc.) is current as of publishing date of this document and is subject to change without notice.
2. The circuit examples and the usages described herein are for reference only, and do not guarantee the success of any specific mass-production design.
ABLIC Inc. is not liable for any losses, damages, claims or demands caused by the reasons other than the products described herein (hereinafter "the products") or infringement of third-party intellectual property right and any other right due to the use of the information described herein.
3. ABLIC Inc. is not liable for any losses, damages, claims or demands caused by the incorrect information described herein.
4. Be careful to use the products within their ranges described herein. Pay special attention for use to the absolute maximum ratings, operation voltage range and electrical characteristics, etc.
ABLIC Inc. is not liable for any losses, damages, claims or demands caused by failures and / or accidents, etc. due to the use of the products outside their specified ranges.
5. Before using the products, confirm their applications, and the laws and regulations of the region or country where they are used and verify suitability, safety and other factors for the intended use.
6. When exporting the products, comply with the Foreign Exchange and Foreign Trade Act and all other export-related laws, and follow the required procedures.
7. The products are strictly prohibited from using, providing or exporting for the purposes of the development of weapons of mass destruction or military use. ABLIC Inc. is not liable for any losses, damages, claims or demands caused by any provision or export to the person or entity who intends to develop, manufacture, use or store nuclear, biological or chemical weapons or missiles, or use any other military purposes.
8. The products are not designed to be used as part of any device or equipment that may affect the human body, human life, or assets (such as medical equipment, disaster prevention systems, security systems, combustion control systems, infrastructure control systems, vehicle equipment, traffic systems, in-vehicle equipment, aviation equipment, aerospace equipment, and nuclear-related equipment), excluding when specified for in-vehicle use or other uses by ABLIC, Inc. Do not apply the products to the above listed devices and equipments.
ABLIC Inc. is not liable for any losses, damages, claims or demands caused by unauthorized or unspecified use of the products.
9. In general, semiconductor products may fail or malfunction with some probability. The user of the products should therefore take responsibility to give thorough consideration to safety design including redundancy, fire spread prevention measures, and malfunction prevention to prevent accidents causing injury or death, fires and social damage, etc. that may ensue from the products' failure or malfunction.
The entire system in which the products are used must be sufficiently evaluated and judged whether the products are allowed to apply for the system on customer's own responsibility.
10. The products are not designed to be radiation-proof. The necessary radiation measures should be taken in the product design by the customer depending on the intended use.
11. The products do not affect human health under normal use. However, they contain chemical substances and heavy metals and should therefore not be put in the mouth. The fracture surfaces of wafers and chips may be sharp. Be careful when handling these with the bare hands to prevent injuries, etc.
12. When disposing of the products, comply with the laws and ordinances of the country or region where they are used.
13. The information described herein contains copyright information and know-how of ABLIC Inc. The information described herein does not convey any license under any intellectual property rights or any other rights belonging to ABLIC Inc. or a third party. Reproduction or copying of the information from this document or any part of this document described herein for the purpose of disclosing it to a third-party is strictly prohibited without the express permission of ABLIC Inc.
14. For more details on the information described herein or any other questions, please contact ABLIC Inc.'s sales representative.
15. This Disclaimers have been delivered in a text using the Japanese language, which text, despite any translations into the English language and the Chinese language, shall be controlling.

2.4-2019.07

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ABLIC:](#)

[S-19505AY3A-E8T1U4](#) [S-19504AFPA-V9T1U4](#) [S-19505AFPA-E8T1U4](#) [S-19504AFKA-E8T1U4](#) [S-19505AFPA-V9T1U4](#) [S-19504AFPA-E8T1U4](#) [S-19504AY3A-V9T1U4](#) [S-19505AY1A-V9T1U4](#) [S-19505AY2A-V9T1U4](#) [S-19505AY2A-E8T1U4](#) [S-19504AFKA-V9T1U4](#) [S-19505AFKA-E8T1U4](#) [S-19504AY2A-V9T1U4](#) [S-19504AY3A-E8T1U4](#) [S-19505AY1A-E8T1U4](#) [S-19505AY3A-V9T1U4](#) [S-19504AY1A-V9T1U4](#) [S-19504AY2A-E8T1U4](#) [S-19504AY1A-E8T1U4](#) [S-19505AFKA-V9T1U4](#)