




## Ultra Low Profile 0805 Power Divider 50Ω to 50Ω

### Description:

The PD1722J5050S2HF is a low profile, sub-miniature Wilkinson power divider in an easy to use surface mount package. The PD1722J5050S2HF is ideal for high volume manufacturing and delivers higher performances than traditional printed and lumped element solutions. The PD1722J5050S2HF is matched to 50 Ω and has a height profile of 0.5 mm which is ideal for high level integrations in the following markets: WCDMA, and GSM, The PD1722J5050S2HF does not include the resistive element and therefore, requires an external resistor for operation. The PD1722J5050S2HF is available on tape and reel for high volume manufacturing pick and place.

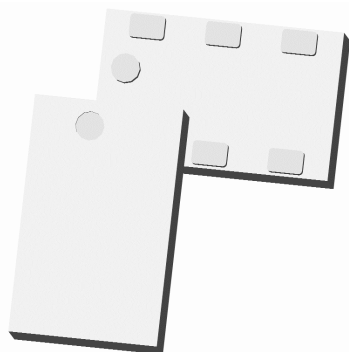

### Detailed Electrical Specifications:

Specifications subject to change without notice.

#### Features:

- 1700-2200 MHz
- 15 dB Isolation (output ports)
- 0.5mm Height Profile
- 50Ω Input / 50Ω Outputs
- Low Insertion Loss
- Surface Mountable
- Tape & Reel
- Non-conductive Surface
- RoHS Compliant
- External resistor required
- Halogen Free

#### Parameter


Frequency  
Input Port Impedance  
Output Port Impedance  
Return Loss  
Insertion Loss\*  
Amplitude Balance  
Phase Balance  
Isolation (Output Ports)  
Power Handling @85C  
Operating Temperature

#### ROOM (25°C)






Min.	Typ.	Max	Unit
1700		2200	MHz
	50		Ω
	50		Ω
10	13		dB
	0.6	0.8	dB
	0.1	0.3	dB
	1	3	Degrees
15	18		dB
		2	Watts
-55		+95	°C

\*Insertion Loss stated at room temperature (Insertion Loss is approximately 0.1 dB higher at +85 °C)


### Outline Drawing:

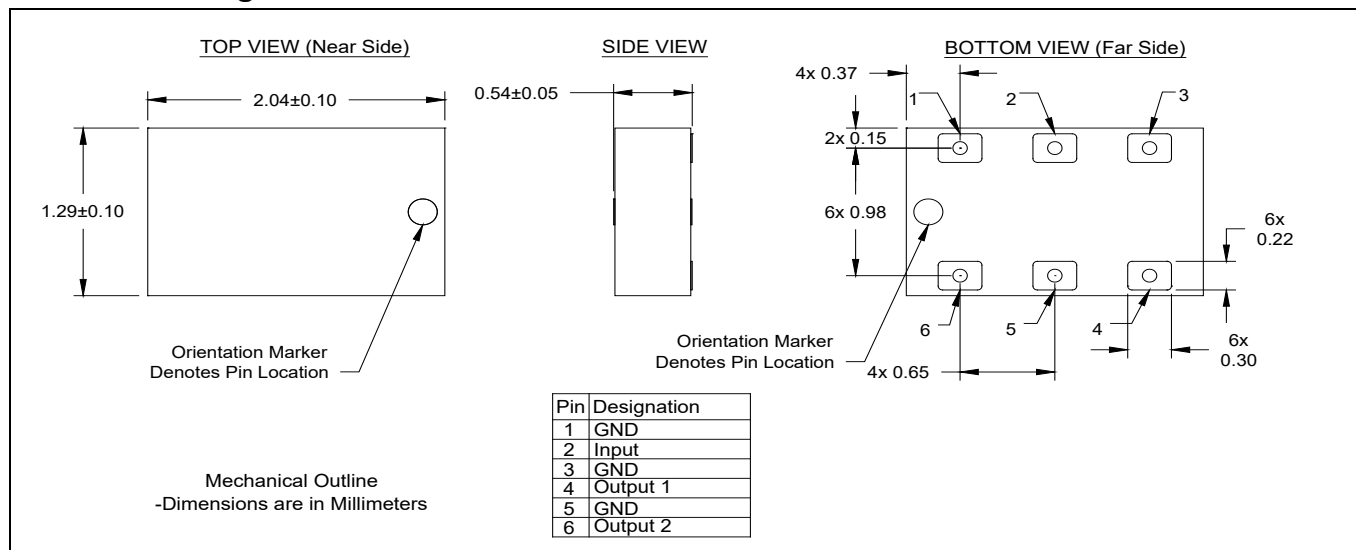

**Typical Performance: 500 MHz. to 6.0 GHz.**

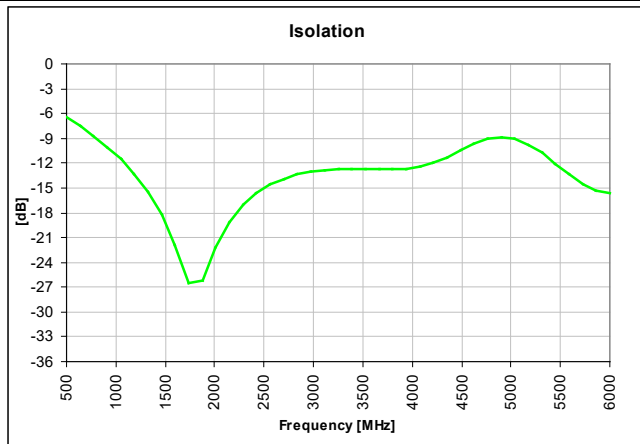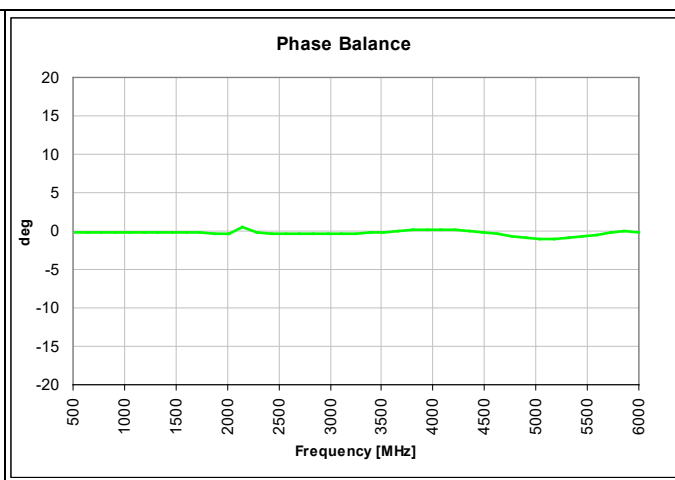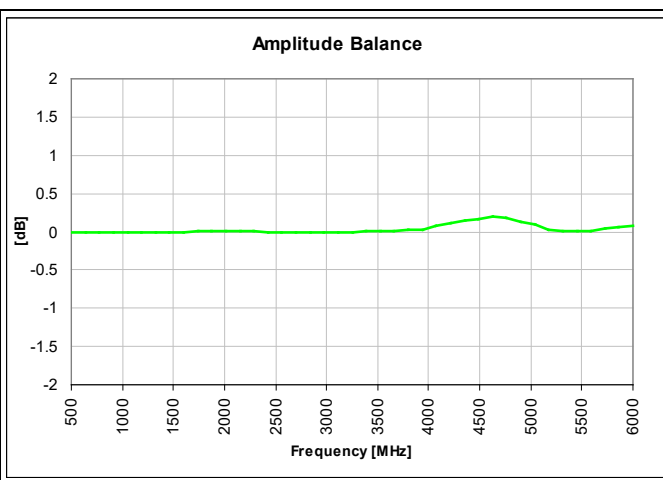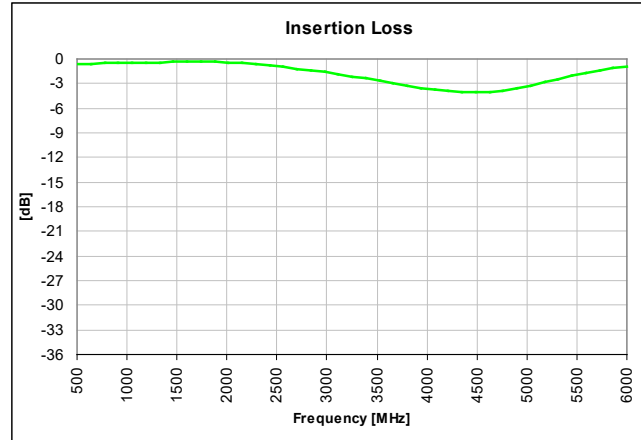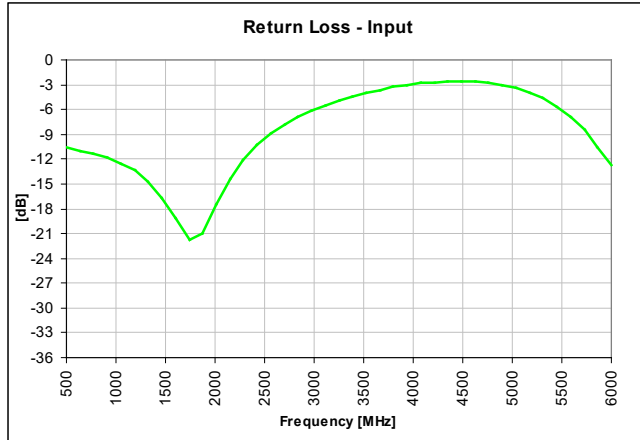

**Wide Band Performance: 1700 MHz. to 2200 MHz.**

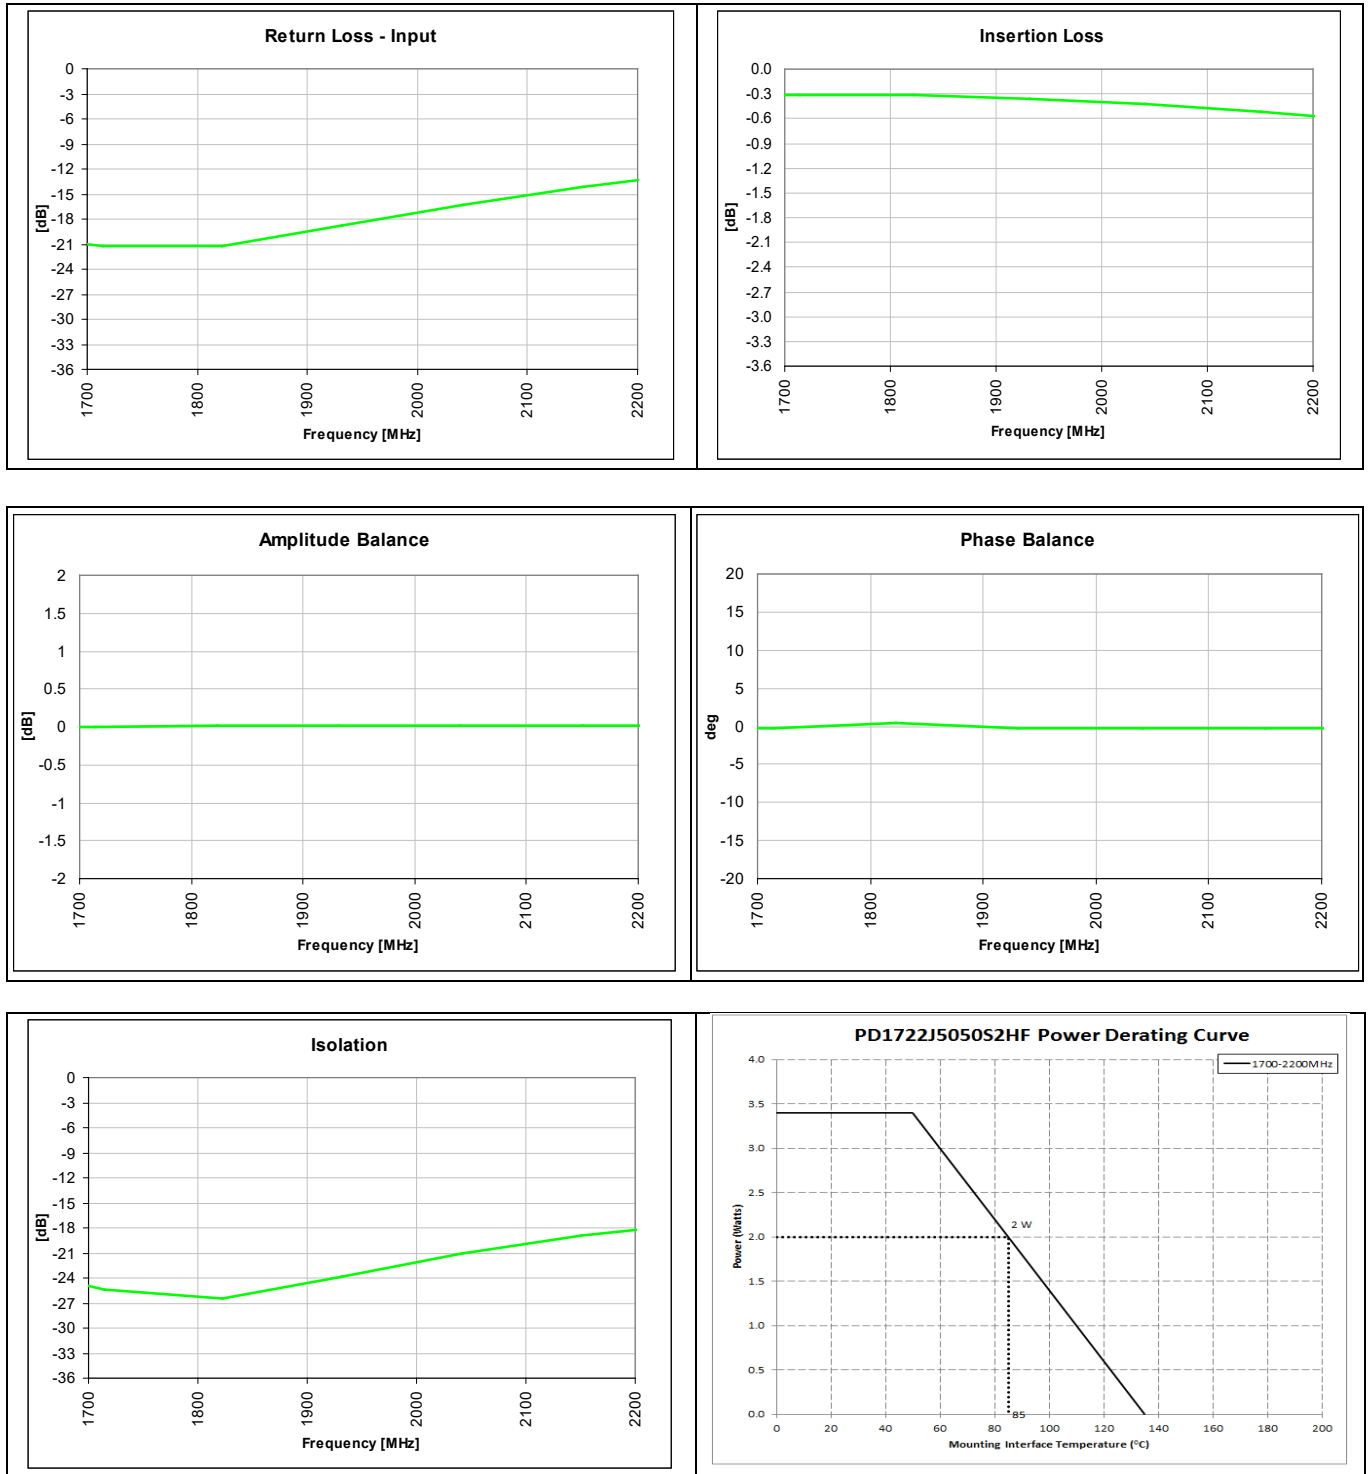


### Mounting Configuration:

In order for Xinger surface mount components to work optimally, the proper impedance transmission lines must be used to connect to the RF ports. If this condition is not satisfied, insertion loss, Isolation and VSWR may not meet published specifications.


An example of the PCB footprint used in the testing of these parts is shown below. In specific designs, the transmission line widths need to be adjusted to the unique dielectric coefficients and thicknesses as well as varying pick and place equipment tolerances. In addition, since the PD1722J5050S2HF is a Wilkinson power divider, an external 0603 100Ω resistor must be mounted in locations R1 as shown in the Figure below.

All of the Xinger components are constructed from ceramic filled PTFE composites which possess excellent electrical and mechanical stability.


#### Pad Footprint w/ 0603 Resistor Locations

 Circuit Pattern

 Footprint Pad (s)

 Solder Resist

Dimensions are in Millimeters  
Mounting Footprint

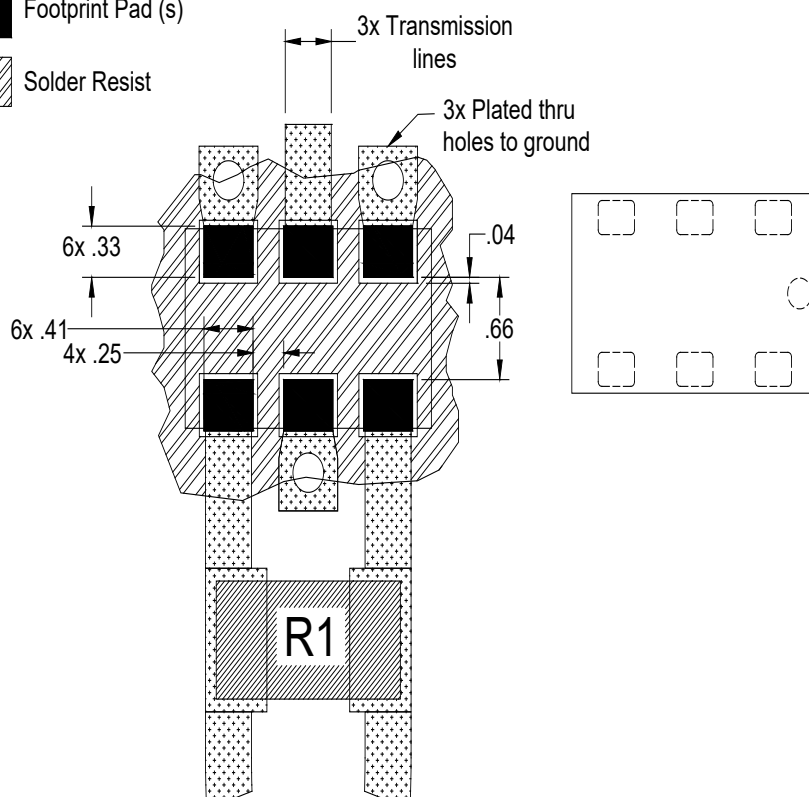

### Packaging and Ordering Information:

Parts are available in reel and are packaged per EIA 481-D. Parts are oriented in tape and reel as shown below. Minimum order quantities are 4000 per reel.

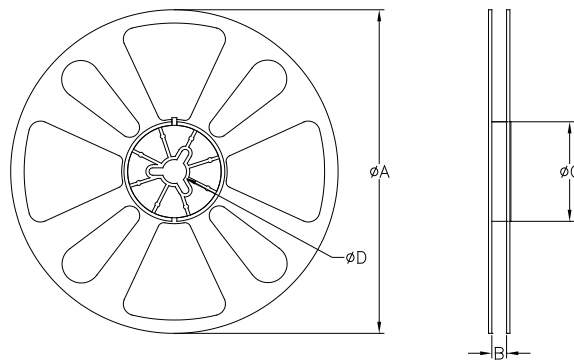
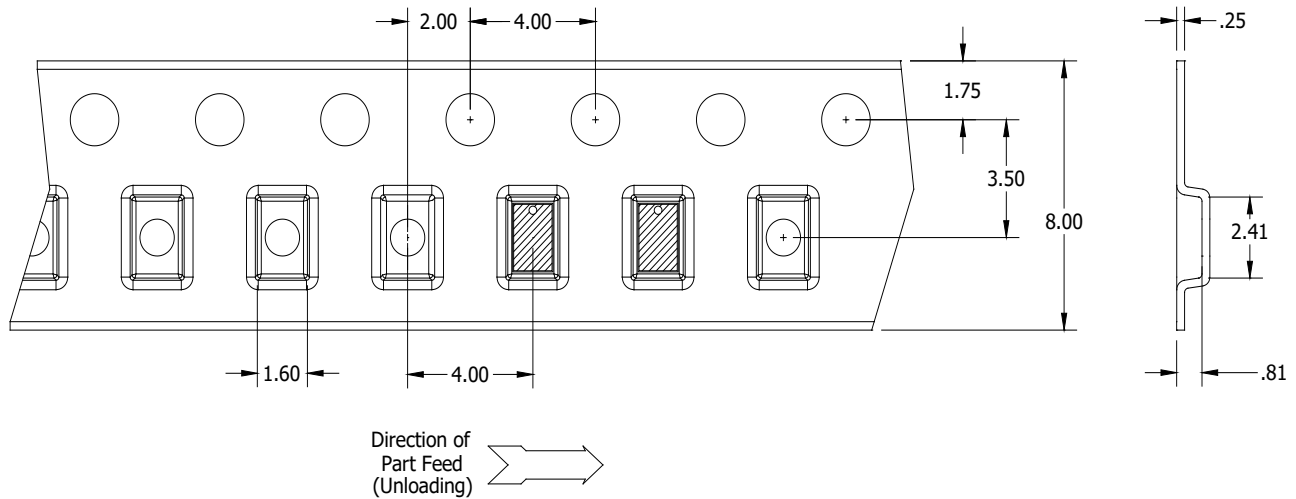


TABLE 1		
QUANTITY/REEL	REEL DIMENSIONS mm	
4000	$\phi A$	177.80
	B	8.00
	$\phi C$	50.80
	$\phi D$	13.00

Contact us:  
[rf&s\\_support@ttm.com](mailto:rf&s_support@ttm.com)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Anaren:

PD1722J5050S2HF