

## UWB 3 Click



PID: MIKROE-5898

**UWB 3 Click** is a compact add-on board that brings Ultra-Wideband communication to your application. This board features the [DWM3001](#), a fully integrated UWB transceiver module from [Qorvo](#). The module integrates the DW3110 IC, nRF52833 MCU, planar UWB antenna, accelerometer, power management, and crystal. It is a fully calibrated, tested, and validated design. This Click board™ makes the perfect solution for the development of precision real-time location systems (RTLS) using two-way ranging or TDoA schemes in various markets, location-aware wireless sensor networks (WSNs), and more.

UWB 3 Click is fully compatible with the mikroBUS™ socket and can be used on any host system supporting the [mikroBUS™](#) standard. It comes with the [mikroSDK](#) open-source libraries, offering unparalleled flexibility for evaluation and customization. What sets this Click board™ apart is the groundbreaking [ClickID](#) feature, enabling your host system to seamlessly and automatically detect and identify this add-on board.

### How does it work?

UWB 3 Click is based on the DWM3001, a fully integrated UWB transceiver module from Qorvo. This solution can be used to evaluate hardware performance as a TWR or TDoA Tag and build an evaluation real time location system (RTLS). It is designed to comply with the FiRa™ PHY and MAC specifications, enabling interoperability with other FiRa™-compliant devices. It supports channels 5 (6.5GHz) and 9 (8GHz) and data rates of 850Kbps up to 6.8Mbps with a maximum packet length of 1023 bytes for high data throughput applications. Besides the planar UWB printed antenna, there is also a Bluetooth chip antenna for an onboard Nordic Cortex-M4 32-bit MCU with 64MHz clock speed for utilizing a BLE radio transceiver. This Nordic MCU is the brain of the module. The nRF52833 has advanced on-chip interfaces, such as NFC-A

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.




ISO 27001: 2013 certification of informational security management system.  
 ISO 14001: 2015 certification of environmental management system.  
 OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

and USB 2.0 (full-speed 12Mbps), available on UWB 3 Click in a USB C form.

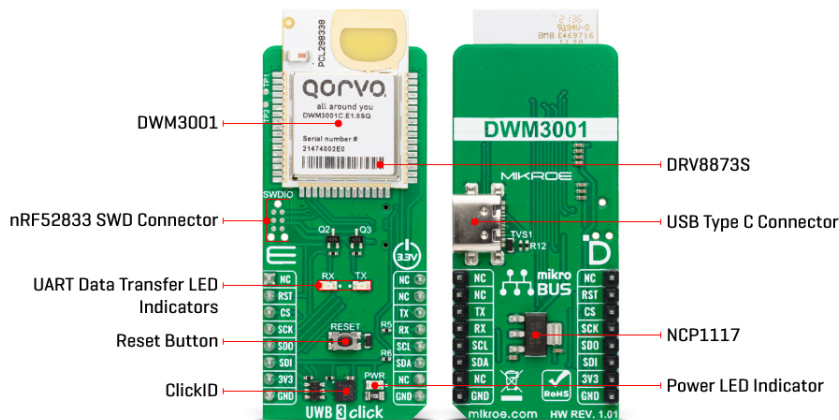

The DWM3001 UWB transceiver also incorporates the LIS12DH, a low-power three-axis linear accelerometer from STMicroelectronics. It is necessary as RTLS tags commonly use accelerometers to initiate UWB ranging only when a tag moves so that battery life can be extended by staying in the lowest power mode by default. Near-field communication type 2 (NFC-A) can be used by adding an NFC antenna to the TP1 and TP2 pads.

UWB 3 Click can use a standard 2-Wire UART interface of the nRF52833 to communicate with the host MCU with commonly used UART RX and TX pins and baud rates of 115200bps. There are RX and TX LEDs for visual presentation of data flow. It can also use a 4-Wire SPI serial interface on 32MHz for communication. The I2C interface, besides the communication with the Nordic MCU, allows you to read the data from the accelerometer. You can reset the module over the RST pin but also over the RESET button. The nRF52833 firmware can be updated over the SWDIO 6-pin needle connector.

**NOTE:** The current module firmware does not support the SPI and I2C serial interfaces; these interfaces are reserved for future use.

This Click board™ can be operated only with a 3.3V logic voltage level. The board must perform appropriate logic voltage level conversion before using MCUs with different logic levels. Also, this Click board™ comes equipped with a library containing easy-to-use functions and an example code that can be used as a reference for further development.

## Qorvo Nearby Interaction Software

The **Qorvo\_Nearby\_Interaction** Software Package provides developers with a comprehensive set of tools to evaluate and create applications that uses location, distance, and directional awareness relative to an iPhone equipped with U1 & U2 chips. This package includes **FiRa Compliant libraries**, sample applications, dedicated mobile applications, and extensive documentation to facilitate seamless development.

To begin development with Qorvo's Nearby Interaction Software, download the following applications from the **Apple App Store**:

- [Qorvo Nearby Interaction iOS App](#)
- [Qorvo NI Background iOS App](#)

Mikroe produces entire development toolchains for all major microcontroller architectures.  
Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.  
ISO 14001: 2015 certification of environmental management system.  
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).


Additionally, the [Qorvo\\_Nearby\\_Interaction\\_Software\\_Package](#) can be obtained by completing the provided form and accepting the software license agreement. Once submitted, you will receive a one-time download link via email for the requested software.

## Specifications

Applications	Can be used for the development of precision real-time location systems (RTLS) using two-way ranging or TDoA schemes in various markets, location-aware wireless sensor networks (WSNs), and more
On-board modules	DWM3001 - fully integrated UWB transceiver module from Qorvo
Key Features	Support IEEE 802.15.4 - 2015, and IEEE 802.15.4z BPRF, fully aligned with FiRaTM PHY, MAC, and certification development, supports channels 5 and 9, Bluetooth, AES-128/256 security block, low power consumption, and more
Interface	I2C,SPI,UART,USB
Feature	ClickID
Compatibility	mikroBUS™
Click board size	L (57.15 x 25.4 mm)
Input Voltage	3.3V

## Pinout diagram

This table shows how the pinout on UWB 3 Click corresponds to the pinout on the mikroBUS™ socket (the latter shown in the two middle columns).

Notes	Pin					Pin	Notes
	NC	1	AN	PWM	16	NC	
Reset / ID SEL	<b>RST</b>	2	RST	INT	15	NC	
SPI Select / ID COMM	<b>CS</b>	3	CS	RX	14	<b>TX</b>	UART TX
SPI Clock	<b>SCK</b>	4	SCK	TX	13	<b>RX</b>	UART RX
SPI Data OUT	<b>SDO</b>	5	MISO	SCL	12	<b>SCL</b>	I2C Clock
SPI Data IN	<b>SDI</b>	6	MOSI	SDA	11	<b>SDA</b>	I2C Data
Power Supply	<b>3.3V</b>	7	3.3V	5V	10	NC	
Ground	<b>GND</b>	8	GND	GND	9	<b>GND</b>	Ground

## Onboard settings and indicators

Label	Name	Default	Description
LD1	PWR	-	Power LED Indicator
LD2	RX	-	RX LED Indicator
LD3	TX	-	TX LED Indicator
T1	Reset	-	Reset Button

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.  
 ISO 14001: 2015 certification of environmental management system.  
 OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

## UWB 3 Click electrical specifications

Description	Min	Typ	Max	Unit
Supply Voltage	-	3.3	-	V
Operating Frequency	6250	-	8250	MHz
Channel Bandwidth	-	500	-	MHz
Data Rates	850	-	6800	Kbps

## Software Support

We provide a library for the UWB 3 Click as well as a demo application (example), developed using MIKROE [compilers](#). The demo can run on all the main MIKROE [development boards](#).

Package can be downloaded/installed directly from NECTO Studio Package Manager (recommended), downloaded from our [LibStock™](#) or found on [Mikroe github account](#).

## Library Description

This library contains API for UWB 3 Click driver.

Key functions

- `uwb3_send_cmd` This function sends a specified command to the click module.
- `uwb3_send_cmd_with_parameter` This function sends a command with specified parameter to the click module.
- `uwb3_reset_device` This function resets the device by toggling the RST pin state.

## Example Description

This example demonstrates the use of an UWB 3 Click board™ by showing the communication between the two click boards.

The full application code, and ready to use projects can be installed directly from NECTO Studio Package Manager (recommended), downloaded from our [LibStock™](#) or found on [Mikroe github account](#).

Other Mikroe Libraries used in the example:

- MikroSDK.Board
- MikroSDK.Log
- Click.UWB3

## Additional notes and informations

Depending on the development board you are using, you may need [USB UART click](#), [USB UART 2 Click](#) or [RS232 Click](#) to connect to your PC, for development systems with no UART to USB interface available on the board. UART terminal is available in all MIKROE [compilers](#).

## mikroSDK

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.  
 ISO 14001: 2015 certification of environmental management system.  
 OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

This Click board™ is supported with [mikroSDK](#) - MIKROE Software Development Kit. To ensure proper operation of mikroSDK compliant Click board™ demo applications, mikroSDK should be downloaded from the [LibStock](#) and installed for the compiler you are using.

For more information about mikroSDK, visit the [official page](#).

## Resources

[mikroBUS™](#)

[mikroSDK](#)

[Click board™ Catalog](#)

[ClickID](#)

## Downloads

[NCP1117 datasheet](#)

[UWB 3 click example on Libstock](#)

[UWB 3 click schematic](#)

[UWB 3 click 2D and 3D files](#)

[DWM3001C datasheet](#)

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.  
ISO 14001: 2015 certification of environmental management system.  
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mikroe:](#)

[MIKROE-5898](#)