

# SIL40C Series

12 Vin single output

**NEW Product**



- **40 A current rating**
- **Input voltage range: 10.2 Vdc to 13.8 Vdc**
- **Output voltage range: 0.9 Vdc to 5.0 Vdc**
- **Industry leading value**
  - Cost optimized design
- **Excellent transient response**
- **Output Voltage adjustability**
  - Pathway for future upgrades
  - Supports silicon voltage migration
  - Resulting in reduced design-in and qualification time
- **Designed in reliability: MTBF of >4 million hours per Telcordia SR-332**
- **Current share**
- **Available RoHS compliant**



The SIL40C Series is a new high density open frame non-isolated converter for space-sensitive applications. Each model has a wide input range (10.2 Vdc to 13.8 Vdc) and offer a wide 0.9 Vdc to 5.0 Vdc output voltage range with a 40 A load. An external resistor adjusts the output voltage from its pre-set value of 0.9 V to any value up to 5 V. Typical efficiencies are 92% at full load conditions. The SIL40C series offers remote ON/OFF and overcurrent protection as standard. With full international safety approval including EN60950 and UL/cUL60950, the SIL40C reduces compliance costs and time to market.



All specifications are typical at nominal input, full load at 25 °C unless otherwise stated

## SPECIFICATIONS

### OUTPUT SPECIFICATIONS

Voltage adjustability	(See Note 5)	0.9-5.0 Vdc
Output setpoint accuracy	1.0% trim resistors	±3.0%
Line regulation	Low line to high line	±0.2% max.
Load regulation	Full load to min. load	±1.5% max.
Min/max load		0 A/40 A
Overshoot	At turn-on	1.0% max.
Undershoot	At turn-off	100 mV max.
Ripple and noise	(See Note 1)	50 mV pk-pk 15 mV rms
Transient response	Deviation	75 mV 50 µs recovery to within regulation band

### INPUT SPECIFICATIONS

Input voltage range		10.2-13.8 Vdc
Input current	Minimum load Remote OFF	290 mA 30 mA
Input current (max.)		22 A max @ I <sub>o</sub> max and V <sub>in</sub> = 10.2 V
Input reflected ripple	(See Note 4)	150 mA pk-pk
Remote ON/OFF Logic compatibility		Active high ON >2.4 Vdc OFF <0.8 Vdc
Start-up time	Power up Remote ON/OFF	<30 ms <30 ms
Turn ON threshold		9.0 Vdc
Turn OFF threshold		7.6 Vdc

### GENERAL SPECIFICATIONS

Efficiency		See table
Switching frequency	Fixed	300 kHz typ.
Approvals and standards	(See Note 7)	TÜV Product Services IEC60950, UL/cUL60950
Material flammability		UL94V-0
Weight		28.3 g (1.0 oz)
MTBF	Telcordia SR-332, method II @ 40 °C	4,585,991 hours

### ENVIRONMENTAL SPECIFICATIONS

Thermal performance	Operating ambient, temperature	0 °C to +80 °C
(See Note 10)	Non-operating	-40 °C to +125 °C

### PROTECTION

Short-circuit	Foldback, non-latching
Overtemperature	Hiccup, non-latching

### RECOMMENDED SYSTEM CAPACITANCE

Input capacitance	(See Note 11)	2 x 270 µF/20 mΩ esr max.
Output capacitance	(See Note 11)	3 x 680 µF/10 mΩ esr max.

### International Safety Standard Approvals



UL/cUL CAN/CSA 22.2 No. E139421  
UL60950 file No. E139421

TÜV Product Service (EN60950) Certificate No. B 03 08 19870 219  
CB report and certificate to IEC60950

# SIL40C Series

12 Vin single output

DC-DC CONVERTERS

C Class Non-isolated


2

For the most current data and application support visit [www.artesyn.com/powergroup/products.htm](http://www.artesyn.com/powergroup/products.htm)

**NEW Product**

OUTPUT POWER (MAX.)	INPUT VOLTAGE	OVP	OUTPUT VOLTAGE <sup>(12)</sup>	OUTPUT CURRENT (MIN.)	OUTPUT CURRENT (MAX.)	EFFICIENCY	REGULATION		MODEL NUMBER <sup>(8,13,14,15)</sup>
							LINE	LOAD	
200 W	10.2-13.8 Vdc	N/A	0.9-5.0 Vdc	0 A	40 A	92%	±0.2%	±1.5%	SIL40C-12SADJ-VJ

## Part Number System with Options

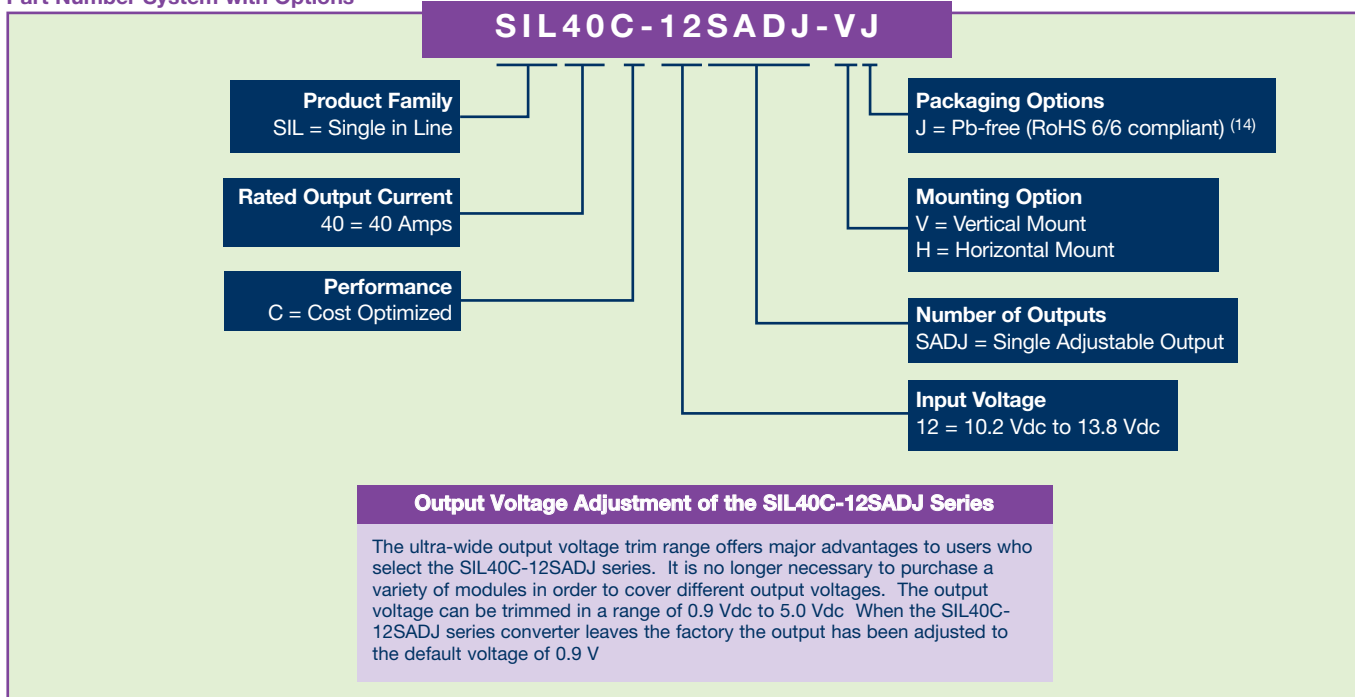

## Notes

- 1 Measured as per recommended set-up.  $2 \times C_{in} = 270 \mu\text{F}$  (20 m $\Omega$  esr max,  $3 \times C_{out} = 680 \mu\text{F}$  (10 m $\Omega$  esr max).
- 2  $di/dt = 10 \text{ A}/\mu\text{s}$ ,  $V_{in} = \text{Nom}$ ,  $T_c = 25^\circ\text{C}$ , load change = 0.50 I<sub>o</sub> max. to 0.75 I<sub>o</sub> max. and 0.75 I<sub>o</sub> max. to 0.50 I<sub>o</sub> max.
- 3 External input fusing is recommended.
- 4 Measured with external filter. See Application Note 132 for details.
- 5 Uses external resistor from trim pin to output ground. See Application Note 132 for details.
- 6 Signal line assumed <3 m in length
- 7 This product is only for inclusion by professional installers within other equipment and must not be operated as a stand alone product.
- 8 The standard unit with the suffix '-V' is for vertical mounting. To order a unit with horizontal mounting, please add the suffix '-H' to the model number, e.g. SIL40C-12SADJ-HJ.
- 9 Power-up is the time from application of dc input to Power Good enabled. Remote ON/OFF is from ON/OFF asserted high to power good enabled.
- 10 See Application Note 132 for operation above 50 °C.
- 11 See Application Note 132 for ripple current requirements.
- 12 These models have a wide trim output. The unit has an output of 0.9 Vdc to 5 Vdc. An external resistor adjusts the output voltage.
- 13 To order a unit with a pin length of 0.150", please add suffix 'P4' to the model number, e.g. SIL40C-12SADJ-HP4J.
- 14 TSE RoHS 5/6 (non Pb-free) compliant versions may be available on special request, please contact your local sales representative for details.
- 15 NOTICE: Some models do not support all options. Please contact your local Artesyn representative or use the on-line model number search tool at <http://www.artesyn.com/powergroup/products.htm> to find a suitable alternative.

# SIL40C Series

12 Vin single output

PIN CONNECTIONS	
PIN NUMBER	FUNCTION
1	Trim
2	No Pin
3	Ground
4	Power good
5	Not connected
6	Current share
7	Ground
8	Ground
9	Remote ON/OFF
10	Remote sense -
11	Remote sense +
12	Vin
13	Vin
14	Vin
15	Vout
16	Vout
17	Ground
18	Vout
19	Ground
20	Vout
21	Ground
22	Vout
23	Ground
24	Vout

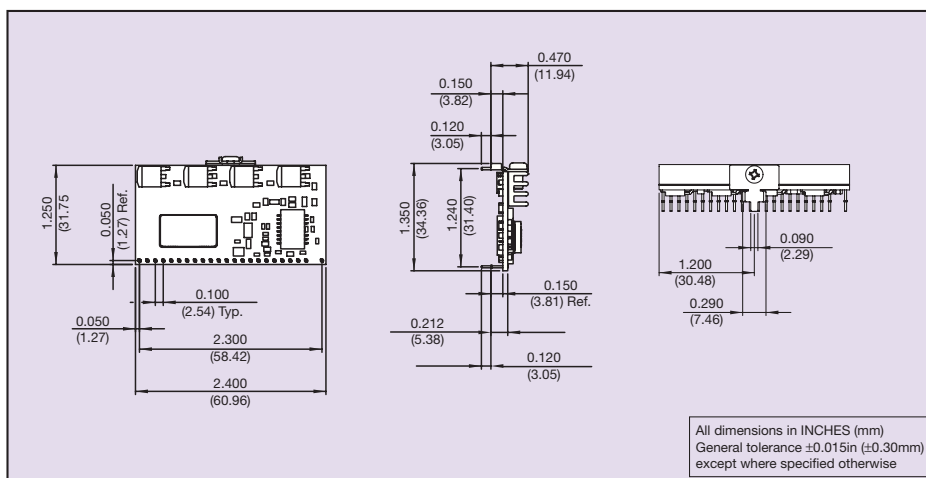


Figure 1: Mechanical Drawing - Horizontal Mount Version

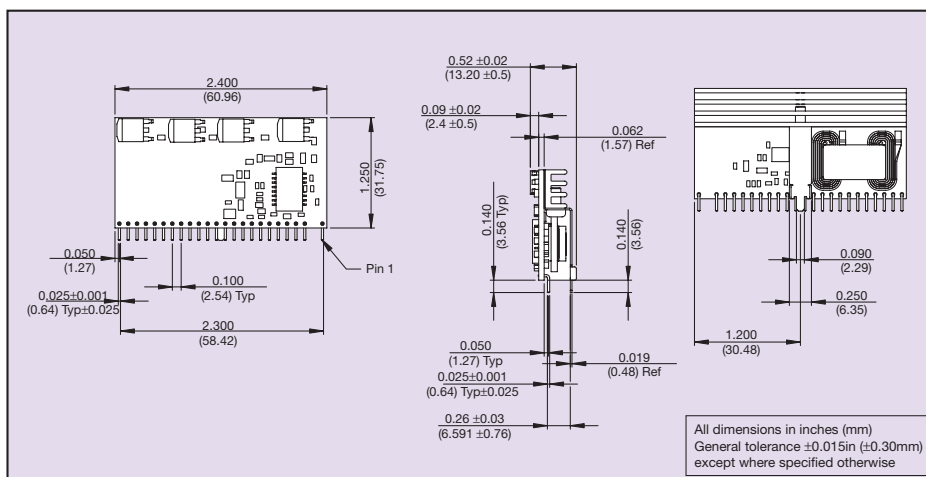


Figure 2: Mechanical Drawing - Vertical Mount Version

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Artesyn Embedded Technologies:](#)

[SIL40C-12SADJ-HJ](#) [SIL40C-12SADJ-VJ](#)