
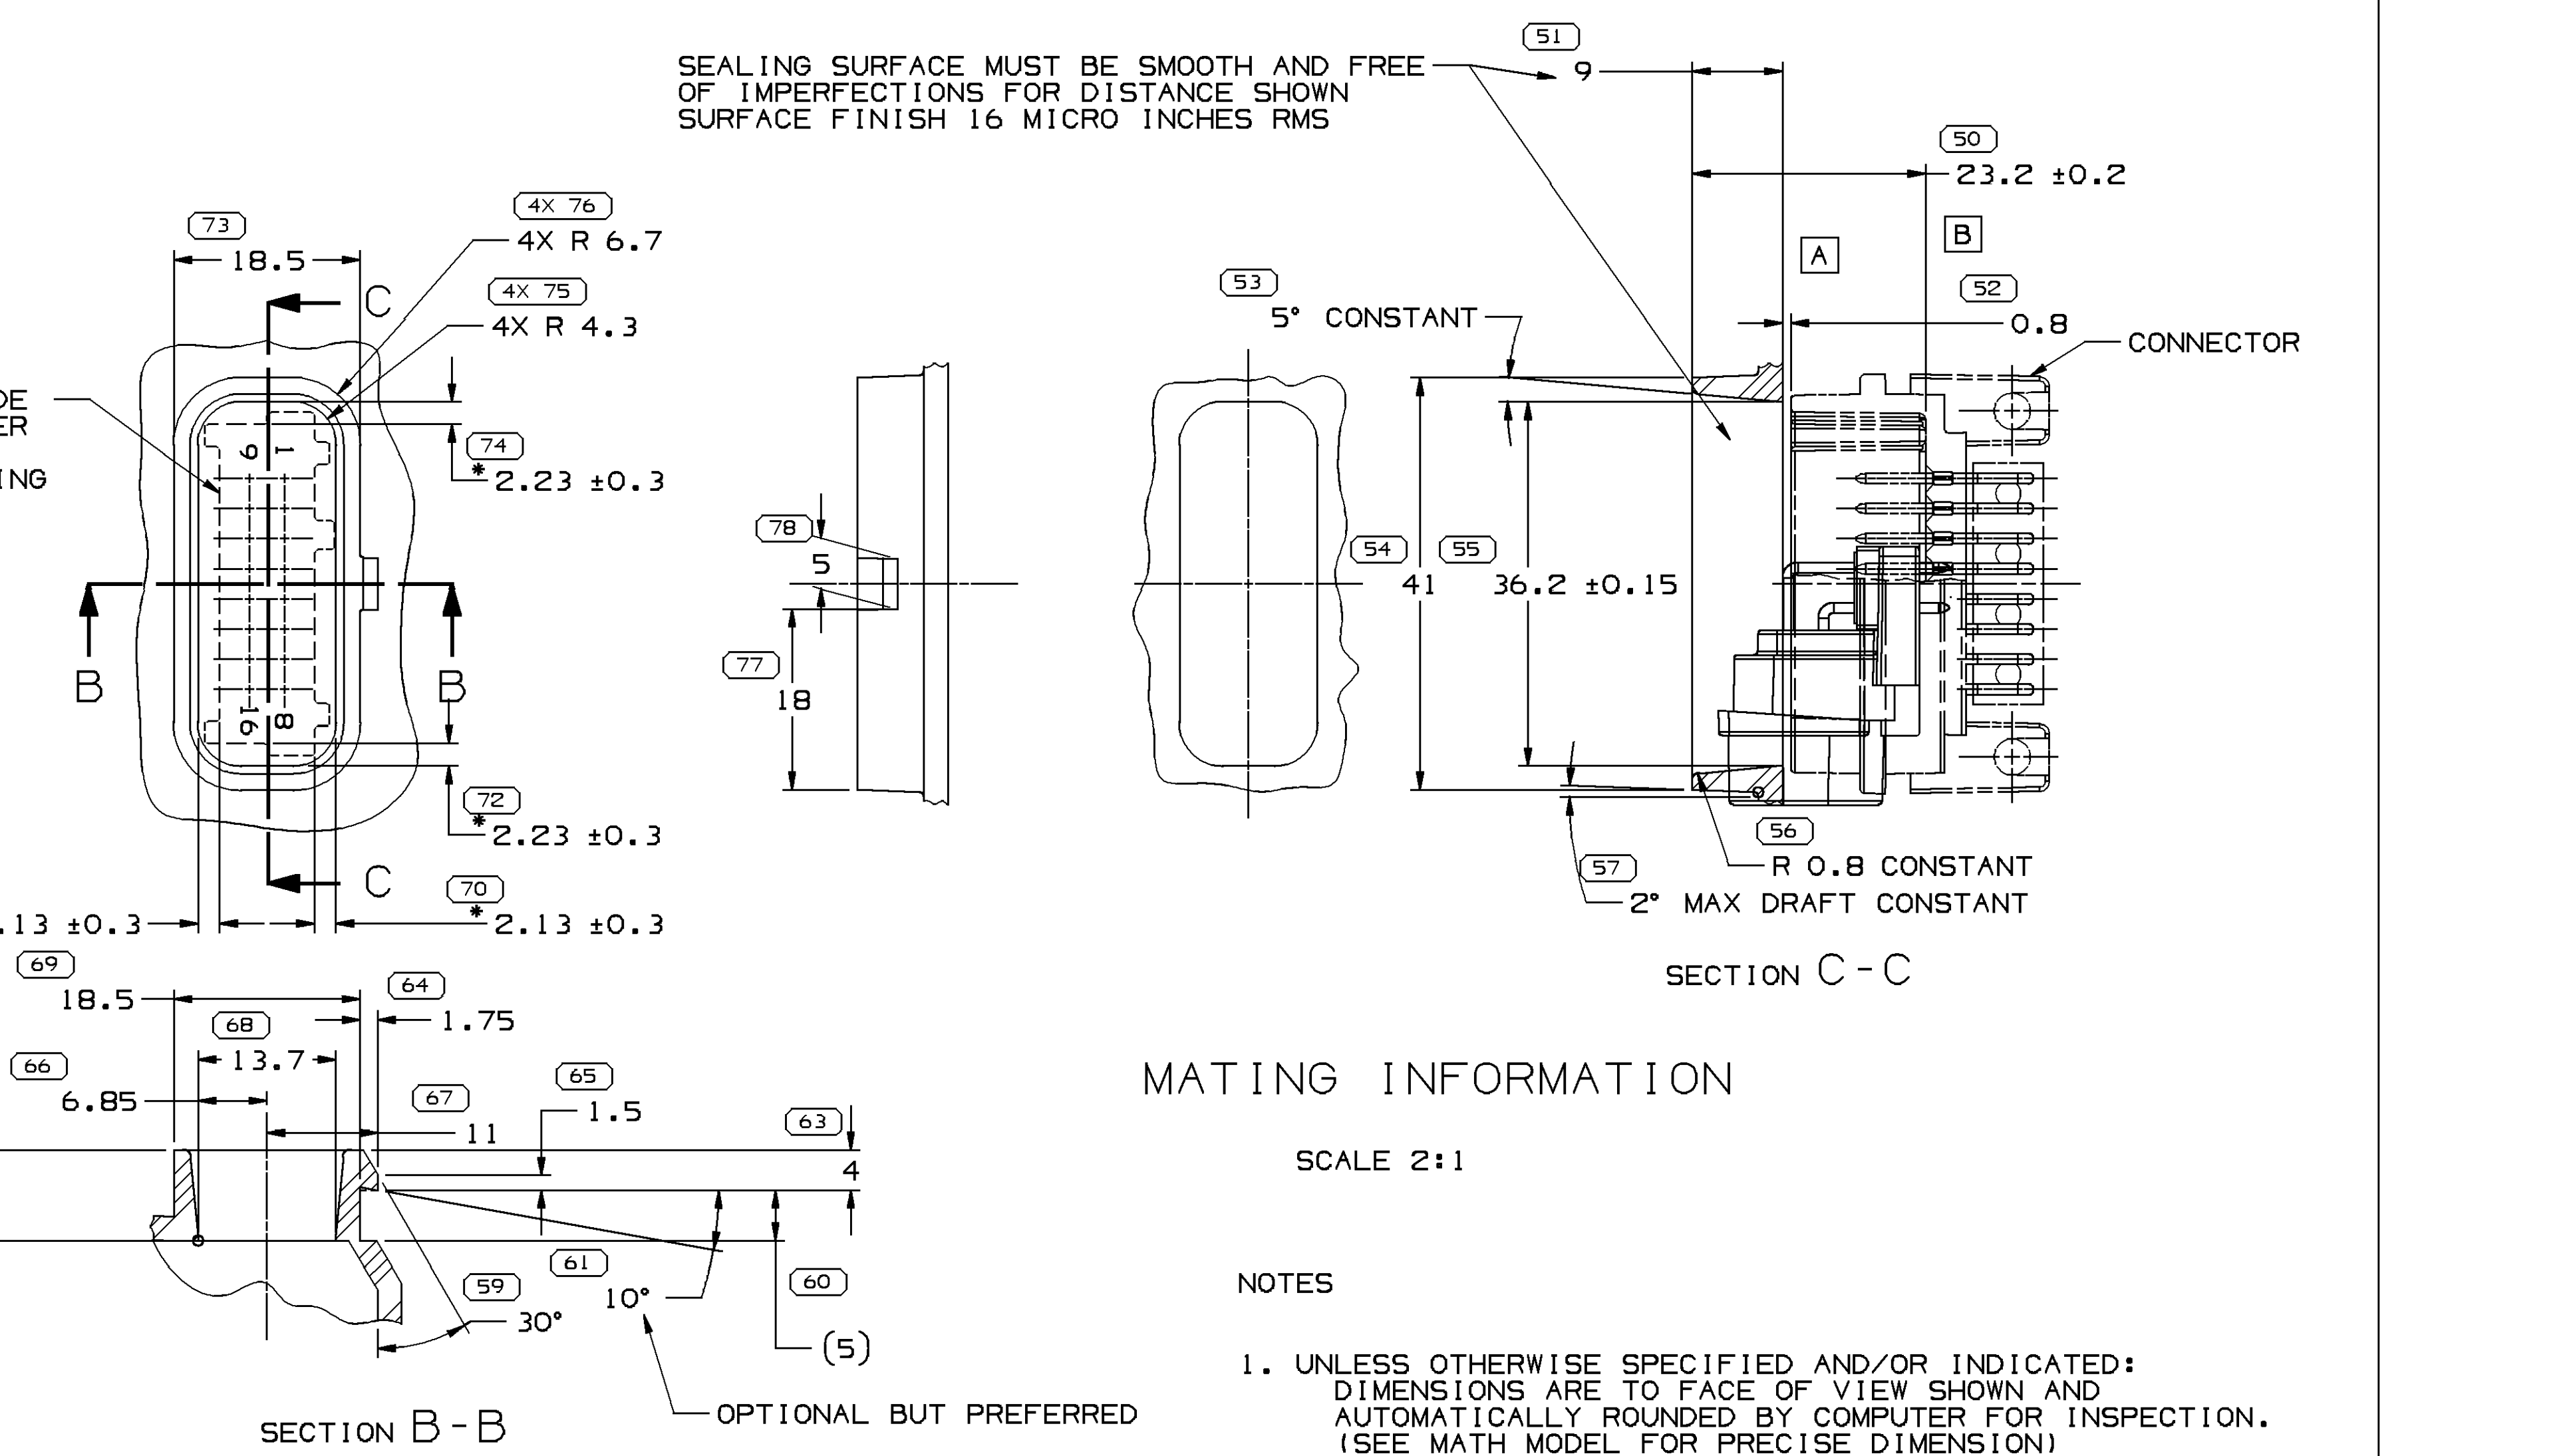
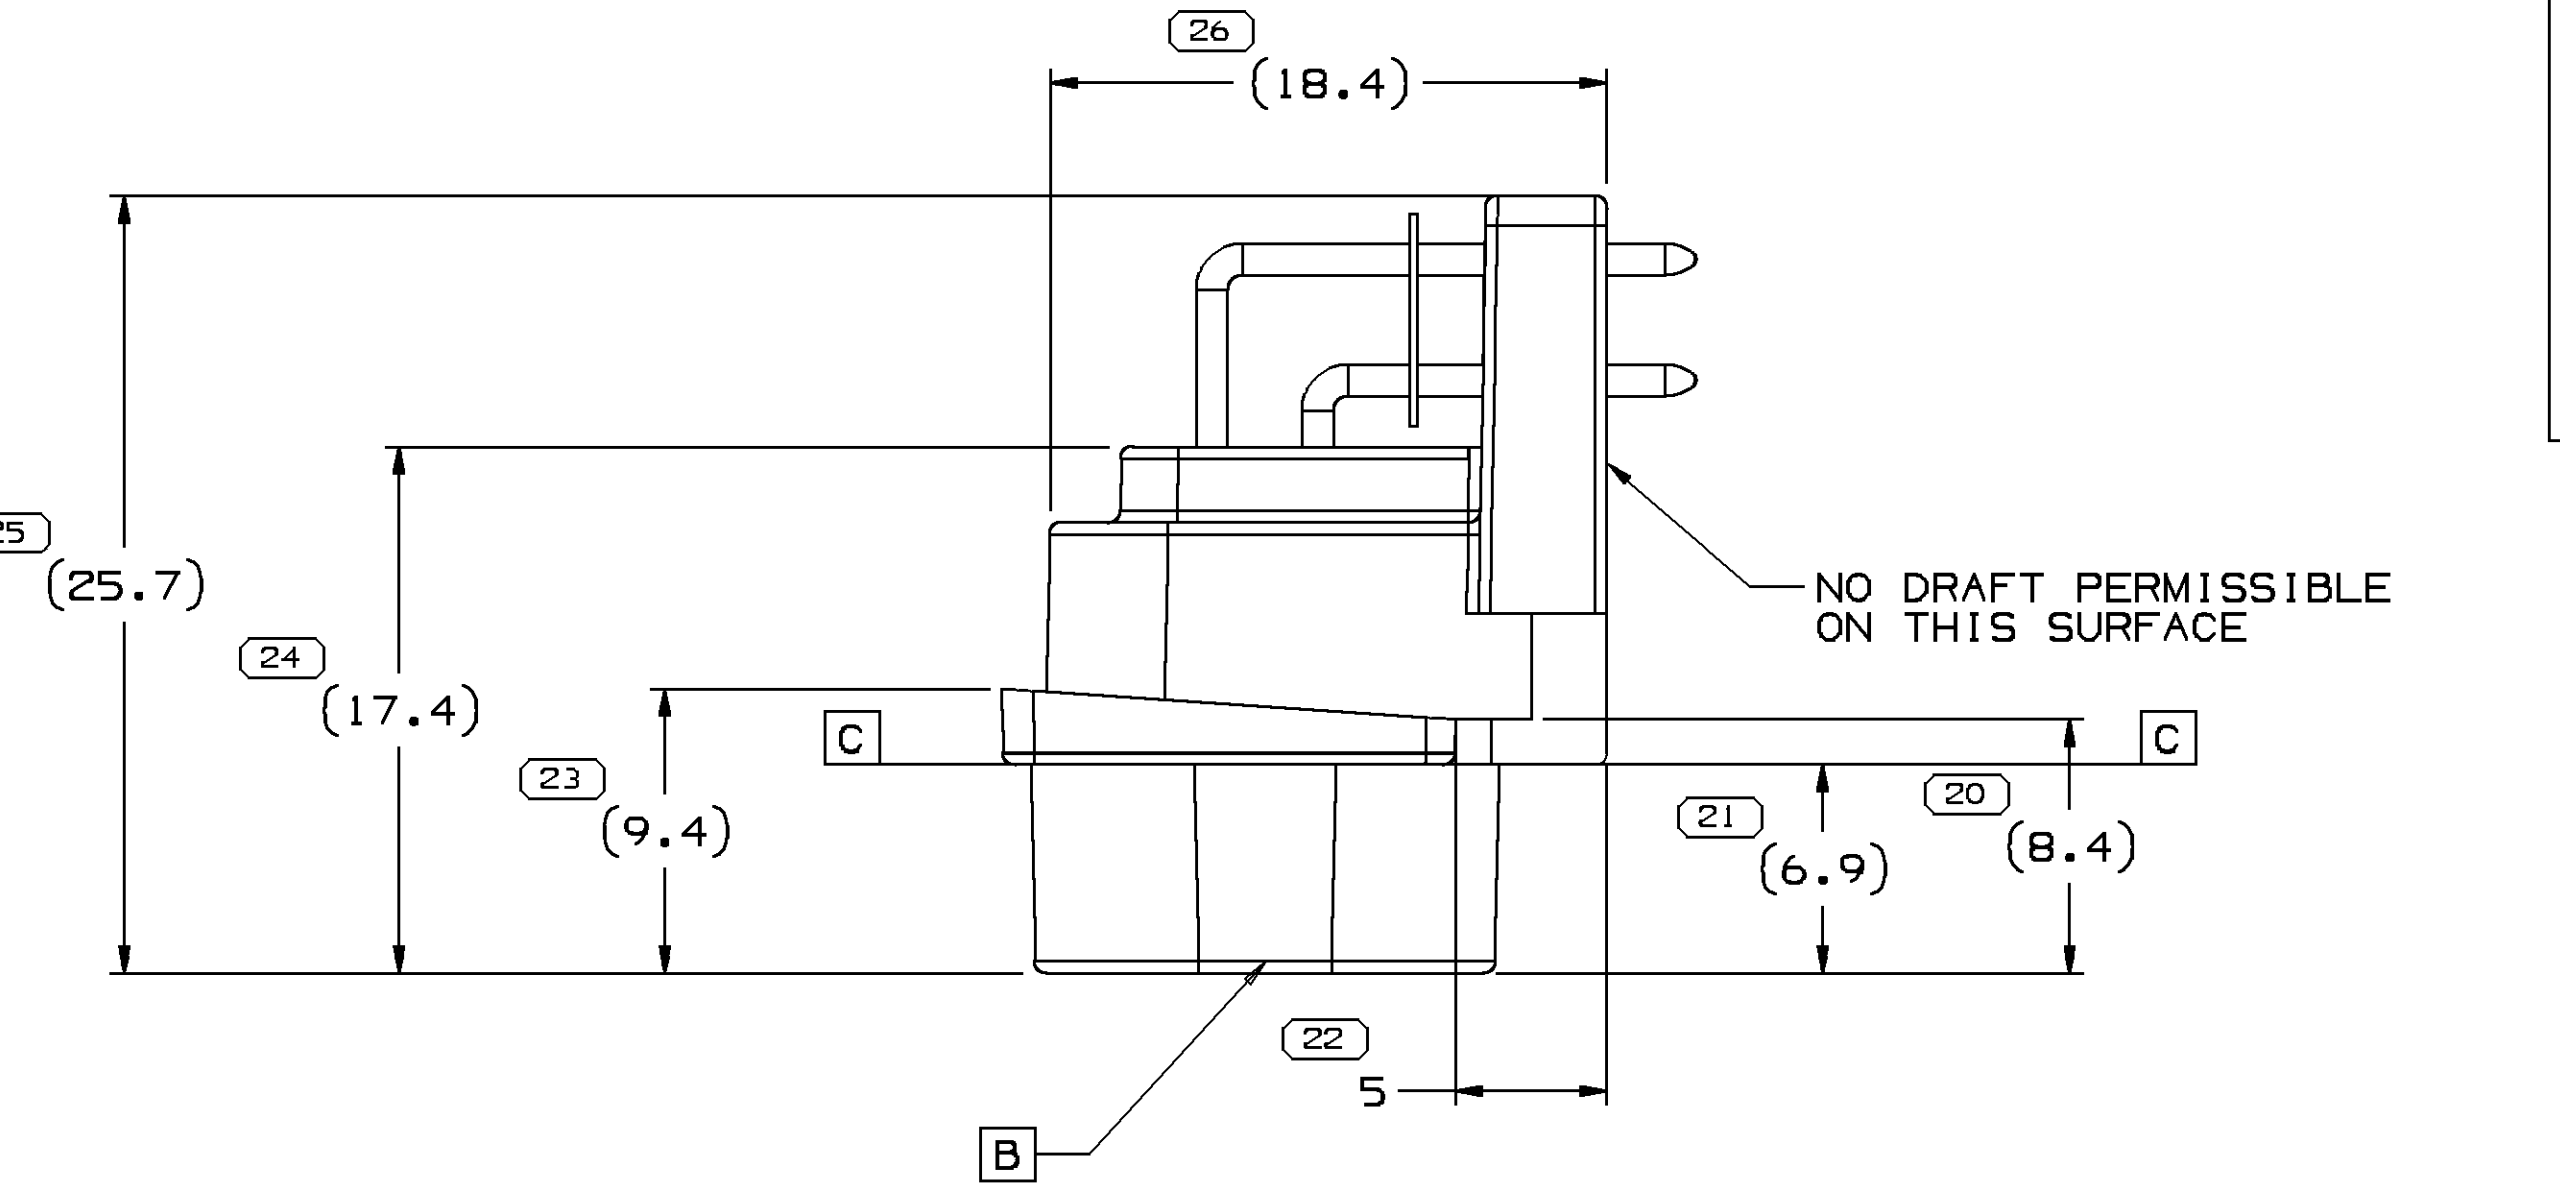
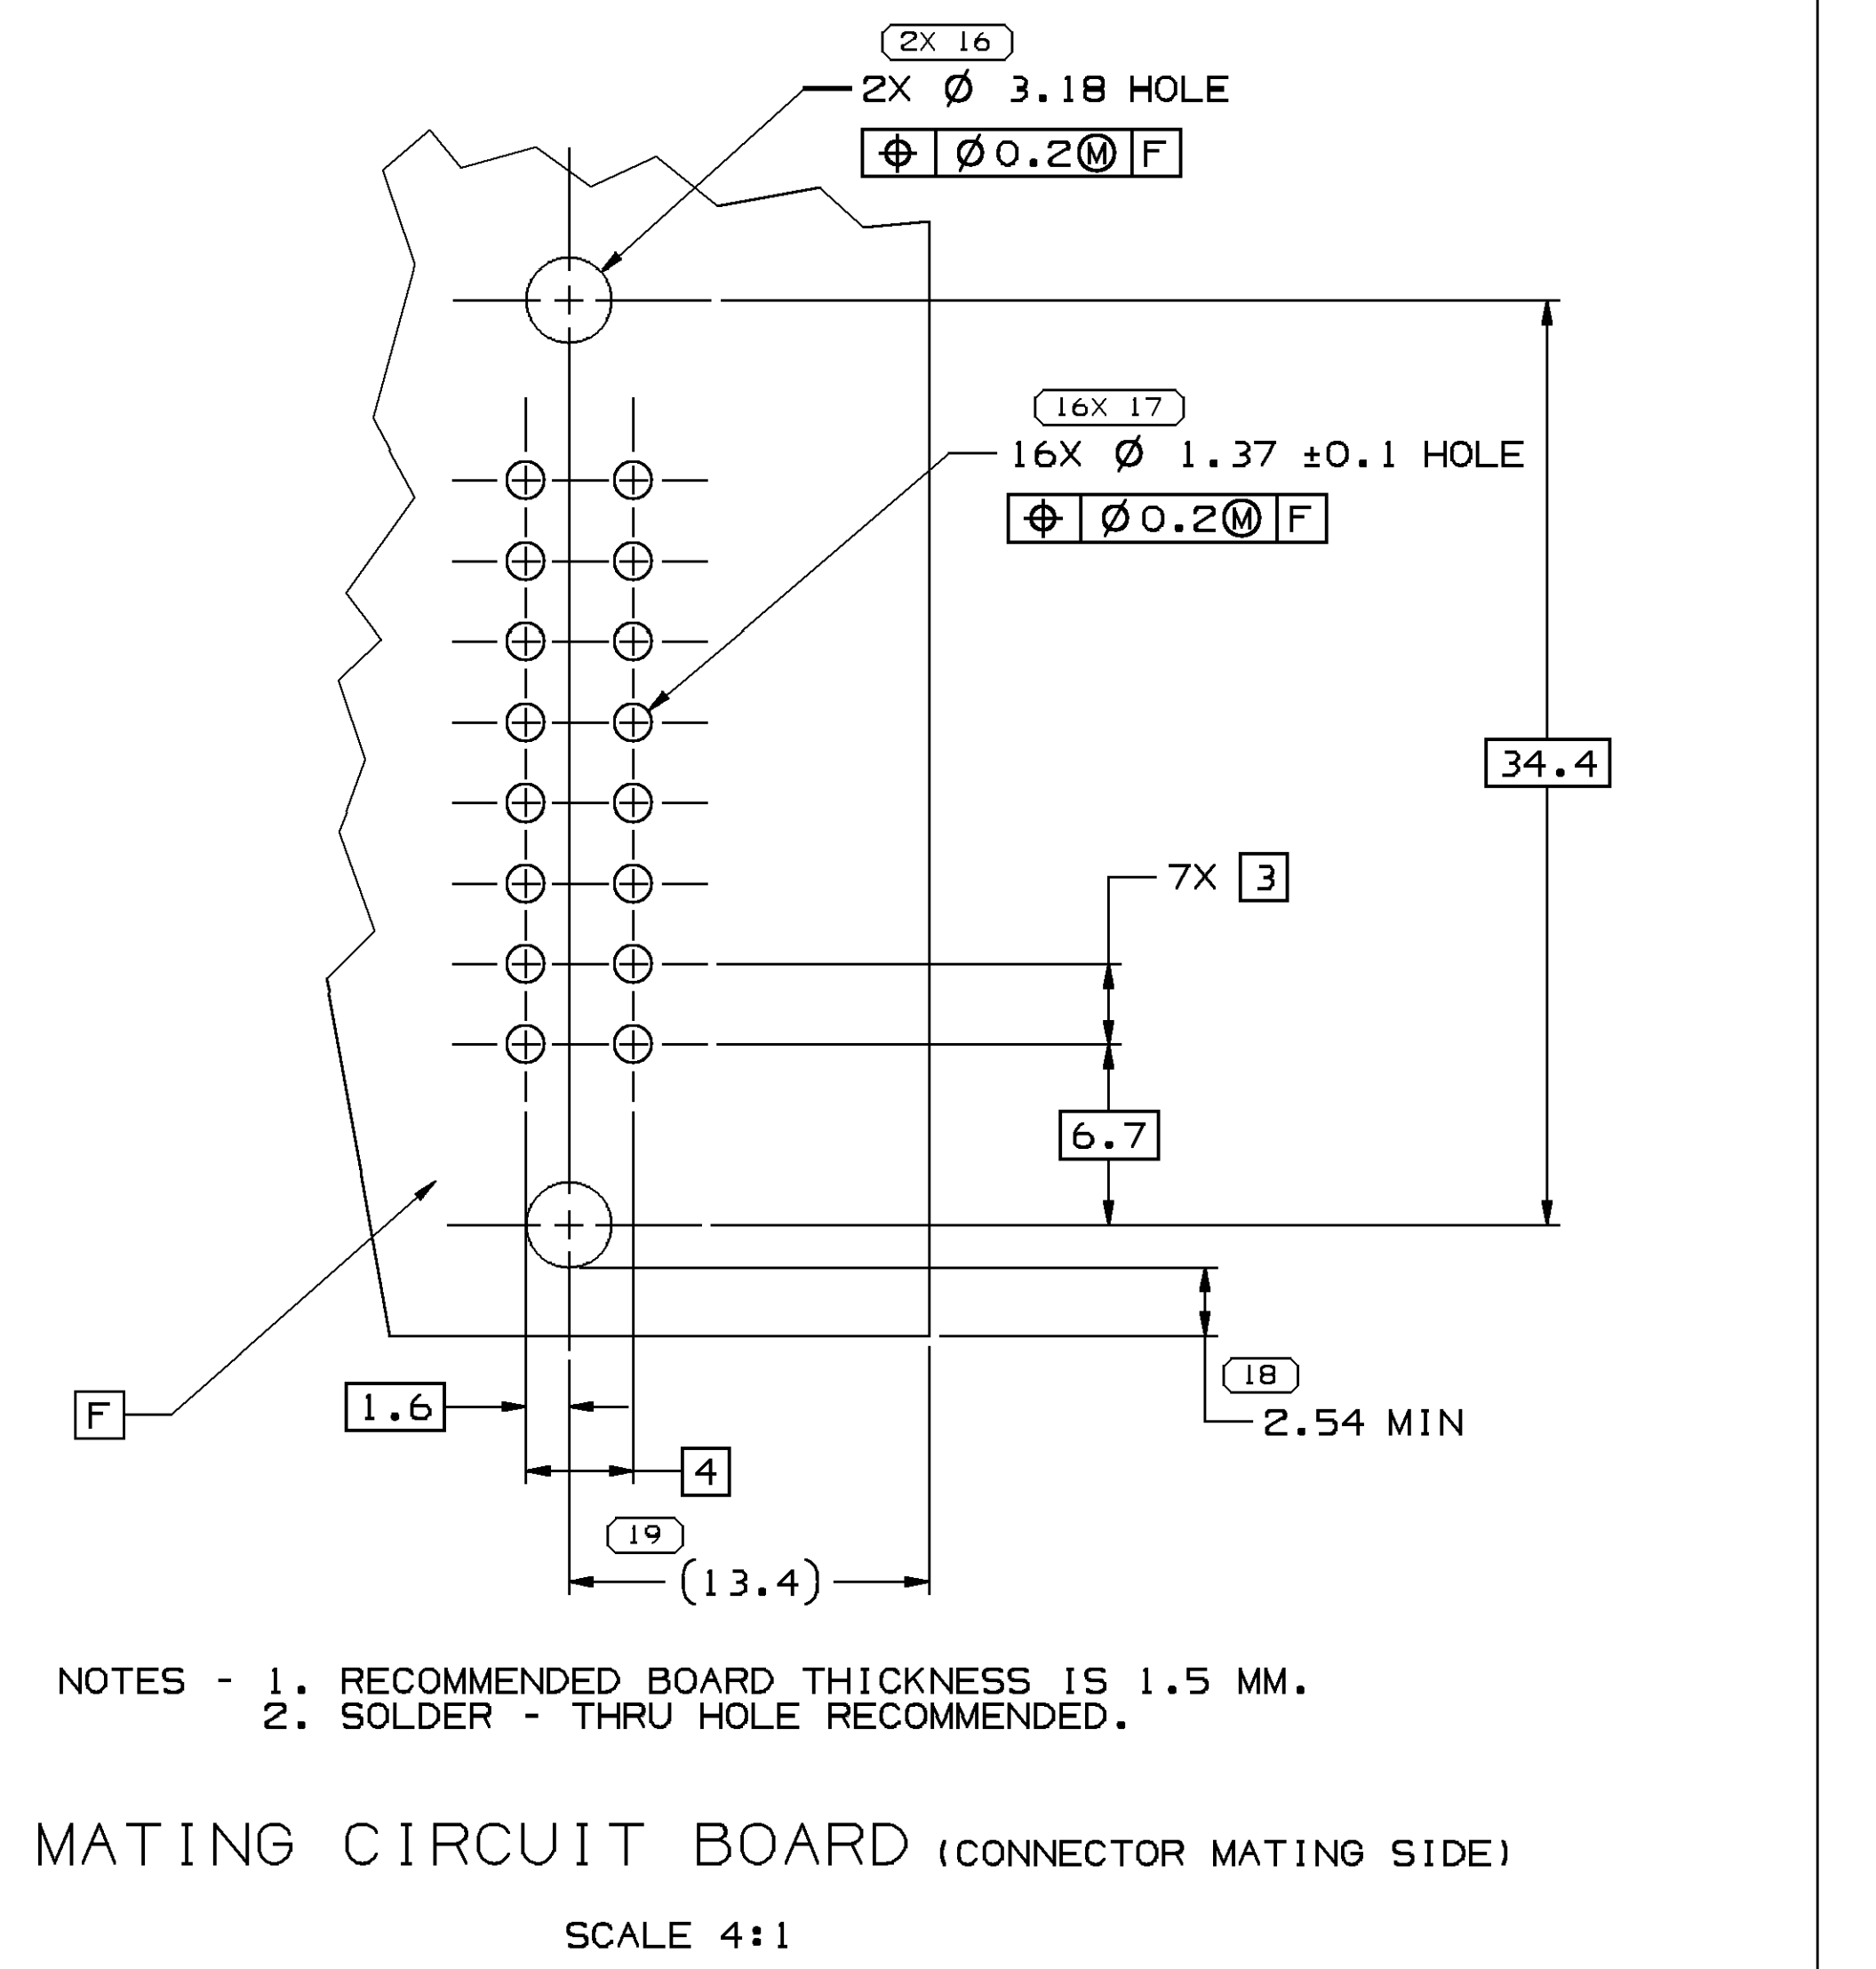


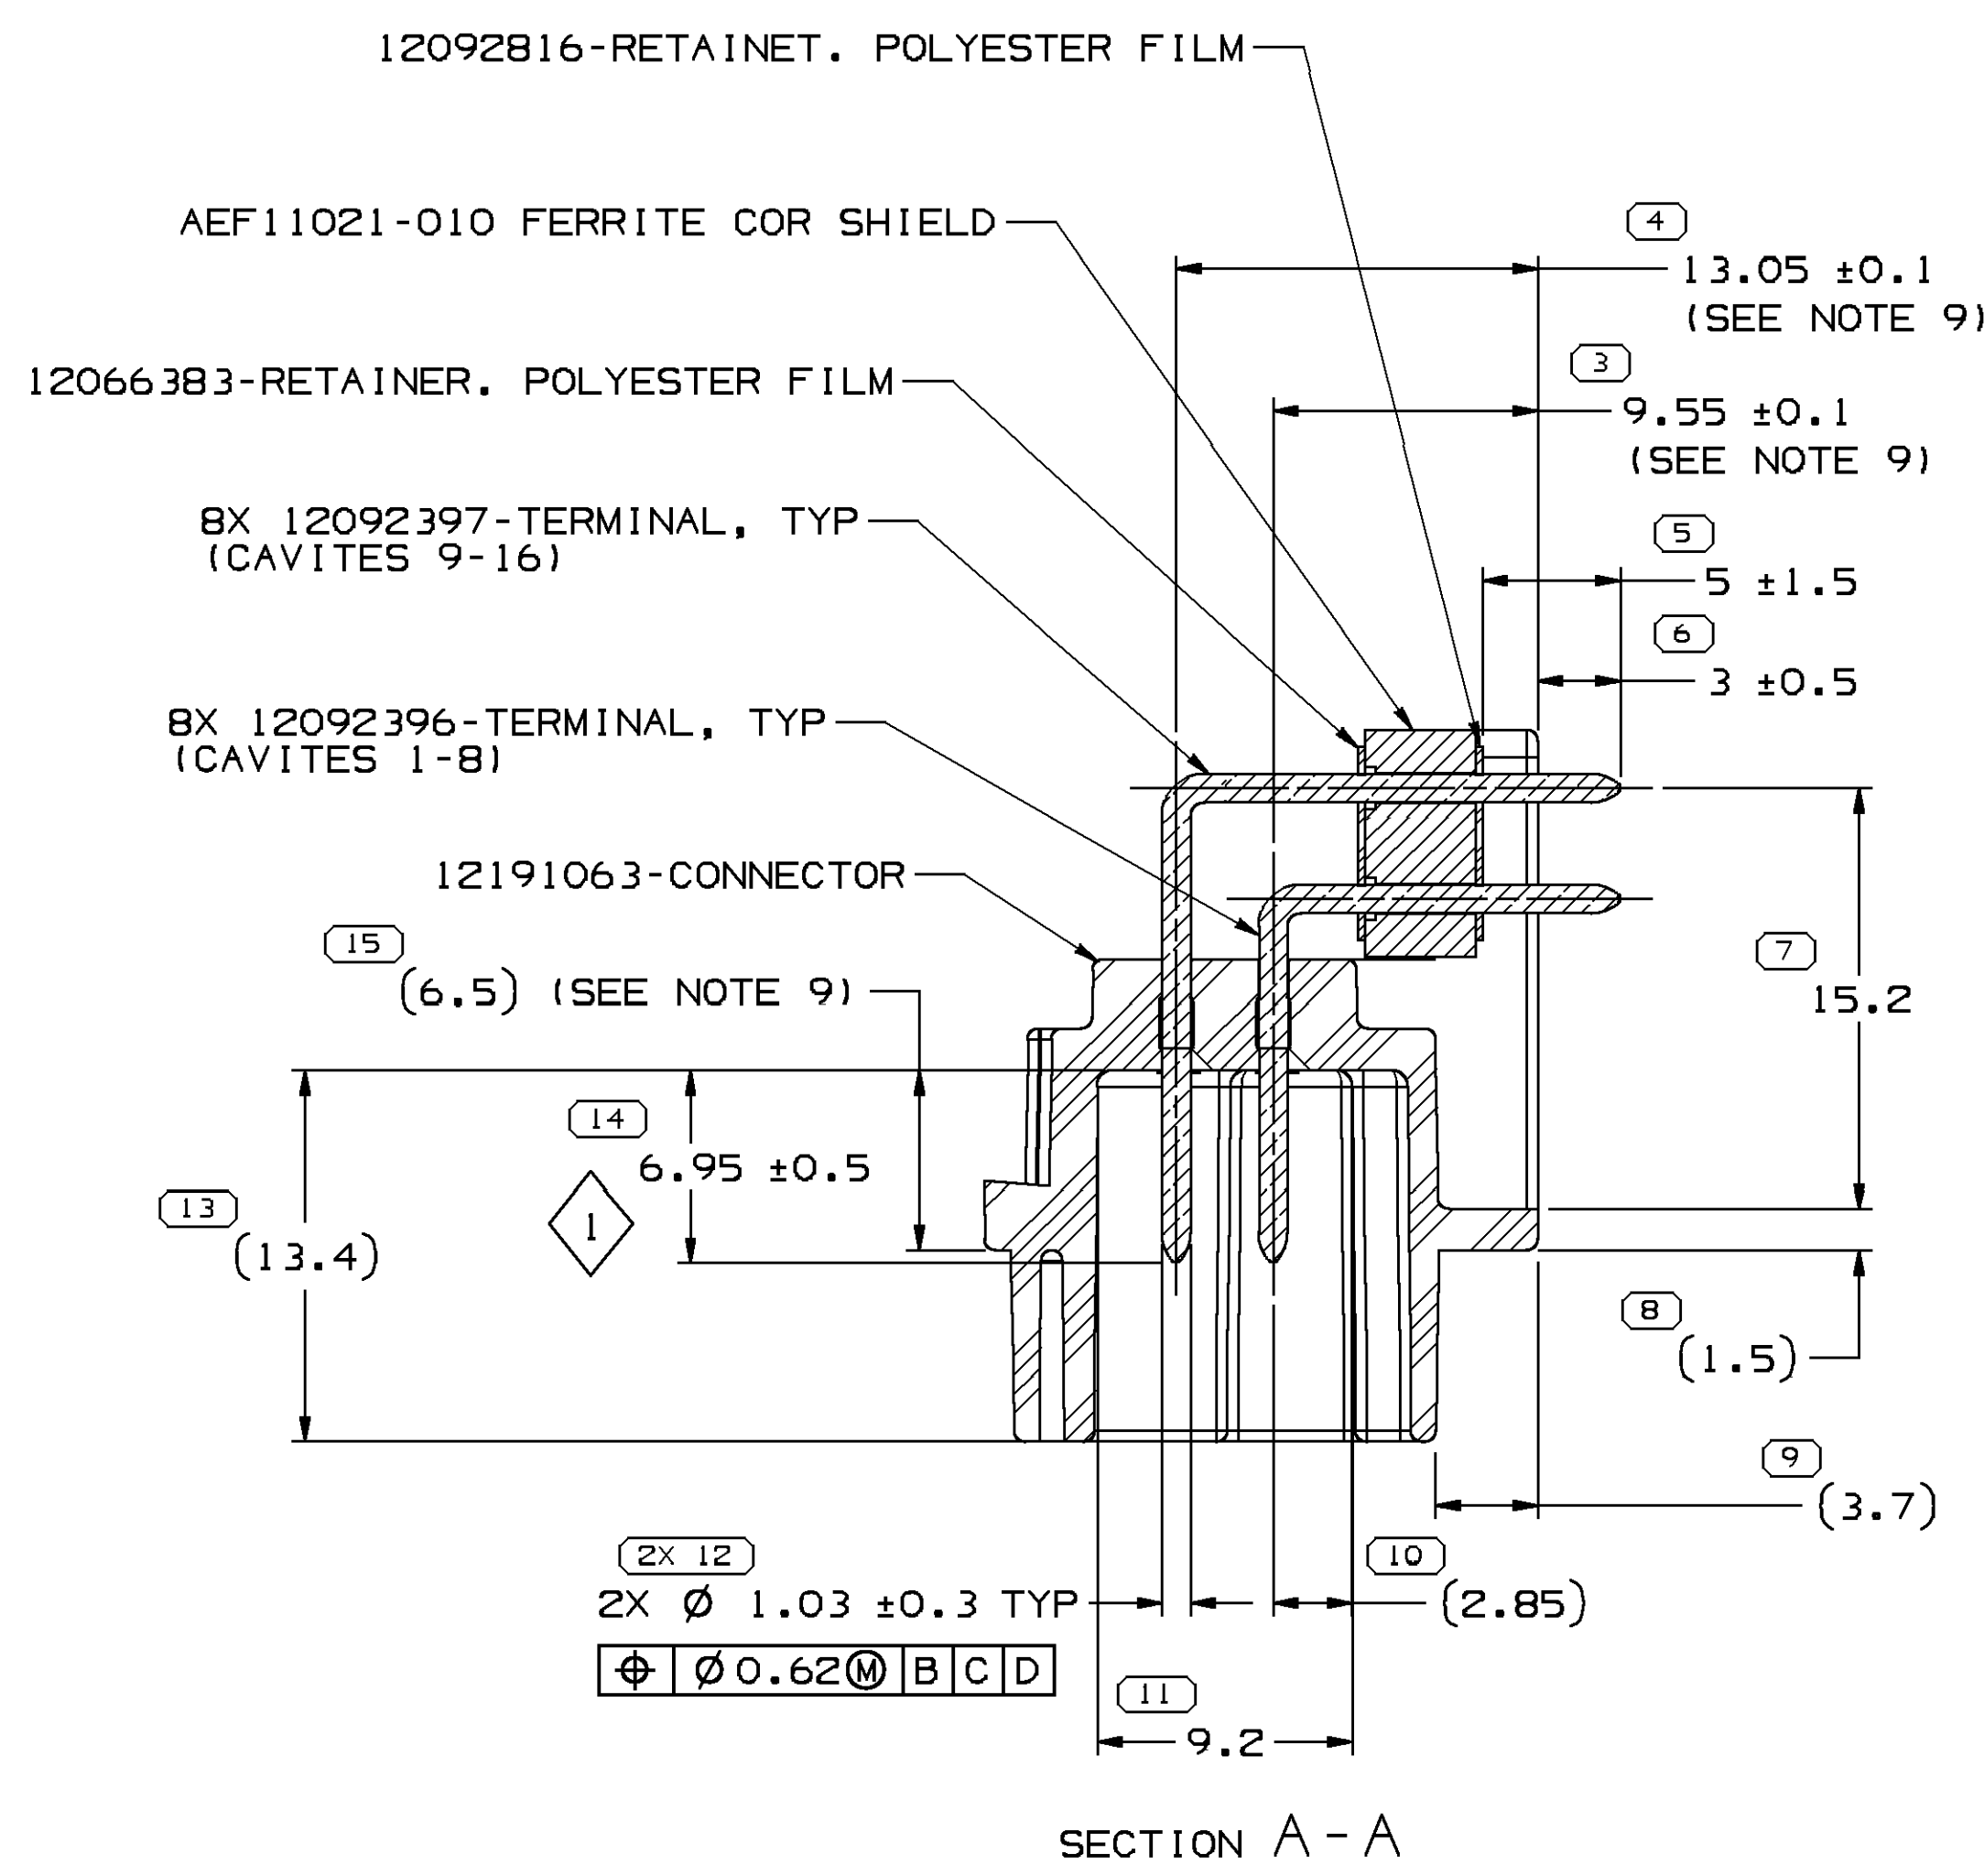

MATING INFORMATION

SCALE 2:1

NOTES

1. UNLESS OTHERWISE SPECIFIED AND/OR INDICATED: DIMENSIONS ARE TO FACE OF VIEW SHOWN AND AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION. (SEE MATH MODEL FOR PRECISE DIMENSION)
2. WHEN USING THIS INFORMATION FOR A NEW DESIGN REQUEST THE LATEST COPY OF THIS PRINT FROM PACKARD ELECTRIC DIVISION.
3. "*" DENOTES MEASUREMENTS TAKEN AT POINTS ON INSIDE OF HOUSING SHROUD AT DATUM "A" AND ON INSIDE OF HEADER SHROUD AT DATUM "B"

NOTES

1. UNLESS OTHERWISE SPECIFIED AND/OR INDICATED: DIMENSIONS ARE TO FACE OF VIEW SHOWN AND AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION. (SEE MATH MODEL FOR PRECISE DIMENSION)
2. MATING COMPONENTS: FEMALE CONNECTOR 12191065 OR EQUIVALENT SECONDARY LOCK (CPA) 12110299 OR EQUIVALENT
3. THIS PART IS NOT CONTROLLED FOR AUTOMATIC FEEDING.
4. PARTS SHOULD BE PLACED IN CLEAN PLASTIC TUBES, #0000863 OR EQUIVALENT, FOR SHIPPING AND STORAGE IN TOTE, #0000834 OR EQUIVALENT
5. SEE ESO-1505 FOR PACKAGING REQUIREMENTS.
6. PIN SOLDERABILITY - SEE ESO-1503 (MICROFICHE FILE). OUTSIDE VENDORS TO GET COPIES OF ESO-1503.
7. PARTS MUST MEET SPECIFICATION C-4006, CLASS I WITH THE FOLLOWING QUALIFICATIONS:
 - HIGH TEMP. STORAGE - CONDITION C
 - THERMAL CYCLING - CONDITION D
 - MECHANICAL SHOCK - CONDITION B
 - DUST - CONDITION E
 - CHEMICAL RESISTANCES - CONDITION A
 - (1) MIN. FOR THE FOLLOWING:
 - DIESEL FUEL (#2)
 - BRAKE FLUID
 - AUTOMATIC TRANSMISSION FLUID
 - ENGINE COOLANT
 - WINDSHIELD WASHER SOLVENT
 - GASOLINE
 - POWER STEERING FLUID
 - OIL (#3)
 - GASOLIN

8. KEY PRODUCT CHARACTERISTIC SYMBOLS (Ⓢ, Ⓡ) INDICATE PRODUCT CHARACTERISTICS THAT REQUIRE SPECIAL CARE, DOCUMENTATION, AND ACCEPTANCE CRITERIA PER GM TARGETS FOR EXCELLENCE AND PACKARD ELECTRIC PROCEDURES.
9. THIS DIMENSION IS INDICATED AS A KEY PRODUCT CHARACTERISTIC ON COMPONENT DRAWING 12191063
10. THIS PRODUCT IS NOT CATEGORIZED AS AN APPEARANCE ITEM. MINOR IMPERFECTIONS INCLUDING, BUT NOT LIMITED TO, FLOW MARKS, COLOR BLEMISHES, GATE VESTIGES, AND SOFT FLASH THAT DO NOT AFFECT THE FIT, FORM, OR FUNCTION OF THE PART ARE PERMISSIBLE PER DPNP-4.7-CS-01.

