


features

- Surface mount
- Operating temperature: -40°C ~ +125°C
- Flat top suitable for high speed pick-and-place components
- Excellent high frequency applications
- High Q factors and self-resonant frequency values
- Marking: White body color with no marking (0402)
Black body color with white marking (0603, 0805, 1008)
- Products with lead-free terminations meet EU RoHS requirements
- AEC-Q200 Qualified

dimensions and construction

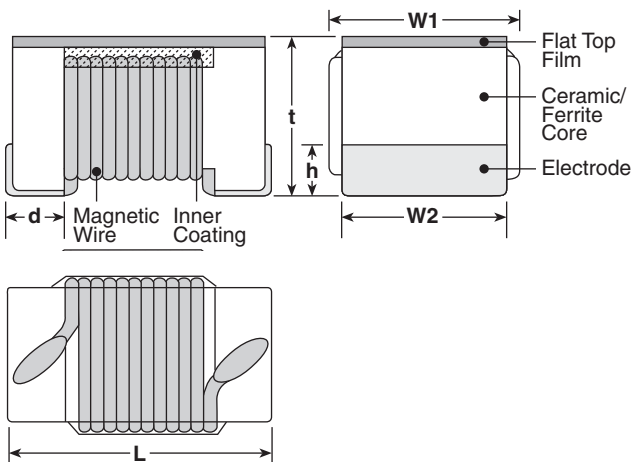

Size Code	Dimensions inches (mm)					
	L	W1	W2	t	h	d
KQT0402	.039±.004 (1.0±0.1)	.02±.004 (0.5±0.1)	.02±.004 (0.5±0.1)	.022±.004 (0.55±0.1)	.006±.004 (0.15±0.1)	.01±.004 (0.25±0.1)
KQ0603	.063±.004 (1.6±0.1)	.039±.004 (1.0±0.1)	.033±.004 (0.85±0.1)	.035±.004 (0.9±0.1)	.01±.006 (0.25±0.15)	.014±.004 (0.35±0.1)
KQ0805	.079±.008 (2.0±0.2)	.059±.008 (1.5±0.2) (3.3nH-390nH)	.053±.004 (1.35±0.1)	.051±.008 (1.3±0.2)	.016±.006 (0.40±0.15)	.018±.004 (0.45±0.1)
		.063±.008 (1.6±0.2) (470nH-820nH)				
KQ1008	.098±.008 (2.5±0.2)	.087±.008 (2.2±0.2)	.079±.004 (2.0±0.1)	.071 ⁺⁰⁰⁸ ₋₀ (1.8 ^{+0.2} ₋₀)	.018±.006 (0.45±0.15)	.018±.004 (0.45±0.1)

ordering information

New Part #	KQ	1008	T	TE	10N	J
Type	KQ KQT	Size Code 0402 0603 0805 1008	Termination Material T: Sn	Packaging TP: 2mm pitch paper (0402: 10,000 pieces/reel) TD: 7" paper tape (0402: 2,000 pieces/reel) TE: 7" embossed plastic (0603, 0805, 1008: 2,000 pieces/reel)	Nominal Inductance 3 digits: 10N: 10nH R10: 0.1µH 1R0: 1.0µH	Tolerance B: ±0.1nH C: 0.2nH G: ±2% H: ±3% J: ±5% K: ±10% M: ±20%

For further information on packaging, please refer to Appendix A.

applications and ratings

Part Designation	Marking	Nominal Inductance (nH)	L Measuring Frequency	Inductance Tolerance	Q Quality Factor Minimum	Q Measuring Frequency (MHz)	Self Resonant Frequency Minimum (MHz)	DC Resistance Maximum (Ω)	Allowable DC Current Maximum (mA)
KQT0402T**1N0*	—	1.0	250	B: ±0.1nH C: ±0.2nH	16	250	11000	0.045	1360
KQT0402T**1N9*		1.9					9600	0.070	1040
KQT0402T**2N0*		2.0			8000				
KQT0402T**2N2*		2.2					7200	0.120	700
KQT0402T**2N4*		2.4			19				
KQT0402T**2N7*		2.7					18	0.091	800
KQT0402T**3N3*		3.3			17				
KQT0402T**3N6*		3.6					20	0.086	680
KQT0402T**3N9*		3.9			22				
KQT0402T**4N3*		4.3					20	0.150	650
KQT0402T**4N7*		4.7		22	0.104	680			
KQT0402T**5N1*		5.1					20	0.150	650
KQT0402T**5N6*		5.6		21	0.195	480			
KQT0402T**6N2*		6.2					24	0.120	640
KQT0402T**6N8*		6.8		24	0.180	560			
KQT0402T**7N5*		7.5					25	0.200	500
KQT0402T**8N2*		8.2		24	0.230	480			
KQT0402T**8N7*		8.7					25	0.250	450
KQT0402T**9N0*		9.0		24	0.323	400			
KQT0402T**9N5*		9.5					24	0.214	400
KQT0402T**10N*		10		25	0.322	340			
KQT0402T**11N*		11					24	0.298	320
KQT0402T**12N*		12		25	0.354	300			
KQT0402T**13N*		13					24	0.393	300
KQT0402T**15N*		15		24	0.550	320			
KQT0402T**16N*		16					25	0.560	300
KQT0402T**18N*		18		24	0.550	300			
KQT0402T**19N*		19					24	0.620	320
KQT0402T**20N*		20		25	0.810	300			
KQT0402T**22N*		22					20	0.830	150
KQT0402T**23N*		23		25	0.835	240			
KQT0402T**24N*		24					25	1.170	200
KQT0402T**27N*		27		22	1.120	140			
KQT0402T**30N*		30					22	1.810	130
KQT0402T**33N*		33		22	2.090	130			
KQT0402T**34N*		34					22	2.320	120
KQT0402T**36N*		36		22	2.320	120			
KQT0402T**39N*		39					22	2.320	120
KQT0402T**40N*		40		22	2.320	120			
KQT0402T**43N*		43					22	2.320	120
KQT0402T**47N*	47	22	2.320	120					
KQT0402T**51N*	51				22	2.320	120		
KQT0402T**56N*	56	22	2.320	120					
KQT0402T**68N*	68				22	2.320	120		
KQT0402T**82N*	82	22	2.320	120					
KQT0402T**R10*	100				22	2.320	120		
KQT0402T**R12*	120	22	2.320	120					

* Add tolerance character (B, C, G, H, J, K, M)

** Add packaging code

For complete environmental specifications, please refer to www.koaspeer.com

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/16/11

applications and ratings (continued)

Inductors

Part Designation	Marking	Nominal Inductance (nH)	L Measuring Frequency	Inductance Tolerance	Q Quality Factor Minimum	Q Measuring Frequency (MHz)	Self Resonant Frequency Minimum (MHz)	DC Resistance Maximum (Ω)	Allowable DC Current Maximum (mA)
KQ0603TTE1N6*	C	1.6	250	J: $\pm 5\%$ K: $\pm 10\%$	24	250	12500	0.03	700
KQ0603TTE1N8*	0	1.8			16			0.045	
KQ0603TTE3N3*	X	3.3			22		6900	0.055	
KQ0603TTE3N6*	E	3.6						0.063	
KQ0603TTE3N9*	1	3.9					5900	0.08	
KQ0603TTE4N3*	F	4.3						0.063	
KQ0603TTE4N7*	G	4.7			20		5800	0.116	
KQ0603TTE5N1*	Y	5.1						0.115	
KQ0603TTE6N8*	2	6.8			27		4800	0.11	
KQ0603TTE7N5*	H	7.5						0.106	
KQ0603TTE8N2*	A	8.2		28	4600		0.12		
KQ0603TTE8N7*	J	8.7					0.109		
KQ0603TTE9N5*	B	9.5			4800		0.125		
KQ0603TTE10N*	3	10					0.13		
KQ0603TTE11N*	K	11		33	4000		0.086		
KQ0603TTE12N*	4	12					0.13		
KQ0603TTE15N*	5	15		34	3300		0.17		
KQ0603TTE16N*	L	16					0.104		
KQ0603TTE18N*	6	18		35	3100		0.17		
KQ0603TTE22N*	7	22					0.19		
KQ0603TTE23N*	S	23	38	3000	0.15				
KQ0603TTE24N*	M	24			0.135				
KQ0603TTE27N*	8	27	40	2800	0.22				
KQ0603TTE30N*	N	30			0.144				
KQ0603TTE33N*	9	33	40	2300	0.22				
KQ0603TTE36N*	P	36			0.25				
KQ0603TTE39N*	0	39	38	2080	0.28				
KQ0603TTE43N*	Q	43				0.30			
KQ0603TTE47N*	1	47	40	2200	1900	0.31			
KQ0603TTE51N*	T	51				0.34			
KQ0603TTE56N*	2	56	37	1700	1400	0.49			
KQ0603TTE68N*	3	68				0.54			
KQ0603TTE72N*	4	72	34	1350	1300	0.61			
KQ0603TTE82N*	5	82				0.65			
KQ0603TTER10*	6	100	32	1400	1400	1.4			
KQ0603TTER11*	7	110				1.4			
KQ0603TTER12*	8	120	25	1200	1200	2.2			
KQ0603TTER15*	9	150				2.3			
KQ0603TTER18*	0	180	24	1000	900	2.5			
KQ0603TTER20*	U	200				2.4			
KQ0603TTER21*	V	210	24	900	840	2.3			
KQ0603TTER22*	1	220				3.17			
KQ0603TTER25*	W	250	30	800	800	3.0			
KQ0603TTER27*	2	270				3.7			
KQ0603TTER30*	X	300	30	700	700	1.21			
KQ0603TTER33*	3	330				1.26			
KQ0603TTER39*	4	390	50	J: $\pm 5\%$ K: $\pm 10\%$	50	640			
KQ0603TTER47*	5	470				190			
KQ0603TTER51*	V	510				610	170		

* Add tolerance character (B, C, G, H, J, K, M)

For complete environmental specifications, please refer to www.koaspeer.com

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/31/10

applications and ratings (continued)

Part Designation	Marking	Nominal Inductance (nH)	L Measuring Frequency	Inductance Tolerance	Q Quality Factor Minimum	Q Measuring Frequency (MHz)	Self Resonant Frequency Minimum (MHz)	DC Resistance Maximum (Ω)	Allowable DC Current Maximum (mA)								
KQ0603TTER56*	6	560	50	J: $\pm 5\%$ K: $\pm 10\%$	30	50	560	2.09	130								
KQ0603TTER62*	W	620					590	1.89	150								
KQ0603TTER68*	7	680					540	1.97	140								
KQ0603TTER75*	X	750					530	2.04	130								
KQ0603TTER82*	8	820					490	3.09	110								
KQ0603TTER91*	Y	910					480	2.95	120								
KQ0603TTE1R0*	9	1000					440	5.13	90								
KQ0603TTE1R2*	0	1200					400	5.45	80								
KQ0805TTE3N3*	0	3.3					250	G: $\pm 2\%$ J: $\pm 5\%$ K: $\pm 10\%$	50	1500	6000	0.08	600				
KQ0805TTE6N8*	1	6.8	1000	5500	0.11												
KQ0805TTE8N2*	2	8.2	4700	0.12													
KQ0805TTE12N*	3	12	4000	0.15													
KQ0805TTE15N*	4	15	3400	0.17													
KQ0805TTE18N*	5	18	3300	0.20													
KQ0805TTE20N*	Y	20	55	500	2600	0.22			500								
KQ0805TTE22N*	6	22			2500	0.25											
KQ0805TTE27N*	7	27			2050	0.27											
KQ0805TTE33N*	8	33			2000	0.29											
KQ0805TTE39N*	9	39			60	500	1650	0.34									
KQ0805TTE43N*	4	43					1650	0.31									
KQ0805TTE47N*	0	47					1550	0.34									
KQ0805TTE56N*	1	56					1450	0.38									
KQ0805TTE68N*	2	68	65	500	1300	0.42	400										
KQ0805TTE82N*	3	82			1200	0.46											
KQ0805TTER10*	4	100	150	G: $\pm 2\%$ J: $\pm 5\%$ K: $\pm 10\%$	50	1100	0.51	400									
KQ0805TTER12*	5	120				920	0.56										
KQ0805TTER15*	6	150				870	0.64		400								
KQ0805TTER16*	H	160															
KQ0805TTER17*	J	170															
KQ0805TTER18*	7	180															
KQ0805TTER19*	D	190															
KQ0805TTER20*	E	200															
KQ0805TTER21*	F	210															
KQ0805TTER22*	8	220								100	50	250	850	0.70			
KQ0805TTER23*	K	230	48	500	350												
KQ0805TTER24*	L	240				650	1.0										
KQ0805TTER25*	G	250				600	1.4	310									
KQ0805TTER27*	9	270							560				1.5				
KQ0805TTER33*	0	330							375				1.76	250			
KQ0805TTER39*	1	390							340				1.9	230			
KQ0805TTER47*	2	470							50				100	250			
KQ0805TTER56*	3	560													25	50	190
KQ0805TTER68*	4	680															
KQ0805TTER82*	5	820							215	2.35	180						
KQ1008TTE10N*	10N	10	50	J: $\pm 5\%$ K: $\pm 10\%$ M: $\pm 20\%$	50	500	4100	0.08	1000								
KQ1008TTE12N*	12N	12					3300	0.09									
KQ1008TTE15N*	15N	15					3000	0.10									
KQ1008TTE18N*	18N	18			55	350	350	2500		0.11							
KQ1008TTE22N*	22N	22						2400		0.12							
KQ1008TTE27N*	27N	27						1600		0.13							

Inductors

* Add tolerance character (C, G, H, J, K, M) For complete environmental specifications, please refer to www.koaspeer.com
Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

applications and ratings (continued)

Inductors

Part Designation	Marking	Nominal Inductance (nH)	L Measuring Frequency	Inductance Tolerance	Q Quality Factor Minimum	Q Measuring Frequency (MHz)	Self Resonant Frequency Minimum (MHz)	DC Resistance Maximum (Ω)	Allowable DC Current Maximum (mA)	
KQ1008TTE33N*	33N	33	50	J: ±5% K: ±10% M: ±20%	60	350	1600	0.14	1000	
KQ1008TTE39N*	39N	39					1500	0.15		
KQ1008TTE47N*	47N	47					1300	0.18		
KQ1008TTE56N*	56N	56			65		1000	0.20		
KQ1008TTE68N*	68N	68					950	0.22		
KQ1008TTE82N*	82N	82					850	0.56		
KQ1008TTER10*	R10	100	25	G: ±2% J: ±5% K: ±10%	60	100	0.70	650		
KQ1008TTER12*	R12	120					750	0.63		
KQ1008TTER15*	R15	150					700	0.77		
KQ1008TTER18*	R18	180					600	0.84		
KQ1008TTER22*	R22	220					570	0.91		
KQ1008TTER27*	R27	270			45		50	500	1.05	500
KQ1008TTER33*	R33	330						450	1.12	470
KQ1008TTER39*	R39	390						415	1.19	400
KQ1008TTER47*	R47	470						375	1.33	300
KQ1008TTER56*	R56	560						360	1.40	400
KQ1008TTER62*	R62	620						350	1.47	360
KQ1008TTER68*	R68	680						320	1.54	380
KQ1008TTER75*	R75	750						290	1.68	370
KQ1008TTER82*	R82	820						250	1.75	310
KQ1008TTER91*	R91	910						200	1.6	300
KQ1008TTE1R0*	1R0	1000			35		50	160	1.7	270
KQ1008TTE1R2*	1R2	1200						220	1.9	250
KQ1008TTE1R5*	1R5	1500						140	2.2	230
KQ1008TTE1R8*	1R8	1800						110	2.3	210
KQ1008TTE2R2*	2R2	2200						90	2.7	240
KQ1008TTE2R7*	2R7	2700			22		25	80	2.8	200
KQ1008TTE3R3*	3R3	3300						70	3.1	170
KQ1008TTE3R9*	3R9	3900						65	2.5	150
KQ1008TTE4R7*	4R7	4700			20		7.9	60	2.8	150
KQ1008TTE5R6*	5R6	5600						80	2.5	170
KQ1008TTE6R8*	6R8	6800	70	2.8		200				
KQ1008TTE8R2*	8R2	8200	15	7.9	65	2.5	170			
KQ1008TTE100*	100	10000			60	3.4	150			

* Add tolerance character (C, G, H, J, K, M)

environmental applications

Performance Characteristics

Parameter	Requirements Maximum Δ L/L		Test Method
	Limit	Typical	
Resistance to Soldering Heat	No significant abnormality in appearance Δ L/L: ±5%, Δ Q/Q: ±10%	Δ L/L: ±2.7% Δ Q/Q: ±6.6%	260°C ± 5°C, 10s ± 1s
Rapid Change of Temperature	No significant abnormality in appearance Δ L/L: ±5%, Δ Q/Q: ±10%	Δ L/L: ±2.1% Δ Q/Q: ±5.3%	-40°C (30min.) / +125°C (30min.) 100 cycles
Low Temperature Exposure	No significant abnormality in appearance Δ L/L: ±5%, Δ Q/Q: ±10%	Δ L/L: ±1.8% Δ Q/Q: ±2.8%	-40°C ± 2°C, 1000h
High Temperature Exposure	No significant abnormality in appearance Δ L/L: ±5%, Δ Q/Q: ±10%	Δ L/L: ±1.8% Δ Q/Q: ±5.3%	125°C ± 2°C, 1000h
Moisture Exposure	No significant abnormality in appearance Δ L/L: ±5%, Δ Q/Q: ±10%	Δ L/L: ±0.9% Δ Q/Q: ±6.9%	40°C ± 2°C, 90%~95%RH, 1000h
Resistance to Solvent	No damage and marking shall remain legible	—	Accordance with MIL-STD 202F Method 215

For complete environmental specifications, please refer to www.koaspeer.com

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/31/10