


## NON-INSULATED RING TERMINALS

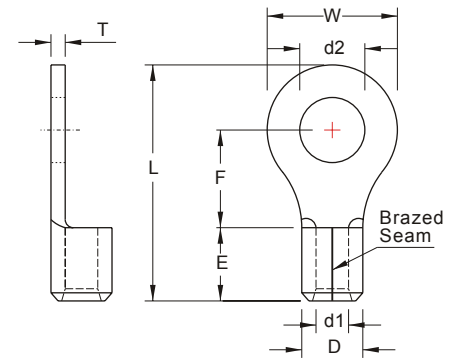

**MAXIMUM ELECTRIC CURRENT:**

|        |     |     |
|--------|-----|-----|
| A.W.G. | 500 | 600 |
| AMP.   | 620 | 690 |

**TERMINAL MATERIAL: COPPER**

**SURFACE TREATMENT: TIN PLATED**

| WIRE RANGE<br>A.W.G.<br>mm <sup>2</sup> | ITEM NO.    |             | STUD SIZE |               | DIMENSION <sup>inch</sup><br>mm |               |                |               |               |               | CRIMPING TOOL | Q'TY BOX                                                                                                                 |               |               |               |             |                                                                                                                          |   |
|-----------------------------------------|-------------|-------------|-----------|---------------|---------------------------------|---------------|----------------|---------------|---------------|---------------|---------------|--------------------------------------------------------------------------------------------------------------------------|---------------|---------------|---------------|-------------|--------------------------------------------------------------------------------------------------------------------------|---|
|                                         | BRAZED SEAM | BUTTED SEAM | d2        |               | W                               | F             | L              | E             | D             | d1            |               |                                                                                                                          | T             |               |               |             |                                                                                                                          |   |
| 500/600<br>MCM                          | RNB325-14   |             | 9/16      | .591<br>15.0  | 1.988<br>50.5                   | 1.319<br>33.5 | 3.465<br>88.0  | 1.398<br>35.5 | 1.480<br>37.6 | 1.102<br>28.0 | .169<br>4.3   | IZUMI MODEL<br>12K-1<br>12#A<br>WITH DIE INDEX<br>NO:325<br><br>OR<br>K.S. MODEL<br>KSTP-325<br>WITH DIE INDEX<br>NO:400 | 5             |               |               |             |                                                                                                                          |   |
|                                         | RNB325-16   |             | 5/8       | .669<br>17.0  |                                 |               |                |               |               |               |               |                                                                                                                          | 5             |               |               |             |                                                                                                                          |   |
|                                         | RNBL325-16  |             | 5/8       | .669<br>17.0  |                                 |               |                |               |               |               |               |                                                                                                                          | 5             |               |               |             |                                                                                                                          |   |
|                                         | RNB325-18   |             | 11/16     | .748<br>19.0  |                                 |               |                |               |               |               |               |                                                                                                                          | 5             |               |               |             |                                                                                                                          |   |
| 325 mm <sup>2</sup>                     | RNB325-20   |             | 3/4       | .827<br>21.0  |                                 | 1.772<br>45.0 | 4.161<br>105.7 |               |               |               |               |                                                                                                                          | 1.398<br>35.5 | 1.480<br>37.6 | 1.102<br>28.0 | .169<br>4.3 | IZUMI MODEL<br>12K-1<br>12#A<br>WITH DIE INDEX<br>NO:325<br><br>OR<br>K.S. MODEL<br>KSTP-325<br>WITH DIE INDEX<br>NO:400 | 5 |
|                                         | RNB325-22   |             | 7/8       | .906<br>23.0  |                                 |               |                |               |               |               |               |                                                                                                                          |               |               |               |             |                                                                                                                          | 5 |
|                                         | RNB325-24   |             | 15/16     | .984<br>25.0  |                                 |               |                |               |               |               |               |                                                                                                                          |               |               |               |             |                                                                                                                          | 5 |
|                                         | RNB325-27   |             | 1         | 1.102<br>28.0 |                                 |               |                |               |               |               |               |                                                                                                                          |               |               |               |             |                                                                                                                          | 5 |




ALL LISTED

\* : ADDITIONAL CERTIFIED

■ : 90D available

Products can be bend to 90-degrees angle.

## NON-INSULATED RING TERMINALS

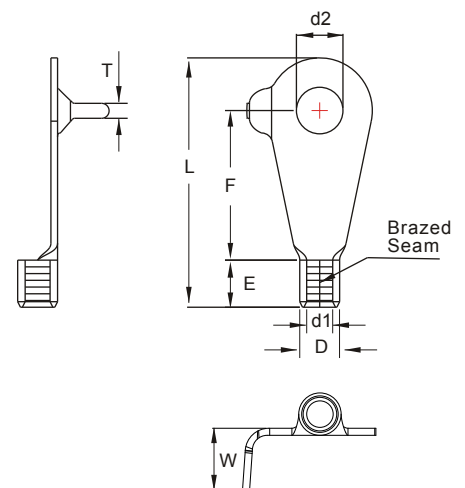

**MAXIMUM ELECTRIC CURRENT:**

|        |    |  |
|--------|----|--|
| A.W.G. | 8  |  |
| AMP.   | 70 |  |

**TERMINAL MATERIAL: COPPER**

| WIRE RANGE<br>A.W.G.<br>mm <sup>2</sup> | ITEM NO.    |             | STUD SIZE |             | DIMENSION <small>inch mm</small> |               |               |             |             |             |             | CRIMPING TOOL | Q'TY BOX |
|-----------------------------------------|-------------|-------------|-----------|-------------|----------------------------------|---------------|---------------|-------------|-------------|-------------|-------------|---------------|----------|
|                                         | BRAZED SEAM | BUTTED SEAM | d2        |             | W                                | F             | L             | E           | D           | d1          | T           |               |          |
| 8 A.W.G.<br>8 mm <sup>2</sup>           | RNBTL8-8    |             | 5/16      | .331<br>8.4 | .413<br>10.5                     | 1.063<br>27.0 | 1.772<br>45.0 | .335<br>8.5 | .283<br>7.2 | .185<br>4.7 | .106<br>2.7 | KST2000D-1322 | 200      |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[KS Terminals:](#)

[RNB325-20](#) [RNB325-22](#) [RNBL325-16](#)