SYMBOL DEFINITION		MISSING SYMBOLS
A DIMENSION WITHOUT AN INSPECTION REPORT SYMBOL, DOES NOT REQUIRE INSPECTION. IT MAY BE CONTROLLED ON THE INDIVIDUAL COMPONENT DRAWING.	TOTAL NO. OF INSPECTIONS REQUIRED: 44	7 9-10 12-23 25-32 34-36 39-42 45 48-50 52 150 160-175 177-186 188-189
	LAST NO. USED: 198	



TERMINAL, CABLE ALIGNMENT VIEWS
SCALE 10:1



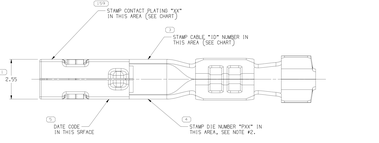





SPLICE AND REEL SPECIFICATIONS
SCALE 5:1



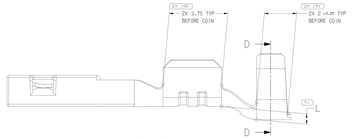









NOTES

1. UNLESS OTHERWISE SPECIFIED AND/OR INDICATED:

   DIMENSIONS ARE TO FACE OF VIEW SHOWN WHERE
   DIMENSIONS ARE NOT SHOWN, USE CAD INSPECTION
   USE WITH MODEL FOR PRECISE DIMENSIONS). FOR ALL
   OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL
   BUILD, SEE WITH MODEL FOR PRECISE TOOL PATH DATA.
   ALL RADII 0.2

2. "PXX" INDICATES "P" PLUS LAST TWO DIGITS OF WAVE DIE SERIES NUMBER (P01, P02, P03, ETC).

3. (((#)))) CORPORATE BRAND STAMP TO BE LOCATED ON THIS EXTERIOR SURFACE, VISIBLE AT FINAL ASSEMBLY. OPTIONAL CONSTRUCTION FOR EXISTING TOOLING MAY BE "PRD" OR "PCL" LOGO.

4. TERMINAL SYMMETRICAL ABOUT CENTERLINE EXCEPT AS SHOWN.

5. RECOMMENDED MATING BLADE THICKNESS PER USCAR STANDARD (MCAP-00)

6. AFTER MANUFACTURE, DO NOT PROBE, TEST, OR OTHERWISE CONTACT THE INTERIOR REGION (THE SPRING OR ANY MOVING PART) OF THIS TERMINAL. SEVERE DAMAGE CAN OCCUR, COMPROMISING THE PERFORMANCE OF THE ELECTRICAL INTERFACE.

7. PLATING TYPE:

   i. MATTE TIN 1.27 - 2.54 MICROMETERS THICK
   ii. MATTE TIN 1.27 - 3.81 MICROMETERS THICK
   iii. SILVER 2.0 MICROMETERS MINIMUM OVER NICKEL UNDERPLATE 1.27 - 2.54 MICROMETERS THICK
   iv. GOLD 0.76 MICROMETERS MINIMUM OVER NICKEL UNDERPLATE 1.27 - 2.54 MICROMETERS THICK
   v. HOT DIPPED 95/5 TIN/SILVER 1.0 - 3.5 MICROMETERS THICK
   vi. SULFAMATE DUCTILE NICKEL 1.27 - 2.54 MICROMETERS THICK

   PLATING TYPE INFORMATION SHOWN ABOVE IS REFERENCE ONLY. PLATING REQUIREMENTS ARE CONTAINED IN APPLICABLE MATERIAL SPECIFICATION.

| MAIN PART NUMBER | | | | | | | TERMINAL BODY | | | | | | |

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Aptiv:
13972928