



(CERAMIC RESONATOR) SURFACE MOUNT

Bandpass Filter

CBP2-1125CC+

Mini-Circuits

50Ω

1085 to 1165 MHz

KEY FEATURES


- Good Insertion Loss, 1.7 dB Typ.
- High Rejection, 75 dB Typ.
- Low-Profile Shielded Package

APPLICATIONS

- Test and Measurements
- Wireless Communication
- Industrial, Scientific, and Medical (ISM) Applications


PRODUCT OVERVIEW

All our coaxial-ceramic resonator filters are built with rugged construction, qualified to withstand multiple demanding reflow cycles. Excellent repeatability across units is achieved through precise tuning and process control.



Generic photo used for illustration purposes only

FUNCTIONAL DIAGRAM

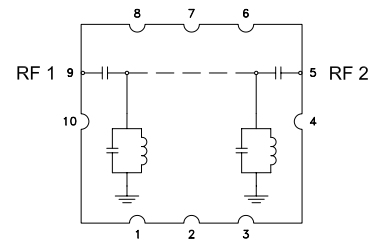

ELECTRICAL SPECIFICATIONS^{1,2,3} AT +25°C

Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Units
Passband	Center Frequency	—	—	1125	—	MHz
	Insertion Loss	F1-F2	1085 - 1165	1.7	2.5	dB
	Return Loss	F1-F2	1085 - 1165	10	15	dB
Stopband, Lower	Rejection	DC-F3	DC - 700	65	75	dB
		F3-F4	700 - 1010	20	30	dB
Stopband, Upper	Rejection	F5-F6	1245 - 1400	20	30	dB
		F6-F7	1400 - 2100	50	58	dB

1. Tested in Evaluation Board P/N TB-CBP2-1125CC+.

2. This filter is bi-directional RF1 and RF2 ports may be interchanged, see S-Parameters for actual performance.

3. This component should not be used as a DC-block. In applications where DC voltage and/or current is present at either the input or output ports, external DC blocking capacitors are required.


ABSOLUTE MAXIMUM RATINGS⁴

Parameter	Ratings
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +100°C
Input Power ⁵	8 W at 25°C

4. Permanent damage may occur if any of these limits are exceeded.





5. Power rating applies only to signals within the passband. Power rating above +25°C operating temperature decreases linearly to 2 W at +85°C.

TYPICAL FREQUENCY RESPONSE AT +25°C

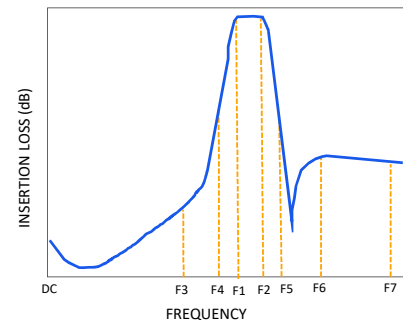



TYPICAL PERFORMANCE GRAPHS

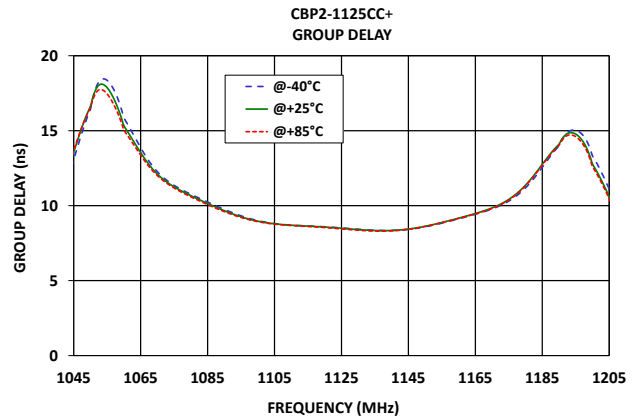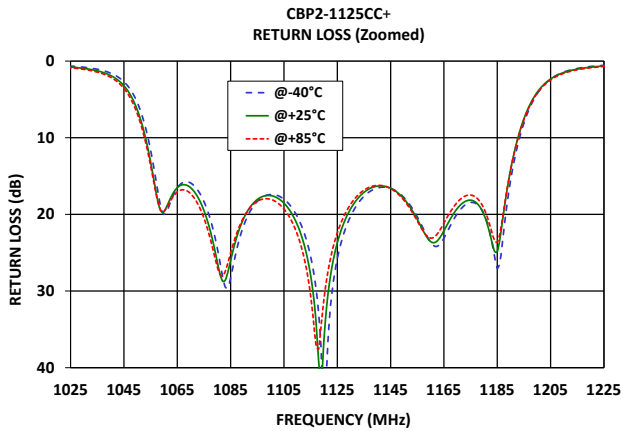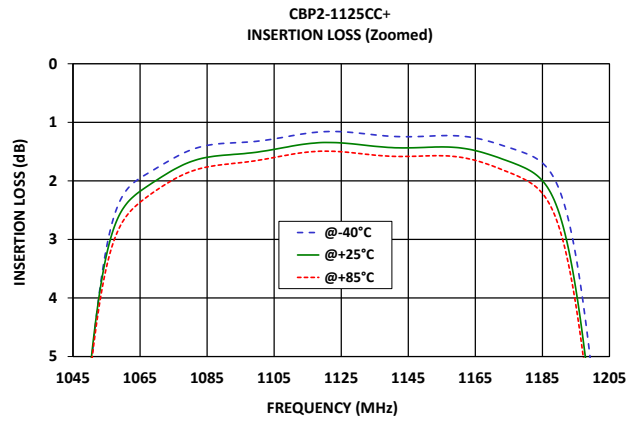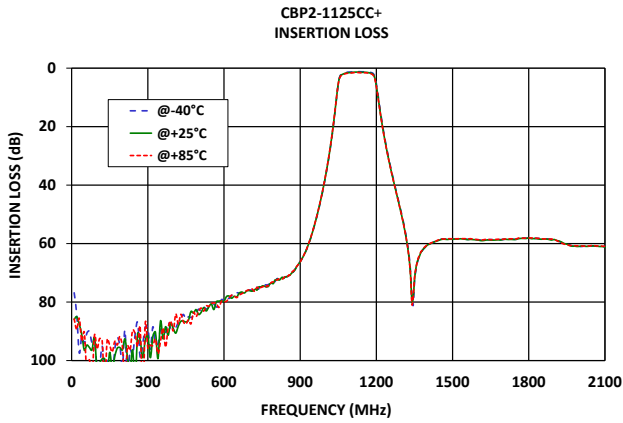



Bandpass Filter

FUNCTIONAL DIAGRAM

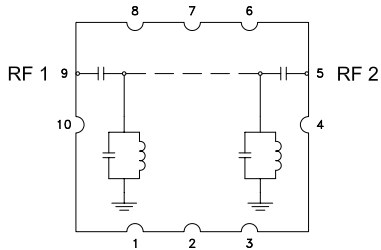



Figure 1. CBP2-1125CC+ Functional Diagram

PAD DESCRIPTION

Function	Pad Number	Description
RF1 ²	9	Connects to RF Input Port
RF2 ²	5	Connects to RF Output Port
GROUND	1-4, 6-8, 10	Connects to Ground on PCB, (See drawing PL-794)
NC	-	No connection, not used internally. See drawing PL-794 for connection to PCB

SUGGESTED PCB LAYOUT (PL-794)

SUGGESTED MOUNTING CONFIGURATION FOR CASE STYLE BAH3507

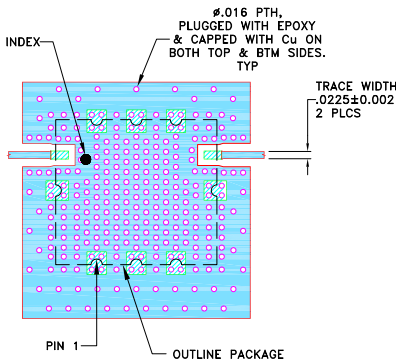


NOTES:

- TRACE WIDTH ARE SHOWN FOR ROGERS (R04350B) WITH DIELECTRIC THICKNESS .010±.001 COPPER: 1/2 Oz. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED
 - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER PATTERN WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 - DENOTES PCB COPPER PATTERN FREE OF SOLDERMASK

Figure 2. Suggested PCB Layout PL-794

CASE STYLE DRAWING

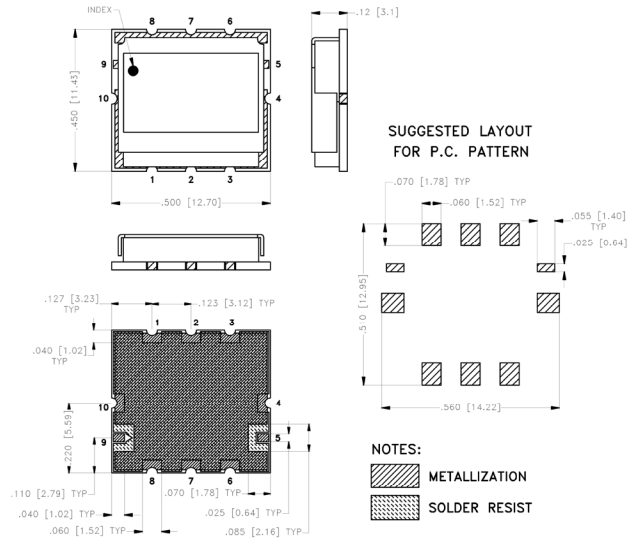

Weight: 1 gram

Dimensions are in inches (mm). Tolerances: 2Pl. ± .03; 3Pl. ± .015

PRODUCT MARKING*: CBP2-1125CC

*Marking may contain other features or characters for internal lot control.



(CERAMIC RESONATOR) SURFACE MOUNT

Bandpass Filter

CBP2-1125CC+

Mini-Circuits

50Ω

1085 to 1165 MHz

ADDITIONAL DETAILED INFORMATION IS AVAILABLE ON OUR DASHBOARD.

[CLICK HERE](#)

Performance Data and Graphs	Data
	Graphs
	S-Parameter (S2P Files) Data Set (.zip file) De-embedded to device pads
Case Style	BAH3507 Lead Finish: Electroless Nickel Immersion Gold
RoHS Status	Compliant
Tape and Reel	TR-F014
Suggested Layout for PCB Design	PL-794
Evaluation Board	TB-CBP2-1125CC+
	Gerber File
Environmental Rating	ENV54

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[CBP2-1125CC+](#)