
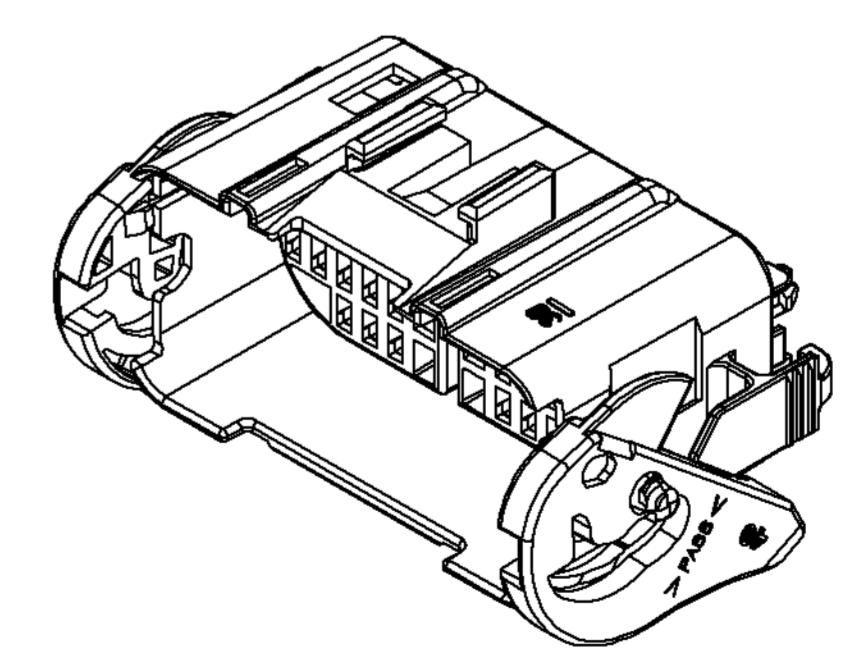
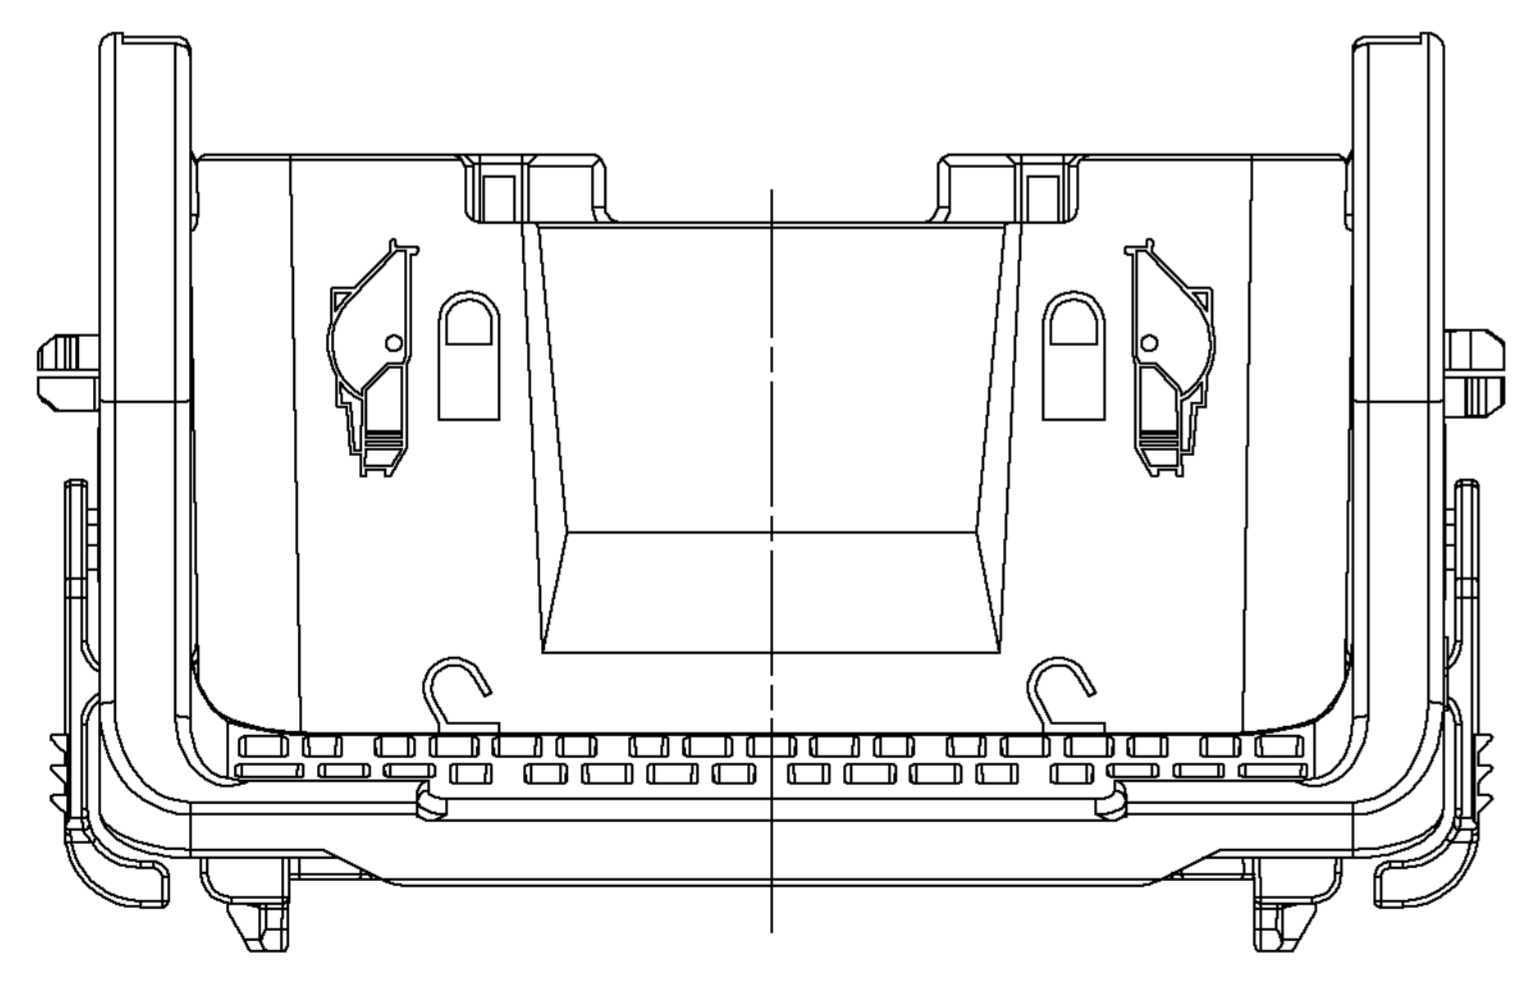
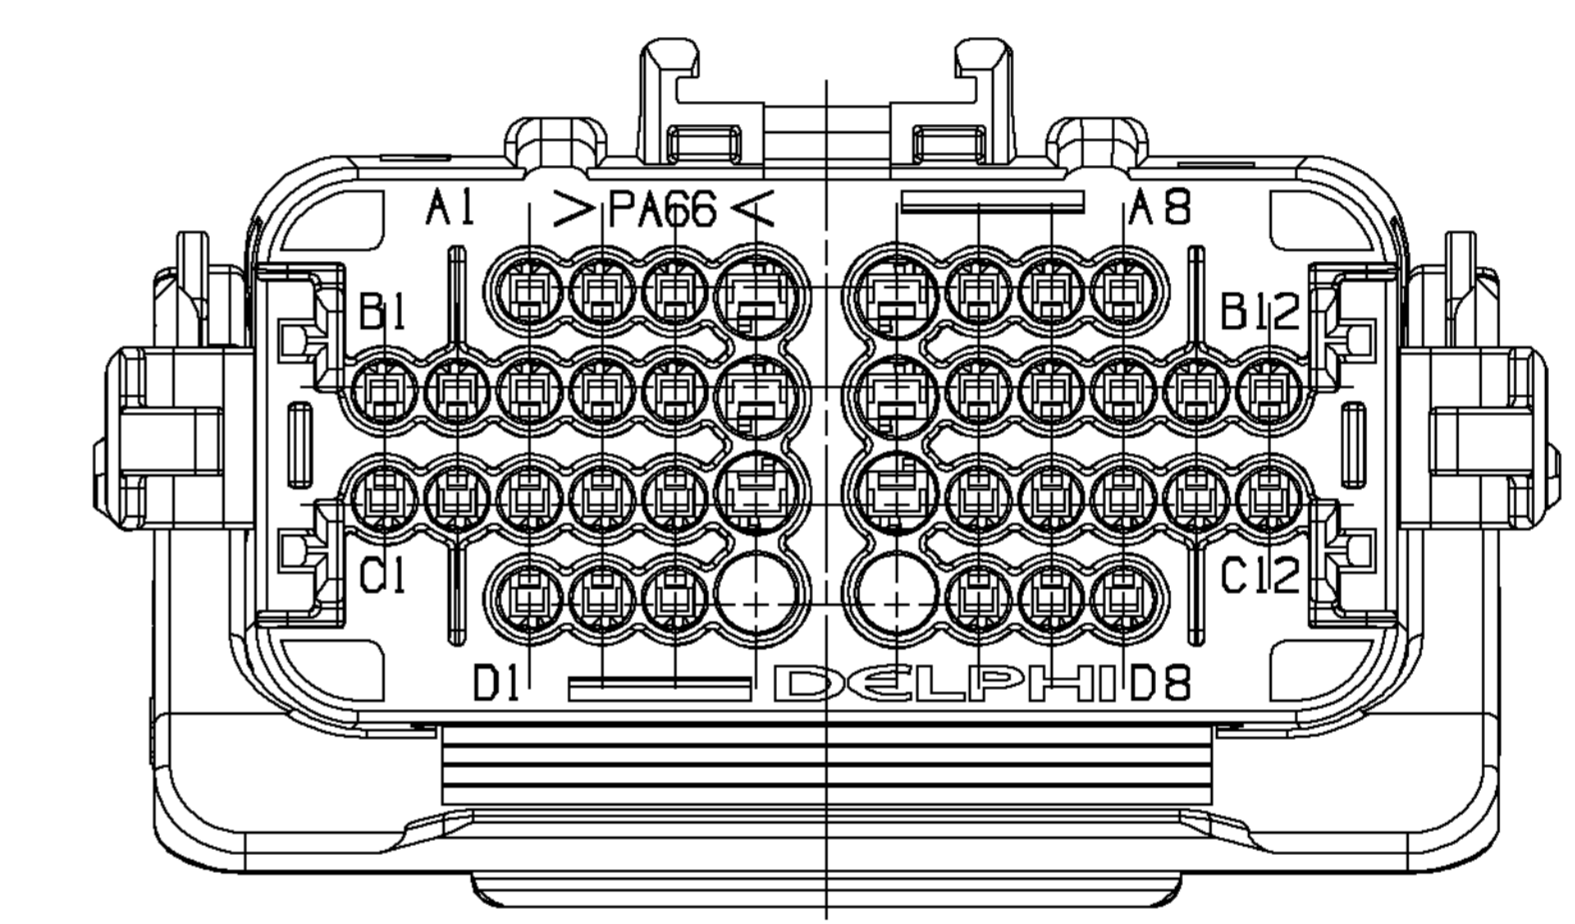
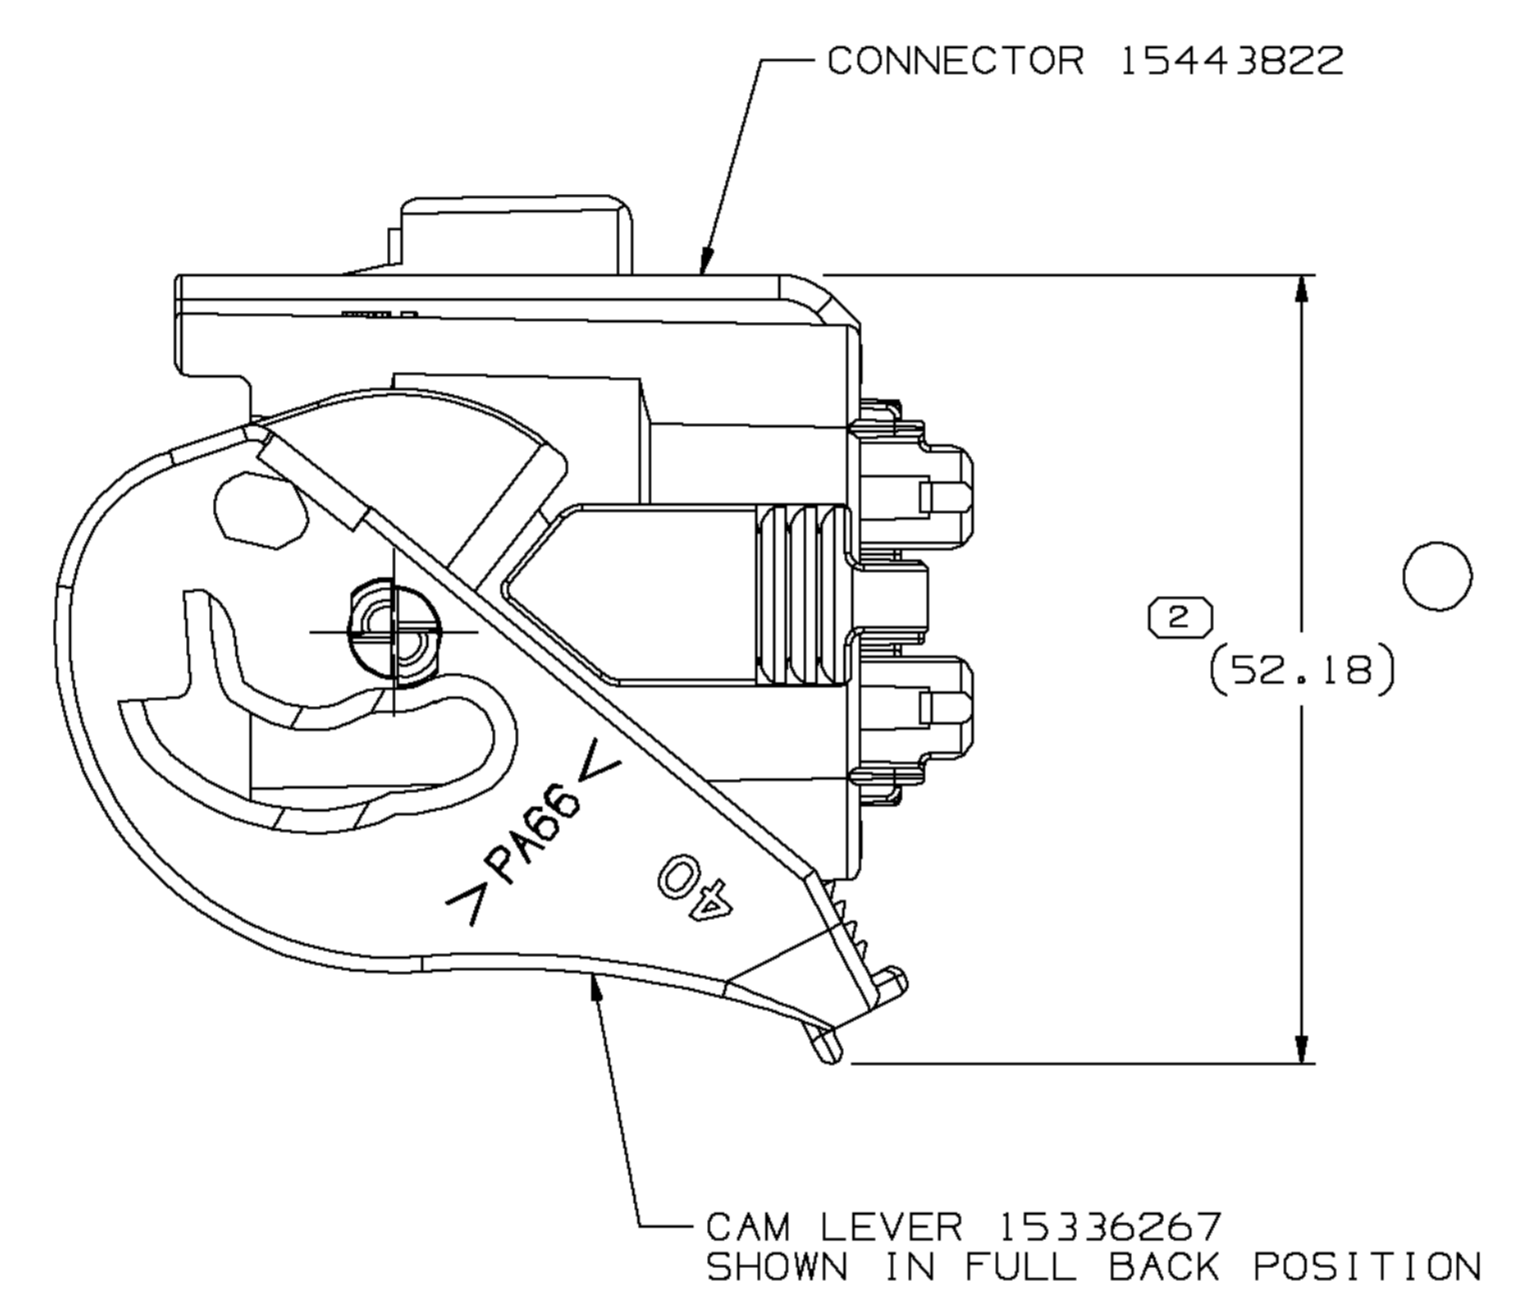
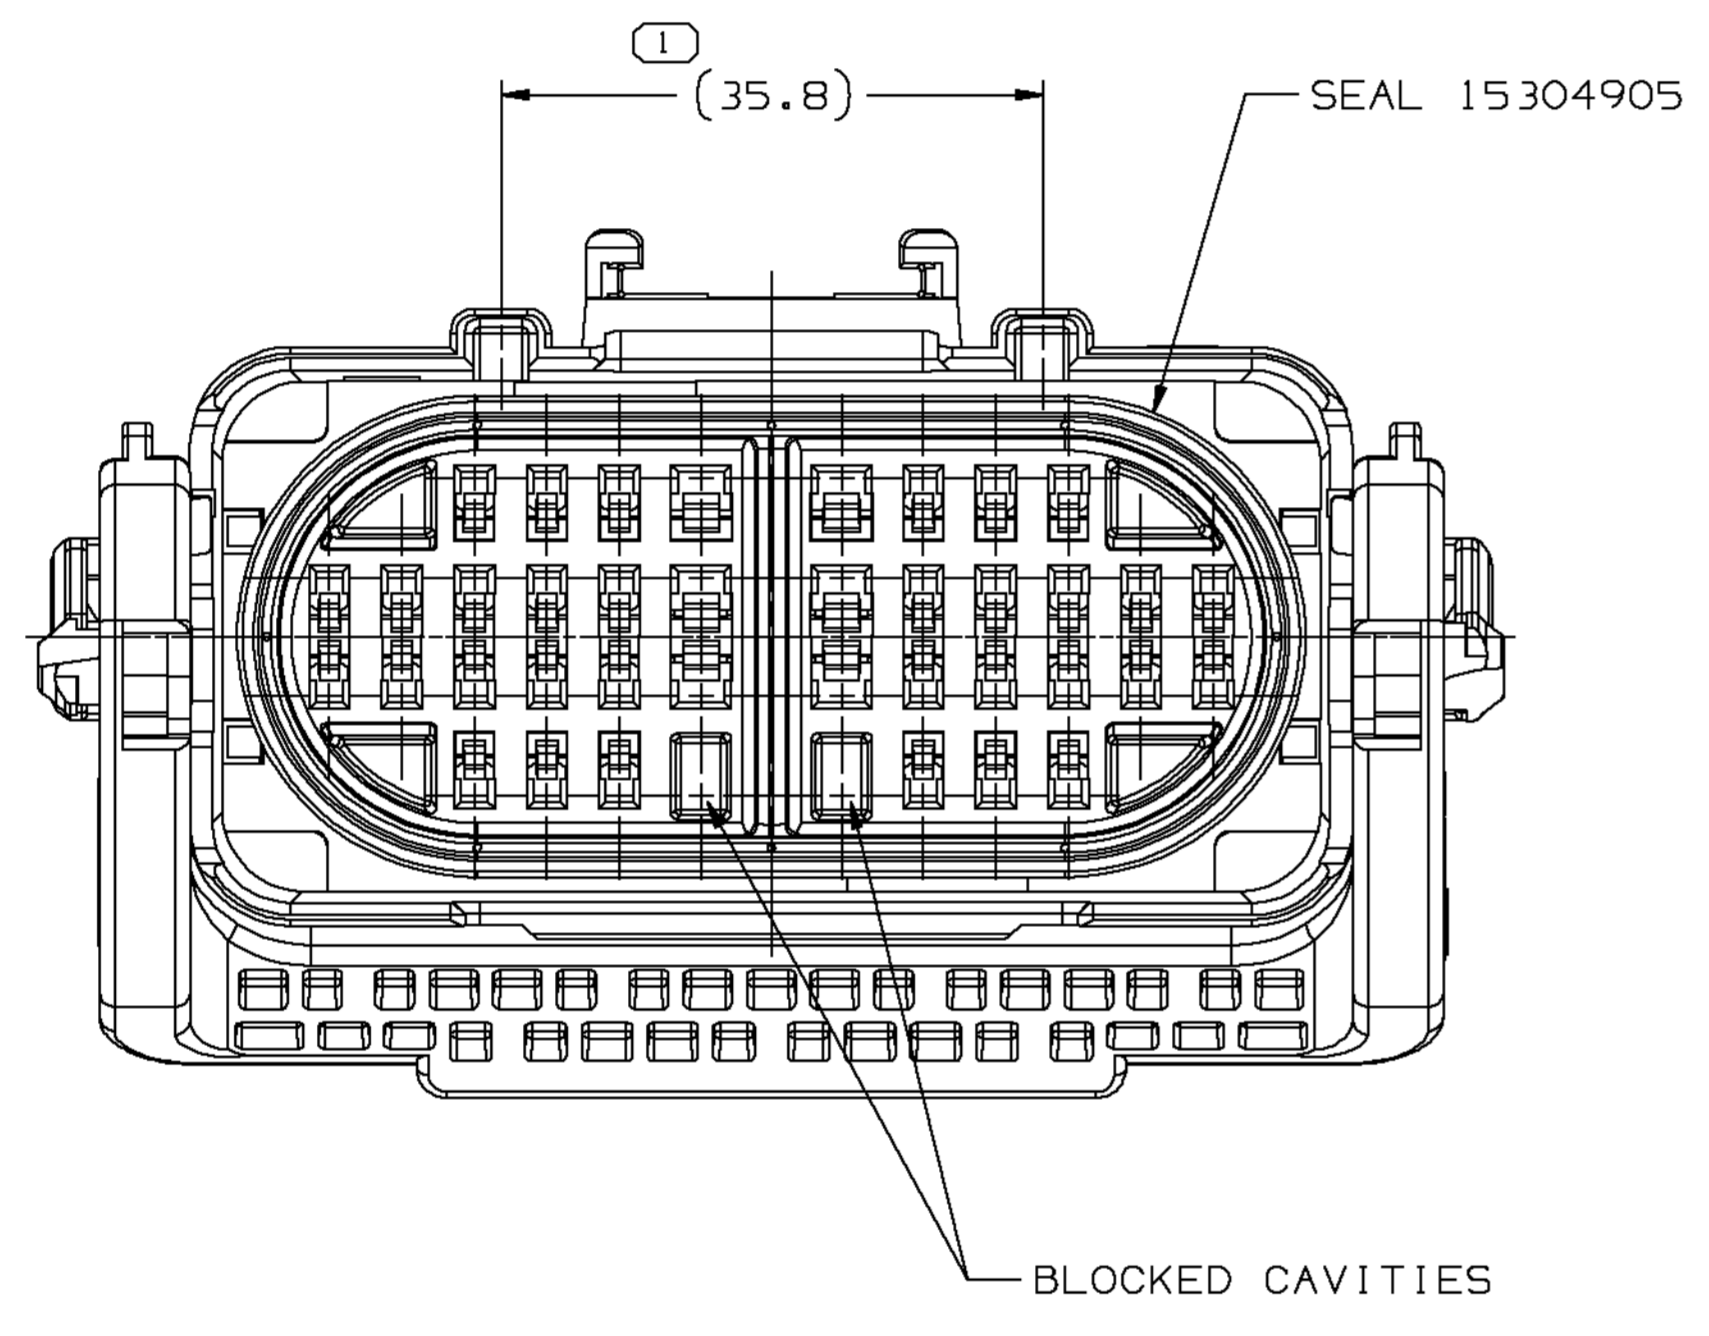
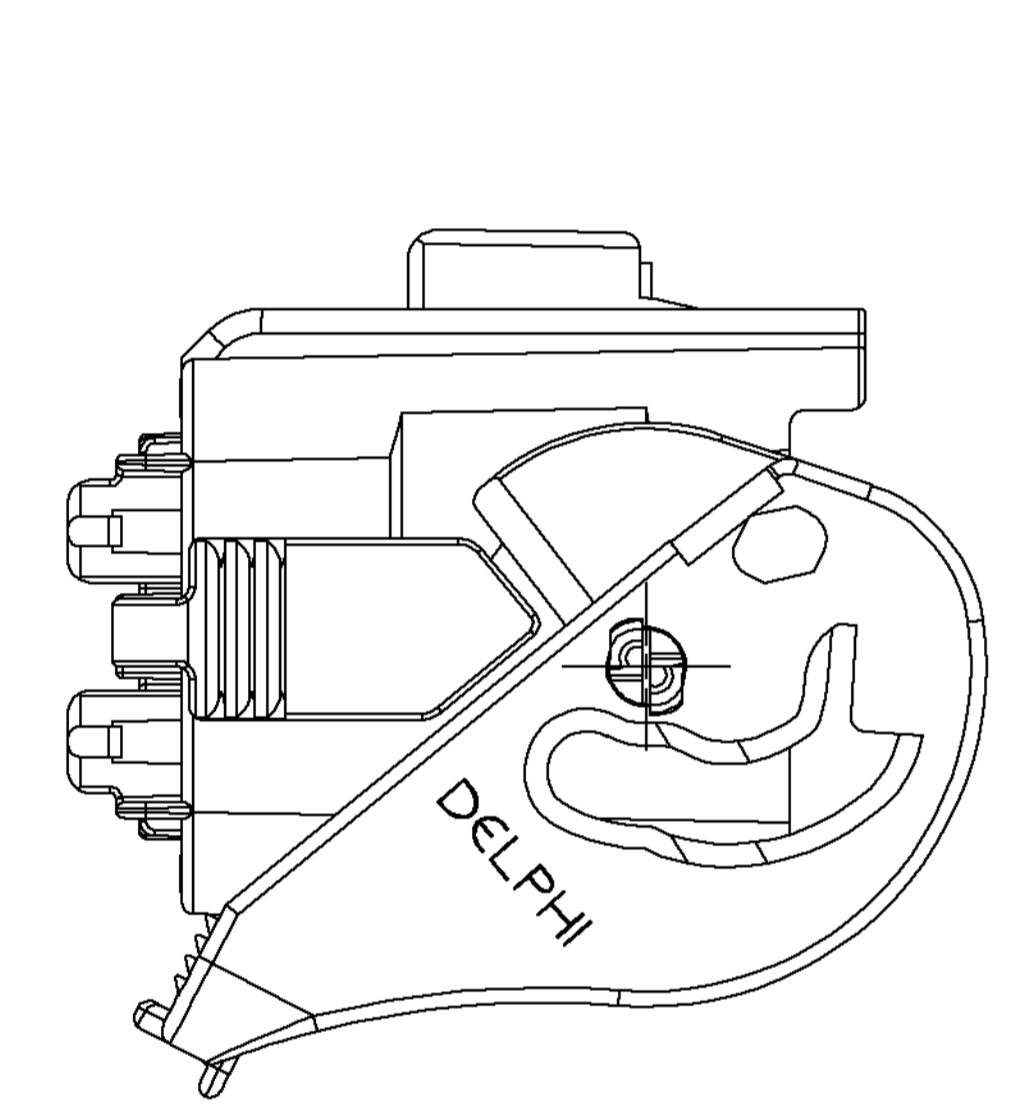



SYMBOL DEFINITION	
A DIMENSION WITHOUT AN INSPECTION REPORT SYMBOL DOES NOT REQUIRE INSPECTION. IT MAY BE CONTROLLED ON THE INDIVIDUAL COMPONENT DRAWING.	TOTAL NO OF INSPECTIONS REQUIRED
	2
	LAST NO. USED
	2

DWG STATUS						REVISION HISTORY			AUTH	DR	APVD	APVD
DATE	STG	REV	W/P	CHG	ZONE							
25SE02	R	01	-	-		RELEASED		230734	AMG	AMG	JAS	
04MR03	R	02	-	-		CONNECTOR WAS 15336418, 52.18 +3/-0 WAS 51.24 +3/-0, REVISED NOTE 5		237449	EES	EES	MP	
24AP03	R	02	AA	-		DIM WAS 52.18 +3/-0		240029	MAC	MAC	MP	

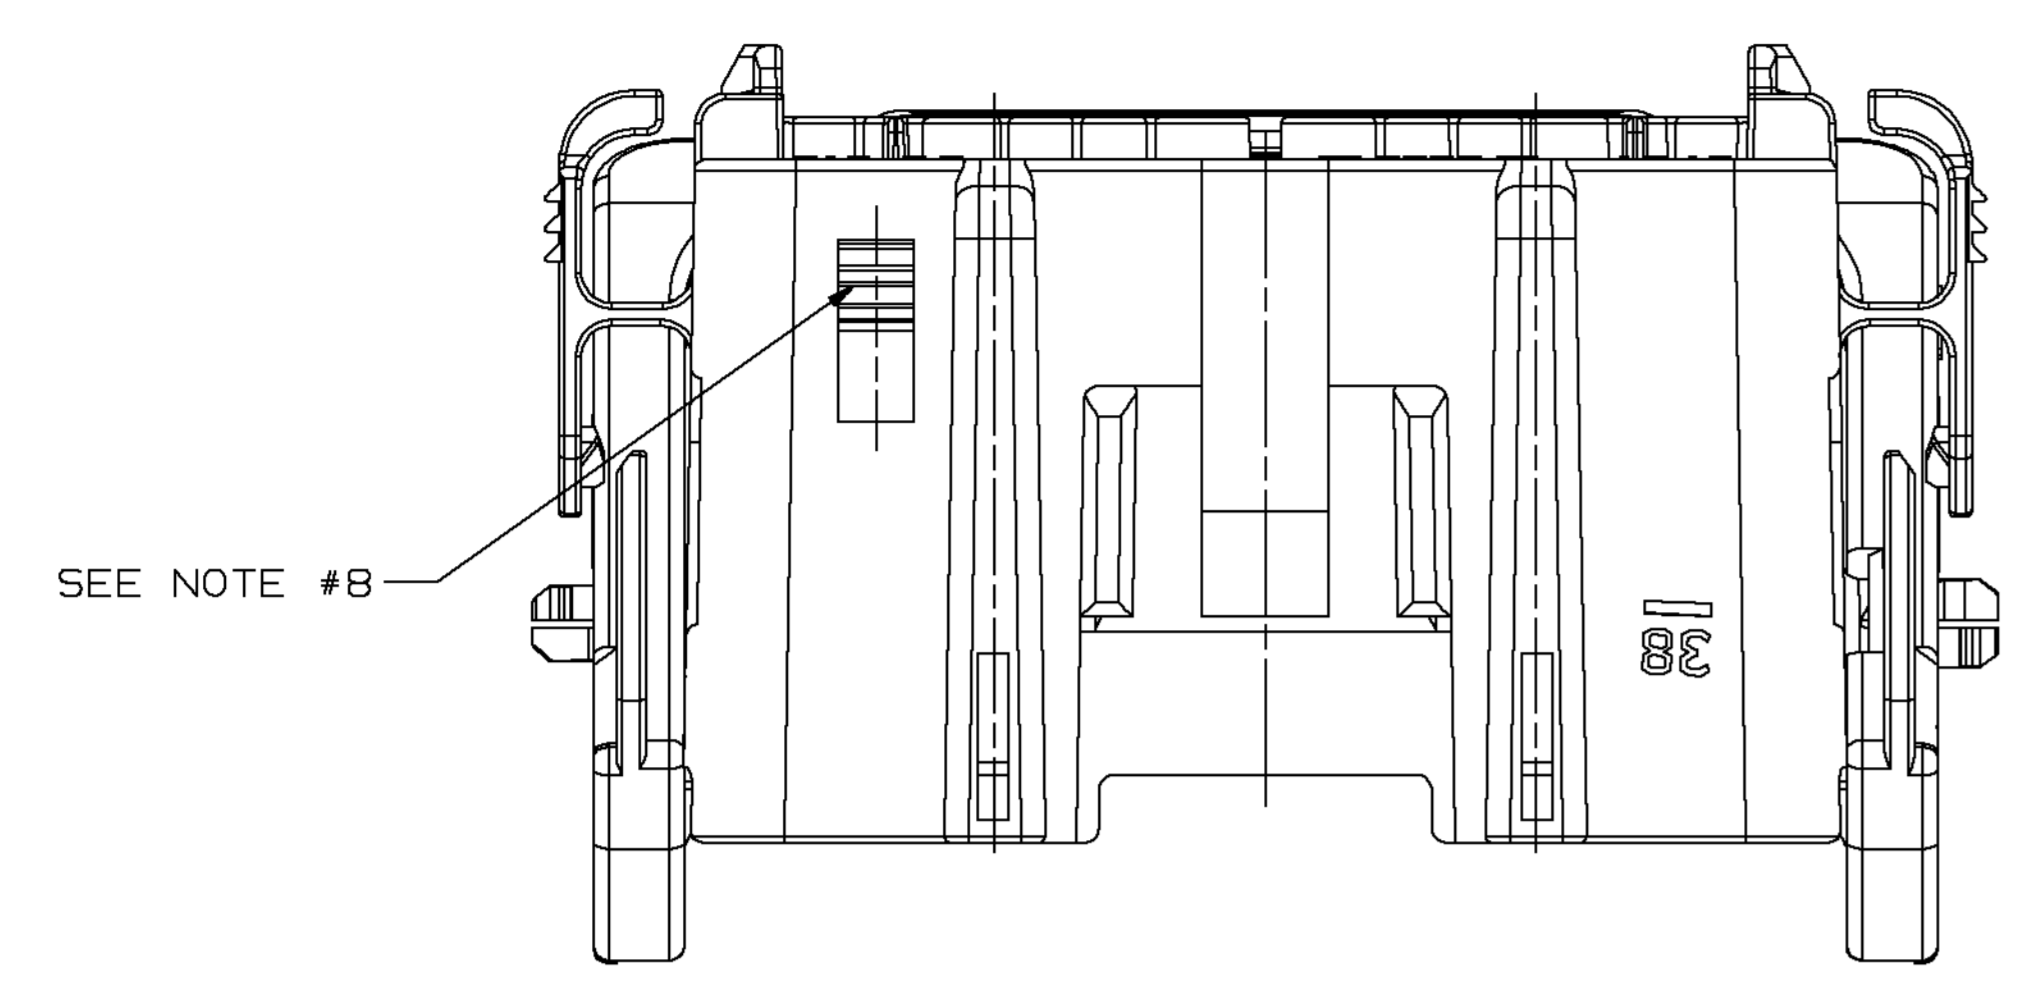

NOTES

- UNLESS OTHERWISE SPECIFIED AND/OR INDICATED: DIMENSIONS ARE TO FACE OF VIEW SHOWN AND AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION. (SEE MATH MODEL FOR PRECISE DIMENSIONS.) FOR ALL OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA.
- SEALING CODE 2 - DESIGN WILL PASS SALT FOG TEST AFTER CONDITIONING AS SPECIFIED IN ESA-644 (WEATHER-PACK), ESA-710 (METRIC-PACK), ESA-650 (UNDERHOOD MICRO-PACK), C-4006 (WORLD CONNECTOR), ETC WHEN MATED TO MATING PART OR EQUIVALENT.
- THIS PART IS NOT CONTROLLED FOR AUTOMATIC FEEDING.
- MATING COMPONENTS OR EQUIVALENT: ASM CONN 15448397
- THIS PART ACCEPTS THE FOLLOWING COMPONENTS OR EQUIVALENT:
 - CONNECTOR SEAL 15304905
 - TERMINAL 12191818 & 15304716
 - GT150 CAVITIES A1-A3, A6-A8, B1-B5, B8-B12, C1-C5, C8-C12 & D1-D3, D6-D8 TO ACCEPT 12191818.
 - GT150 CABLE SEAL 12191226 (Ø4 SEAL CAVITIES)
 - GT280 CAVITIES A4, A5, B6, B7, C6, C7 & D4, D5 TO ACCEPT 15304716.
 - GT280 CABLE SEAL 12191231 (Ø5.2 SEAL CAVITIES)
 - SECONDARY TERMINAL LOCK 15304904
 - LEVER 15336267
 - CLIP SLOT ACCEPTS CONNECTOR CLIP 12129271 OR TYPICAL BRACKETS SHOWN ON RELAY ASSEMBLY TAXI 12135006
- TO BE USED WITH APPROPRIATE DELPHI PACKARD ELECTRIC SYSTEMS DESIGNED HOLDERS.
- TO BE PROCESSED USING DELPHI PACKARD ELECTRIC SYSTEMS BEST PRACTICE METHOD OR CUSTOMER ASSEMBLY INSTRUCTIONS.
- CONNECTOR SEAL SHOULD BE VISIBLE IN LOWER HALF OF WINDOW.
- (2.3)(X)(0.1) RAISED DELPHI CORPORATE BRAND TO BE LOCATED ON ANY EXTERIOR SURFACE, PREFERABLY VISIBLE AT FINAL ASSEMBLY. OPTIONAL CONSTRUCTION TO BE "PED" OR NO LOGO.

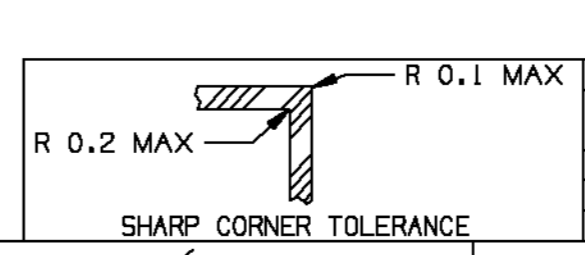

DIMENSIONAL RANGE (MM)	CHART ET
FROM > 0	> 30
> 30	> 70
> 70	> 100
> 100	> 150
> 150	> 200
> 200	> 250
> 250	> 300
> 300	> 400

THIRD ANGLE PROJECTION	DO NOT SCALE
USE MATH DATA	UNIMAGES

DELPHI
 DELPHI PACKARD ELECTRIC SYSTEMS
 WARREN, OH

DR	DATE
APVD1 ANDRES MENDEZ	25SE02
APVD2 ANDRES MENDEZ	25SE02
APVD3 J. SVETTE	30SE02
APVD4	
APVD5	

UNLESS OTHERWISE SPECIFIED
 THIS DOCUMENT IS IN ACCORDANCE WITH ASME Y14.5M-1994 AS AMENDED BY THE 2009 DIMENSIONING AND TOLERANCING ADDENDUM - 1997. ALL GEOMETRIC TOLERANCES AND RELATED SURFACE APPLICABLE. ALL DIMENSIONS UNLESS OTHERWISE SPECIFIED ARE IN MILLIMETERS.
 UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN MILLIMETERS.

DRAWING NUMBER: 15441988

SIZE: A0 SCALE: 2:1 FRAME NO: 1 OF 1 SHEET NO: 1 OF 1 REV: N/A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Aptiv:](#)

[15441988](#)