

# Phase Shifter

50Ω 180° Voltage Variable 36 to 54 MHz

## JSPHS-51+



Generic photo used for illustration purposes only

CASE STYLE: BK276

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### Maximum Ratings

|                       |                |
|-----------------------|----------------|
| Operating Temperature | -40°C to 85°C  |
| Storage Temperature   | -55°C to 100°C |
| RF Input Power        | 20 dBm max.    |
| Control Voltage       | 18V            |


Permanent damage may occur if any of these limits are exceeded.

### Pin Connections

|        |                           |
|--------|---------------------------|
| IN     | 1                         |
| OUT    | 7                         |
| BIAS   | 4,6^                      |
| GROUND | 2,3,,5,8,9,10,11,12,13,14 |

^ proper operation is achieved with pins 4 or 6 or both connected to BIAS.

### Outline Drawing

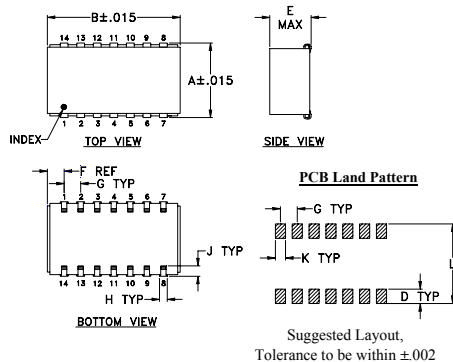


### Outline Dimensions (inch mm)

| A     | B     | C  | D    | E    | F    | G    |
|-------|-------|----|------|------|------|------|
| .450  | .803  | -- | .100 | .250 | .102 | .100 |
| 11.43 | 20.40 | -- | 2.54 | 6.35 | 2.59 | 2.54 |

| H    | J    | K    | L     | wt    |
|------|------|------|-------|-------|
| .047 | .065 | .065 | .470  | grams |
| 1.19 | 1.65 | 1.65 | 11.94 | 3.0   |

### Demo Board MCL P/N: TB-122+ Suggested PCB Layout (PL-030)

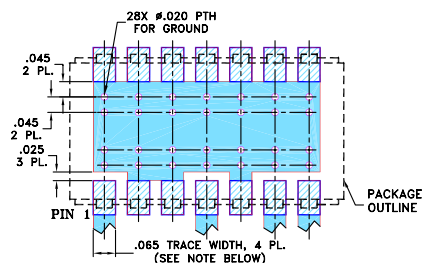

NOTE: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.030" ± 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

#### Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

### Features

- low insertion loss, 1.2 dB typ.
- good VSWR, 1.3 typ.
- solder-plated J-leads for excellent solderability and strain relief
- aqueous washable

### Applications

- IF signal processing

### Phase Shifter Electrical Specifications




| FREQUENCY (MHz) | PHASE RANGE (Degrees) | INSERTION LOSS (dB) | CONTROL VOLTAGE (V) | CONTROL BANDWIDTH (kHz) | VSWR (:1) |
|-----------------|-----------------------|---------------------|---------------------|-------------------------|-----------|
|                 | Min.                  | Typ. Max.           |                     | Typ.                    | Typ. Max. |
| 36-54           | 180                   | 1.2 2.5             | 0-12                | DC-50                   | 1.2 1.8   |

Maximum operating power, 0 dBm  
DC input resistance at Control port: 9.3k ohms typ.


### Typical Performance Data

| Control Voltage (V) | Phase Shift* (Degrees) |        |        | VSWR (:1) |        |        | Insertion Loss (dB) |        |        |
|---------------------|------------------------|--------|--------|-----------|--------|--------|---------------------|--------|--------|
|                     | 36 MHz                 | 45 MHz | 54 MHz | 36 MHz    | 45 MHz | 54 MHz | 36 MHz              | 46 MHz | 54 MHz |
| 0.0                 | 0.00                   | 0.00   | 0.00   | 1.27      | 1.02   | 1.08   | 1.26                | 0.82   | 0.67   |
| 1.0                 | 18.04                  | 7.16   | 3.25   | 1.29      | 1.02   | 1.08   | 1.40                | 0.89   | 0.70   |
| 3.0                 | 62.86                  | 26.70  | 11.66  | 1.39      | 1.04   | 1.10   | 1.58                | 1.09   | 0.79   |
| 5.0                 | 113.34                 | 59.95  | 25.08  | 1.54      | 1.03   | 1.13   | 1.46                | 1.39   | 0.94   |
| 7.0                 | 155.95                 | 118.73 | 51.60  | 1.63      | 1.06   | 1.17   | 1.13                | 1.56   | 1.25   |
| 9.0                 | 185.56                 | 188.68 | 116.21 | 1.63      | 1.22   | 1.15   | 0.87                | 1.12   | 1.75   |
| 10.0                | 196.22                 | 214.66 | 168.00 | 1.62      | 1.25   | 1.08   | 0.79                | 0.87   | 1.62   |
| 12.0                | 211.20                 | 246.54 | 244.09 | 1.58      | 1.25   | 1.09   | 0.71                | 0.59   | 0.82   |
| 14.0                | 219.23                 | 260.98 | 272.59 | 1.56      | 1.23   | 1.08   | 0.63                | 0.50   | 0.55   |
| 15.0                | 221.44                 | 264.40 | 278.57 | 1.56      | 1.22   | 1.08   | 0.61                | 0.48   | 0.51   |

\* Normalized at control voltage = 0V

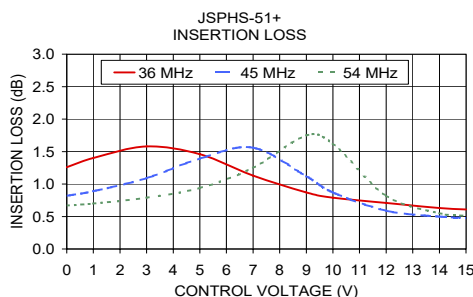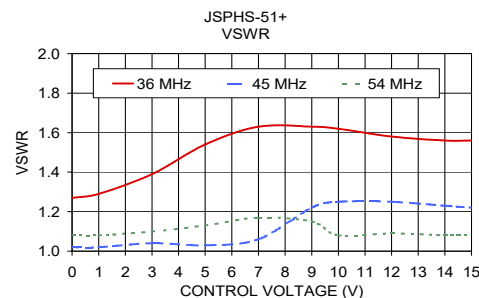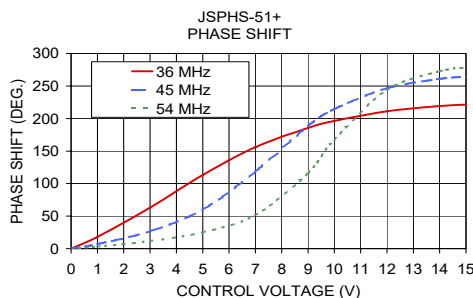

### electrical schematic



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[JSPHS-51+](#)