


Midi-Contactors

Auxiliary contacts/contact blocks characteristics

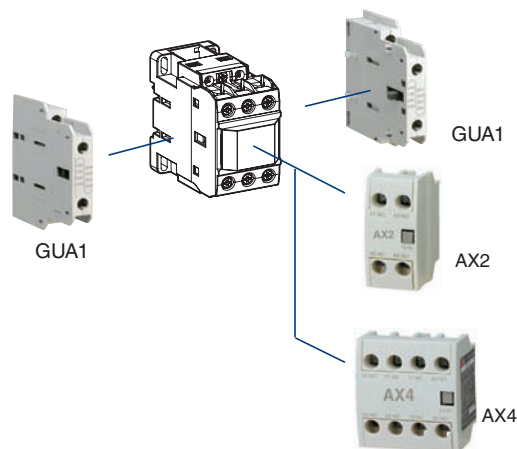


Contactor frame	
Contactor types	
Number of auxiliary contact	
Normally open	[EA]
Normally closed	[EA]
Auxiliary contact blocks, optional	
Type	
Number of auxiliary contact	
Normally open	[EA]
Normally closed	[EA]
Characteristics	
Rated operational voltage, Ue [V]	
Rated insulation voltage, Ui	
Conforming to IEC 947-1	[V]
Conforming to UL, CSA	[V]
Operating current frequency [Hz]	
Short-circuit protection	
Minimum switching capacity	
U min. DC	[V]
I min.	[mA]
Thermal current, Ith [A]	
Operational current	
AC15 duty (A600)	120V [A]
	240V [A]
	380V [A]
	480V [A]
	600V [A]
DC13 duty (P600)	125V [A]
	250V [A]
	440V [A]
	500V [A]
	600V [A]
Lifetime (mil.operations)	
AC15 duty	220V
	440V
DC13 duty	220V
	440V
Operation cycles per hour	

		12AF	32AF	63AF	95AF					
		GC 9 GC12	GC18 GC25 GC32	GC35 GC40 GC50 GC63	GC65 GC75 GC85 GC95					
		1 (standard) or 1 (optional)	1 1	2 2	2 2					
		AX2		AX4						
		2	1	0	4	3	2	1	0	GUA1
		0	1	2	0	1	2	3	4	1
		690								
		600								
		1000V								
		25~400								
		gLgG fuse: 16A (conforming to IEC EN947-5-1)								
				24			17			
				10			5			
		16								
		6								
		3								
		1.9								
		1.5								
		1.2								
		1.1								
		0.55								
		0.31								
		0.27								
		0.2								
		0.5								
		0.5								
		0.5								
		0.5								
		1800								

Accessories

Auxiliary contact blocks

for contactors and reversing contactors

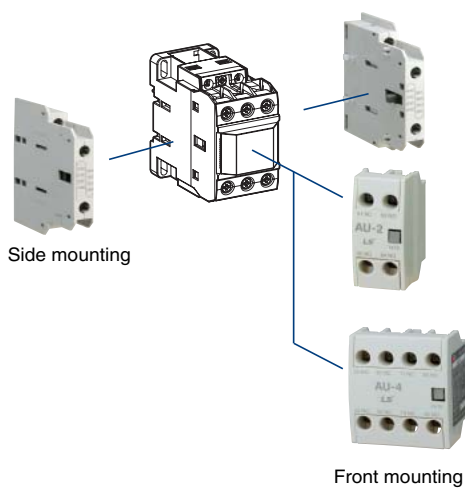

Using contactors	Mounting	Number of contacts per block	Composition		Type	Weight
			NO	NC		g
Contactors and reversing contactors GC9 ~ 95 GC9R ~ 95R	Front	2	1	1	AX2	28
			2	-		
	Side	4	2	2	AX4	50
			1	3		
4			-			
3	1	GUA1	53			



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Carlo Gavazzi:](#)

[GUA4-31](#) [GUA4-40](#) [GUA4-04](#) [GUA4-22](#) [GUA4-13](#) [GUA2-20](#) [GUA1](#) [GUA2-02](#) [GUA2-11](#)