## **SIEMENS**

Data sheet 3RT1466-6AM36



power contactor AC-1 400 A / 690 V / 40  $^{\circ}$ C 3-pole, Uc: 200-220 V AC(50-60 Hz) / DC drive: conventional auxiliary contacts 2 NO + 2 NC main circuit: busbar control and auxiliary circuit: screw terminal

product brand name	SIRIUS
product designation	Contactor
product type designation	3RT14
General technical data	
size of contactor	S10
product extension	
<ul> <li>function module for communication</li> </ul>	No
auxiliary switch	Yes
power loss [W] for rated value of the current	
<ul> <li>at AC in hot operating state</li> </ul>	105.6 W
<ul> <li>at AC in hot operating state per pole</li> </ul>	35.2 W
<ul> <li>without load current share typical</li> </ul>	7.4 W
insulation voltage	
• of main circuit with degree of pollution 3 rated value	1 000 V
• of auxiliary circuit with degree of pollution 3 rated value	500 V
surge voltage resistance	
<ul> <li>of main circuit rated value</li> </ul>	8 kV
of auxiliary circuit rated value	6 kV
shock resistance at rectangular impulse	
• at AC	8,5g / 5 ms, 4,2g / 10 ms
• at DC	8,5g / 5 ms, 4,2g / 10 ms
shock resistance with sine pulse	
• at AC	13,4g / 5 ms, 6,5g / 10 ms
• at DC	13,4g / 5 ms, 6,5g / 10 ms
mechanical service life (operating cycles)	
of contactor typical	10 000 000
<ul> <li>of the contactor with added electronically optimized auxiliary switch block typical</li> </ul>	5 000 000
• of the contactor with added auxiliary switch block typical	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	05/01/2012
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
during operation	-25 +60 °C
during storage	-55 +80 °C
relative humidity minimum	10 %
relative humidity at 55 $^{\circ}\text{C}$ according to IEC 60068-2-30 maximum	95 %
Main circuit	
number of poles for main current circuit	3

number of NO contacts for main contacts	3
number of NC contacts for main contacts	0
type of voltage for main current circuit	AC
operational current	
• at AC-1	
— up to 690 V at ambient temperature 40 $^{\circ}\text{C}$ rated value	400 A
— up to 690 V at ambient temperature 55 $^{\circ}\text{C}$ rated value	380 A
— up to 690 V at ambient temperature 60 $^{\circ}\text{C}$ rated value	380 A
• at AC-3	
— at 400 V rated value	138 A
— at 690 V rated value	138 A
minimum cross-section in main circuit at maximum AC-1 rated value	240 mm²
no-load switching frequency	
• at AC	2 000 1/h
• at DC	2 000 1/h
operating frequency at AC-1 maximum	600 1/h
Control circuit/ Control	
type of voltage	AC/DC
type of voltage type of voltage of the control supply voltage	AC/DC
control supply voltage at AC	
at 50 Hz rated value	200 220 V
	200 220 V 200 220 V
at 60 Hz rated value	200 220 V
control supply voltage at DC	
rated value	200 220 V
operating range factor control supply voltage rated value of magnet coil at DC	
• initial value	0.8
full-scale value	1.1
operating range factor control supply voltage rated value of magnet coil at AC	
● at 50 Hz	0.8 1.1
• at 60 Hz	0.8 1.1
design of the surge suppressor	with varistor
apparent pick-up power	
<ul> <li>at minimum rated control supply voltage at AC</li> </ul>	
— at 50 Hz	490 VA
— at 60 Hz	490 VA
<ul> <li>at maximum rated control supply voltage at AC</li> </ul>	
— at 60 Hz	590 VA
— at 50 Hz	590 VA
apparent pick-up power of magnet coil at AC	
• at 50 Hz	590 VA
inductive power factor with closing power of the coil	
• at 50 Hz	0.9
apparent holding power	
at minimum rated control supply voltage at DC	6.1 VA
at maximum rated control supply voltage at DC	7.4 VA
apparent holding power	
at minimum rated control supply voltage at AC	
— at 50 Hz	5.6 VA
— at 60 Hz	5.6 VA
	0.0 VA
at maximum rated control supply voltage at AC	C 7 VA
— at 50 Hz	6.7 VA
— at 60 Hz	6.7 VA
apparent holding power of magnet coil at AC	0.714
• at 50 Hz	6.7 VA
inductive power factor with the holding power of the coil	
● at 50 Hz	0.9

closing power of magnet coil at DC	650 W
holding power of magnet coil at DC	7.4 W
closing delay	
• at AC	30 95 ms
• at DC	30 95 ms
opening delay	
• at AC	40 80 ms
• at DC	40 80 ms
arcing time	10 15 ms
control version of the switch operating mechanism	Standard A1 - A2
Auxiliary circuit	
number of NC contacts for auxiliary contacts	2
attachable	4
• instantaneous contact	2
number of NO contacts for auxiliary contacts	2
attachable	4
instantaneous contact	2
operational current at AC-12 maximum	10 A
operational current at AC-15	
at 230 V rated value	6 A
at 400 V rated value	3 A
at 500 V rated value	2 A
at 690 V rated value     at 690 V rated value	1A
operational current at DC-13	1 A
at 24 V rated value	10 A
at 48 V rated value     at 48 V rated value	2 A
• at 60 V rated value	2 A
at 110 V rated value	1 A
at 125 V rated value	0.9 A
at 220 V rated value	0.3 A
• at 600 V rated value	0.1 A
at 600 V rated value  design of the miniature circuit breaker for short-circuit protection of the auxiliary switch required  contact reliability of auxiliary contacts	0.1 A
at 600 V rated value  design of the miniature circuit breaker for short-circuit protection of the auxiliary switch required	0.1 A gG: 10 A (230 V, 400 A)
at 600 V rated value  design of the miniature circuit breaker for short-circuit protection of the auxiliary switch required  contact reliability of auxiliary contacts	0.1 A gG: 10 A (230 V, 400 A)
at 600 V rated value  design of the miniature circuit breaker for short-circuit protection of the auxiliary switch required  contact reliability of auxiliary contacts  Short-circuit protection	0.1 A gG: 10 A (230 V, 400 A)  1 faulty switching per 100 million (17 V, 1 mA)
at 600 V rated value  design of the miniature circuit breaker for short-circuit protection of the auxiliary switch required  contact reliability of auxiliary contacts  Short-circuit protection  product function short circuit protection	0.1 A gG: 10 A (230 V, 400 A)  1 faulty switching per 100 million (17 V, 1 mA)
at 600 V rated value  design of the miniature circuit breaker for short-circuit protection of the auxiliary switch required  contact reliability of auxiliary contacts  Short-circuit protection  product function short circuit protection  design of the fuse link	0.1 A gG: 10 A (230 V, 400 A)  1 faulty switching per 100 million (17 V, 1 mA)
at 600 V rated value  design of the miniature circuit breaker for short-circuit protection of the auxiliary switch required  contact reliability of auxiliary contacts  Short-circuit protection  product function short circuit protection  design of the fuse link  • for short-circuit protection of the main circuit	0.1 A gG: 10 A (230 V, 400 A)  1 faulty switching per 100 million (17 V, 1 mA)
at 600 V rated value  design of the miniature circuit breaker for short-circuit protection of the auxiliary switch required  contact reliability of auxiliary contacts  Short-circuit protection  product function short circuit protection  design of the fuse link  for short-circuit protection of the main circuit  with type of coordination 1 required	0.1 A gG: 10 A (230 V, 400 A)  1 faulty switching per 100 million (17 V, 1 mA)  No  gG: 500 A (690 V, 100 kA)
at 600 V rated value  design of the miniature circuit breaker for short-circuit protection of the auxiliary switch required  contact reliability of auxiliary contacts  Short-circuit protection  product function short circuit protection  design of the fuse link  for short-circuit protection of the main circuit  with type of coordination 1 required  with type of assignment 2 required	0.1 A gG: 10 A (230 V, 400 A)  1 faulty switching per 100 million (17 V, 1 mA)  No  gG: 500 A (690 V, 100 kA) gR: 500 A (690 V, 100 kA)
at 600 V rated value  design of the miniature circuit breaker for short-circuit protection of the auxiliary switch required  contact reliability of auxiliary contacts  Short-circuit protection  product function short circuit protection  design of the fuse link      for short-circuit protection of the main circuit      with type of coordination 1 required      with type of assignment 2 required      for short-circuit protection of the auxiliary switch required	0.1 A gG: 10 A (230 V, 400 A)  1 faulty switching per 100 million (17 V, 1 mA)  No  gG: 500 A (690 V, 100 kA) gR: 500 A (690 V, 100 kA)
at 600 V rated value  design of the miniature circuit breaker for short-circuit protection of the auxiliary switch required  contact reliability of auxiliary contacts  Short-circuit protection  product function short circuit protection  design of the fuse link  for short-circuit protection of the main circuit  with type of coordination 1 required  with type of assignment 2 required  for short-circuit protection of the auxiliary switch required linstallation/ mounting/ dimensions	0.1 A gG: 10 A (230 V, 400 A)  1 faulty switching per 100 million (17 V, 1 mA)  No  gG: 500 A (690 V, 100 kA) gR: 500 A (690 V, 100 kA) gG: 10 A (500 V, 1 kA)  with vertical mounting surface +/-90° rotatable, with vertical mounting surface
at 600 V rated value  design of the miniature circuit breaker for short-circuit protection of the auxiliary switch required  contact reliability of auxiliary contacts  Short-circuit protection  product function short circuit protection  design of the fuse link      • for short-circuit protection of the main circuit      — with type of coordination 1 required      — with type of assignment 2 required      • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions  mounting position	0.1 A gG: 10 A (230 V, 400 A)  1 faulty switching per 100 million (17 V, 1 mA)  No  gG: 500 A (690 V, 100 kA) gR: 500 A (690 V, 100 kA) gG: 10 A (500 V, 1 kA)  with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back
at 600 V rated value  design of the miniature circuit breaker for short-circuit protection of the auxiliary switch required  contact reliability of auxiliary contacts  Short-circuit protection  product function short circuit protection  design of the fuse link  for short-circuit protection of the main circuit  with type of coordination 1 required  with type of assignment 2 required  for short-circuit protection of the auxiliary switch required installation/ mounting/ dimensions  mounting position  fastening method	0.1 A gG: 10 A (230 V, 400 A)  1 faulty switching per 100 million (17 V, 1 mA)  No  GG: 500 A (690 V, 100 kA) gR: 500 A (690 V, 100 kA) gG: 10 A (500 V, 1 kA)  with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing
at 600 V rated value  design of the miniature circuit breaker for short-circuit protection of the auxiliary switch required  contact reliability of auxiliary contacts  Short-circuit protection  product function short circuit protection  design of the fuse link  for short-circuit protection of the main circuit  with type of coordination 1 required  with type of assignment 2 required  for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  side-by-side mounting	0.1 A gG: 10 A (230 V, 400 A)  1 faulty switching per 100 million (17 V, 1 mA)  No  gG: 500 A (690 V, 100 kA) gR: 500 A (690 V, 100 kA) gG: 10 A (500 V, 1 kA)  with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes
at 600 V rated value  design of the miniature circuit breaker for short-circuit protection of the auxiliary switch required  contact reliability of auxiliary contacts  Short-circuit protection  product function short circuit protection  design of the fuse link     • for short-circuit protection of the main circuit     — with type of coordination 1 required     — with type of assignment 2 required     • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method     • side-by-side mounting height	0.1 A gG: 10 A (230 V, 400 A)  1 faulty switching per 100 million (17 V, 1 mA)  No  QG: 500 A (690 V, 100 kA) gR: 500 A (690 V, 100 kA) gG: 10 A (500 V, 1 kA)  with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes 210 mm
at 600 V rated value  design of the miniature circuit breaker for short-circuit protection of the auxiliary switch required  contact reliability of auxiliary contacts  Short-circuit protection  product function short circuit protection  design of the fuse link      for short-circuit protection of the main circuit      with type of coordination 1 required      with type of assignment 2 required      for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method      side-by-side mounting  height  width	0.1 A gG: 10 A (230 V, 400 A)  1 faulty switching per 100 million (17 V, 1 mA)  No  gG: 500 A (690 V, 100 kA) gR: 500 A (690 V, 100 kA) gG: 10 A (500 V, 1 kA)  with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes 210 mm 145 mm
at 600 V rated value  design of the miniature circuit breaker for short-circuit protection of the auxiliary switch required  contact reliability of auxiliary contacts  Short-circuit protection  product function short circuit protection  design of the fuse link      • for short-circuit protection of the main circuit      — with type of coordination 1 required      — with type of assignment 2 required      • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method      • side-by-side mounting height  width depth	0.1 A gG: 10 A (230 V, 400 A)  1 faulty switching per 100 million (17 V, 1 mA)  No  gG: 500 A (690 V, 100 kA) gR: 500 A (690 V, 100 kA) gG: 10 A (500 V, 1 kA)  with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes 210 mm 145 mm
at 600 V rated value  design of the miniature circuit breaker for short-circuit protection of the auxiliary switch required  contact reliability of auxiliary contacts  Short-circuit protection  product function short circuit protection  design of the fuse link  for short-circuit protection of the main circuit  with type of coordination 1 required  with type of assignment 2 required  for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  side-by-side mounting  height  width  depth  required spacing	0.1 A gG: 10 A (230 V, 400 A)  1 faulty switching per 100 million (17 V, 1 mA)  No  gG: 500 A (690 V, 100 kA) gR: 500 A (690 V, 100 kA) gG: 10 A (500 V, 1 kA)  with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes 210 mm 145 mm
at 600 V rated value  design of the miniature circuit breaker for short-circuit protection of the auxiliary switch required  contact reliability of auxiliary contacts  Short-circuit protection  product function short circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  • side-by-side mounting  height  width  depth  required spacing  • with side-by-side mounting  — forwards	0.1 A gG: 10 A (230 V, 400 A)  1 faulty switching per 100 million (17 V, 1 mA)  No  GG: 500 A (690 V, 100 kA) gR: 500 A (690 V, 100 kA) gG: 10 A (500 V, 1 kA)  with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes 210 mm 145 mm 202 mm
at 600 V rated value  design of the miniature circuit breaker for short-circuit protection of the auxiliary switch required  contact reliability of auxiliary contacts  Short-circuit protection  product function short circuit protection  design of the fuse link  for short-circuit protection of the main circuit  with type of coordination 1 required  with type of assignment 2 required  for short-circuit protection of the auxiliary switch required  installation/ mounting/ dimensions  mounting position  fastening method  side-by-side mounting  height  width  depth  required spacing  with side-by-side mounting	0.1 A gG: 10 A (230 V, 400 A)  1 faulty switching per 100 million (17 V, 1 mA)  No  QG: 500 A (690 V, 100 kA) gR: 500 A (690 V, 100 kA) gG: 10 A (500 V, 1 kA)  with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes 210 mm 145 mm 202 mm
at 600 V rated value  design of the miniature circuit breaker for short-circuit protection of the auxiliary switch required  contact reliability of auxiliary contacts  Short-circuit protection  product function short circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  • side-by-side mounting  height  width  depth  required spacing  • with side-by-side mounting  — forwards  — upwards  — downwards	0.1 A gG: 10 A (230 V, 400 A)  1 faulty switching per 100 million (17 V, 1 mA)  No  QG: 500 A (690 V, 100 kA) gR: 500 A (690 V, 100 kA) gG: 10 A (500 V, 1 kA)  with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes 210 mm 145 mm 202 mm  10 mm 10 mm
at 600 V rated value  design of the miniature circuit breaker for short-circuit protection of the auxiliary switch required  contact reliability of auxiliary contacts  Short-circuit protection  product function short circuit protection  design of the fuse link  for short-circuit protection of the main circuit  with type of coordination 1 required  with type of assignment 2 required  for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  side-by-side mounting  height  width  depth  required spacing  with side-by-side mounting  forwards  upwards  downwards  downwards  at the side	0.1 A gG: 10 A (230 V, 400 A)  1 faulty switching per 100 million (17 V, 1 mA)  No  QG: 500 A (690 V, 100 kA) gR: 500 A (690 V, 100 kA) gG: 10 A (500 V, 1 kA)  with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes 210 mm 145 mm 202 mm
at 600 V rated value  design of the miniature circuit breaker for short-circuit protection of the auxiliary switch required  contact reliability of auxiliary contacts  Short-circuit protection  product function short circuit protection  design of the fuse link  for short-circuit protection of the main circuit  with type of coordination 1 required  with type of assignment 2 required  for short-circuit protection of the auxiliary switch required  installation/ mounting/ dimensions  mounting position  fastening method  side-by-side mounting  height  width  depth  required spacing  with side-by-side mounting  forwards  upwards  downwards  downwards  downwards  downwards  downwards  for grounded parts	0.1 A  gG: 10 A (230 V, 400 A)  1 faulty switching per 100 million (17 V, 1 mA)  No  QG: 500 A (690 V, 100 kA) gR: 500 A (690 V, 100 kA) gG: 10 A (500 V, 1 kA)  with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes 210 mm 145 mm 202 mm  20 mm 10 mm 10 mm 10 mm 10 mm
at 600 V rated value  design of the miniature circuit breaker for short-circuit protection of the auxiliary switch required  contact reliability of auxiliary contacts  Short-circuit protection  product function short circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  • side-by-side mounting  height  width  depth  required spacing  • with side-by-side mounting  — forwards  — upwards  — downwards  — at the side  • for grounded parts  — forwards	0.1 A gG: 10 A (230 V, 400 A)  1 faulty switching per 100 million (17 V, 1 mA)  No  GG: 500 A (690 V, 100 kA) gR: 500 A (690 V, 100 kA) gG: 10 A (500 V, 1 kA)  with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes 210 mm 145 mm 202 mm  20 mm 10 mm 10 mm 10 mm 10 mm
at 600 V rated value  design of the miniature circuit breaker for short-circuit protection of the auxiliary switch required  contact reliability of auxiliary contacts  Short-circuit protection  product function short circuit protection  design of the fuse link  for short-circuit protection of the main circuit  with type of coordination 1 required  with type of assignment 2 required  for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  side-by-side mounting  height  width  depth  required spacing  with side-by-side mounting  forwards  upwards  downwards  at the side  for grounded parts  forwards  upwards  upwards  upwards  upwards  upwards	0.1 A gG: 10 A (230 V, 400 A)  1 faulty switching per 100 million (17 V, 1 mA)  No  gG: 500 A (690 V, 100 kA) gR: 500 A (690 V, 100 kA) gG: 10 A (500 V, 1 kA)  with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes 210 mm 145 mm 202 mm  0 mm 0 mm 0 mm
at 600 V rated value  design of the miniature circuit breaker for short-circuit protection of the auxiliary switch required  contact reliability of auxiliary contacts  Short-circuit protection  product function short circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  • side-by-side mounting  height  width  depth  required spacing  • with side-by-side mounting  — forwards  — upwards  — downwards  — at the side  • for grounded parts  — forwards  — upwards  — upwards  — upwards  — at the side	0.1 A gG: 10 A (230 V, 400 A)  1 faulty switching per 100 million (17 V, 1 mA)  No  gG: 500 A (690 V, 100 kA) gR: 500 A (690 V, 100 kA) gG: 10 A (500 V, 1 kA)  with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes 210 mm 145 mm 202 mm  0 mm 10 mm 10 mm 10 mm 10 mm 10 mm
at 600 V rated value  design of the miniature circuit breaker for short-circuit protection of the auxiliary switch required  contact reliability of auxiliary contacts  Short-circuit protection  product function short circuit protection  design of the fuse link  for short-circuit protection of the main circuit  with type of coordination 1 required  with type of assignment 2 required  for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  side-by-side mounting  height  width  depth  required spacing  with side-by-side mounting  forwards  upwards  downwards  at the side  for grounded parts  forwards  upwards  upwards  upwards  upwards  upwards	0.1 A gG: 10 A (230 V, 400 A)  1 faulty switching per 100 million (17 V, 1 mA)  No  gG: 500 A (690 V, 100 kA) gR: 500 A (690 V, 100 kA) gG: 10 A (500 V, 1 kA)  with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes 210 mm 145 mm 202 mm  20 mm 10 mm 0 mm 0 mm

— forwards	20 mm
	<del></del>
— upwards	10 mm
— downwards	10 mm
— at the side	10 mm
Connections/ Terminals	
type of electrical connection	
for main current circuit	Connection bar
<ul> <li>for auxiliary and control circuit</li> </ul>	screw-type terminals
<ul> <li>at contactor for auxiliary contacts</li> </ul>	Screw-type terminals
of magnet coil	Screw-type terminals
width of connection bar	25 mm
thickness of connection bar	6 mm
diameter of holes	11 mm
number of holes	1
connectable conductor cross-section for main contacts	
<ul> <li>solid or stranded</li> </ul>	70 240 mm²
• stranded	70 240 mm²
connectable conductor cross-section for auxiliary contacts	
<ul> <li>solid or stranded</li> </ul>	0.5 4 mm²
<ul> <li>finely stranded with core end processing</li> </ul>	0.5 2.5 mm²
type of connectable conductor cross-sections	
for auxiliary contacts	
— solid	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²), max. 2x (0.75 4 mm²)
— solid or stranded	2x (0,5 1,5 mm²), 2x (0,75 2,5 mm²), max. 2x (0,75 4 mm²)
<ul> <li>finely stranded with core end processing</li> </ul>	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
<ul> <li>for AWG cables for auxiliary contacts</li> </ul>	2x (20 16), 2x (18 14), 1x 12
Safety related data	
product function	
<ul> <li>mirror contact according to IEC 60947-4-1</li> </ul>	Yes
<ul> <li>positively driven operation according to IEC 60947-5-1</li> </ul>	No
protection class IP on the front according to IEC 60529	IP00; IP20 with box terminal/cover
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front with box terminal/cover
Certificates/ approvals	

**General Product Approval** 

Confirmation









**EMC** 

**Functional** Safety/Safety of Ma-**Declaration of Conformity Test Certificates** Marine / Shipping

Type Examination Cer-





Type Test Certificates/Test Report

Special Test Certific-<u>ate</u>



Marine / Shipping other









Confirmation

Confirmation

Railway other

Special Test Certific-Vibration and Shock Miscellaneous

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

## Information on the packaging

om/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT1466-6AM36

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT1466-6AM36

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RT1466-6AM3


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) <a href="http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RT1466-6AM36&lang=en">http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RT1466-6AM36&lang=en</a>


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT1466-6AM36/char


Further characteristics (e.g. electrical endurance, switching frequency)

earch&mlfb=3RT1466-6AM36&objecttype=14&gridview=view1



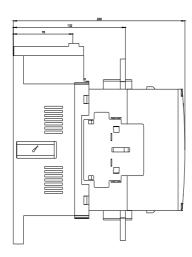

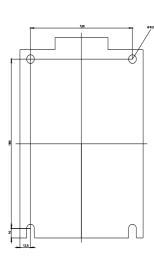

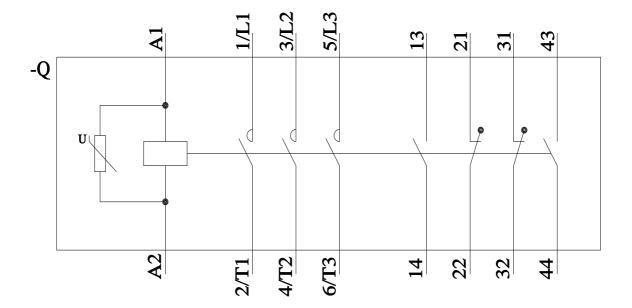

last modified: 7/8/2023 🖸

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RT14666AM36