SIEMENS

Data sheet

US2:LCE02C305277A



Electrically held lighting contactor, (convertible to mech. held), Amp rating 30A (tungsten 20A), 3 N.C. / 5 N.O. poles, 277V 60Hz / 240V 50Hz coil, Noncombination type, Enclosure NEMA type 12, Dust/drip proof for indoors

weight [lb]19 lbHeight x Width x Depth [in]16 × 13 × 6 intouch protection against electrical shockNA for enclosed productsinstallation altitude [ft] at height above sea level maximum6560 ftambient temperature [°F]-22 +149 °F• during storage-13 +104 °Fambient temperature-30 +65 °C• during operation-25 +40 °Ccountry of originUSA	product brand name	Class LC
Between NO and NC Ceneral technical data weight [Ib] 19 lb Height x Widh x Deph [in] 18 x 13 x 6 in touch protection against electrical shock NA for enclosed products installation aitfluide [If] at height above sea level maximum 6660 ft ambient temperature ['F] - • during storage -22 +149 'F • during storage -30 +65 'C • during operation ISA contactor USA contactor -25 +40 'F size of contactor 00 Amp number of NC contacts for main contacts 5 number of NC contacts for main contacts 300 OV mechanical service life (operating cycles) of the main contacts 100000 releta value 20A @2277V 1p 1ph • at tungsten (1 pole per 1 phase) rated value 20A @420V 2p 1ph • at tungsten (2 poles per 3 phases) rated value 20A @430V 2p 1ph • at tungsten (1 poles per 3 phases) rated value	design of the product	Electrically held lighting contactor (convertible to mechanically held)
weight [b] 19 lb Height x Widh x Depth [in] 16 × 13 × 6 in touch protection against electrical shock NA for enclosed products installation altitude [t] at height above sea level maximum 6660 ft ambient temperature ['F] - • during storage -22 +149 'F • during operation -13 +104 'F ambient temperature - • during operation -25 +40 °C • during operation -25 +40 °C • contactor 30 Amp number of NC contacts for main contacts 5 number of NC contacts for main contacts 3 operating voltage for main current circuit at AC at 60 Hz 100000 maximum 100000 • during of the main contacts Silver alloy, double break mechanical service life (operating cycles) of the main contacts 100000 • with electronic ballast [LED driver] (1 pole per 1 phase) 20A @277V 1p 1ph • at tungsten (1 pole per 1 phase) rated value 20A @480V 3p 3ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 3p 3ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at balalast (2 poles per	special product feature	
Height xWidth x Depth [in] 16 × 13 × 6 in touch protection against electrical shock NA for enclosed products installation attitude [ft] at height above sea level maximum 6560 ft ambient temperature [F] - • during storage -22 +149 "F • during operation -13 +104 "F ambient temperature - • during operation -25 +40 °C • during operation -26 +65 °C • during operation -27 +65 °C • during operation -27 +65 °C • during torigin USA Contacts 5 num	General technical data	
Dot NA for enclosed products installation altitude [ft] at height above sea level maximum 6560 ft ambient temperature [°F] -22 +149 °F • during storage -22 +149 °F • during operation -30 +65 °C • during storage -30 +65 °C • during operation -25 +40 °C • during storage -30 +65 °C • during operation -25 +40 °C country of origin USA Contactor 30 Amp number of NC contacts for main contacts 5 number of NC contacts of lighting contactor 100000 • with electronic ballast [LED driver] (1 pole per 1 phase) 10000 • at tungsten (1 pole per 1 phase) rated value 20A @420V / 3A @277V 1p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @460V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph •	weight [lb]	19 lb
Installation altitude [ft] at height above sea level maximum 6560 ft ambient temperature ["F] -22 +149 "F • during storage -22 +149 "F • during storage -30 +65 "C • during operation -25 +40 "C • country of origin USA Contactor 30 Amp number of NC contacts for main contacts 5 number of NC contacts for main contacts 3 operating voltage for main current circuit at AC at 60 Hz 600 V maximum Silver alloy, double break Type of main contacts 5 operating voltage for main current circuit at AC at 60 Hz 600 V maximum Silver alloy, double break Type of main contacts 100000 value 20A @277V 1p 1ph • at tungsten (1 pole per 1 phase) rated value 20A @277V 1p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at ballast (2 poles per 1 phase) rated value	Height x Width x Depth [in]	16 × 13 × 6 in
ambient temperature ['F] -22 +149 "F • during storage -22 +149 "F • during operation -13 +104 "F ambient temperature -13 +165 "C • during operation -25 +40 "C country of origin USA Contactor 30 Amp number of NO contacts for main contacts 5 number of NC contacts for main contacts 3 operating voltage for main contacts 5 number of NC contacts for main contacts 3 operating voltage for main contacts 5 number of NC contacts for main contacts 3 operating voltage for main contacts 5 recontacts 3 operating voltage for main contacts 100000 vith electronic ballast [LED driver] (1 pole per 1 phase) 10A @ 120V / 3A @277V 1p 1ph • att ungsten (2 poles per 1 phase) rated value 20A @480V 2p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 2p 3ph • at ballast (1 pole per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph	touch protection against electrical shock	NA for enclosed products
• during storage-22 +149 °F• during operation-13 +104 °Fambient temperature-30 +65 °C• during storage-30 +65 °C• during operation-25 +40 °Ccountry of originUSAContactor5number of NO contacts for main contacts5number of NC contacts for main contacts3operating voltage for main current circuit at AC at 60 Hz600 VType of main contactsSilver alloy, double breakmother of ND contacts for main contacts100000Type of main contacts of lighting contactor100000• with electronic ballast [LED driver] (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (1 pole per 1 phase) rated value30A @347V 1p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (1 pole per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 3p 3ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 3p 3ph• at ballast (2 poles per 1 phase) rated value30A @600V 3p 3ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (1 pole per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph	installation altitude [ft] at height above sea level maximum	6560 ft
• during operation-13 +104 °Fambient temperature-30 +65 °C• during storage-30 +65 °C• during operation25 +40 °Ccountry of originUSAContactor30 Ampnumber of NC contacts for main contacts5number of NC contacts for main contacts3operating voltage for main current circuit at AC at 60 Hz maximum600 VType of main contactsSilver alloy, double breakmechanical service life (operating cycles) of the main contacts100000contact rating of the main contacts of lighting contactor10A @120V / 3A @277V 1p 1ph• with electronic ballast [LED driver] (1 pole per 1 phase) rated value20A @480V 2p 1ph• at tungsten (1 pole per 1 phase) rated value20A @480V 2p 1ph• at tungsten (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (1 pole per 1 phase) rated value30A @600V 3p 3ph• at ballast (2 poles per 1 phase) rated value30A @600V 3p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 3p 3ph• at ballast (2 poles per 1 phase) rated value30A @600V 3p 3ph• at ballast (2 poles per 1 phase) rated value30A @600V 3p 3ph• at tesistive load (1 pole per 1 phase) rated value30A @600V 3p 3ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (2 poles per 1 phase) rated value30A	ambient temperature [°F]	
ambient temperature -30 +65 °C • during storage -30 +65 °C • during operation -25 +40 °C country of origin USA Contactor 30 Amp number of NO contacts for main contacts 5 number of NC contacts for main contacts 3 operating voltage for main current circuit at AC at 60 Hz 600 V maximum 5 Type of main contacts Silver alloy, double break mechanical service life (operating cycles) of the main contacts 100000 vith electronic ballast [LED driver] (1 pole per 1 phase) rated value 20A @277V 1p 1ph • at tungsten (1 pole per 1 phase) rated value 20A @480V 3p 3ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 3p 3ph • at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at ballast (2 p	during storage	-22 +149 °F
• during storage-30 +65 °C• during operation-25 +40 °Ccountry of originUSAContactorsize of contactorsize of contactor30 Ampnumber of NO contacts for main contacts5number of NC contacts for main contacts3operating voltage for main current circuit at AC at 60 Hz maximum600 VType of main contactsSilver alloy, double breakmechanical service life (operating cycles) of the main contacts100000• with electronic ballast [LED driver] (1 pole per 1 phase) rated value10A @120V / 3A @277V 1p 1ph• at ungsten (1 pole per 1 phase) rated value20A @480V 2p 1ph• at ungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at tesistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 po	during operation	-13 +104 °F
• during operation-25 +40 °Ccountry of originUSAContactorsize of contactor30 Ampnumber of NO contacts for main contacts5number of NC contacts for main contacts3operating voltage for main current circuit at AC at 60 Hz600 VmaximumSilver alloy, double breakType of main current circuit at AC at 60 Hz100000mechanical service life (operating cycles) of the main contacts100000• with electronic ballast [LED driver] (1 pole per 1 phase) rated value10A @120V / 3A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @480V 2p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at ballast (2 poles per 1 phase) rated value20A @000V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at tesistive load (1 pole per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (2 poles per 1 phase) rated valu	ambient temperature	
country of originUSAContactor30 Ampnumber of NO contacts for main contacts5number of NC contacts for main contacts3operating voltage for main current circuit at AC at 60 Hz600 VmaximumSilver alloy, double breakType of main contactsSilver alloy, double breakType of main contactsSilver alloy, double breaktotal service life (operating cycles) of the main contacts100000voitage for nain contacts of lighting contactor• with electronic ballast [LED driver] (1 pole per 1 phase) rated value• at tungsten (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (3 poles per 3 phases) rated value30A @600V 2p 1ph• at ballast (1 pole per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (1 pole per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V	during storage	-30 +65 °C
Size of contactor 30 Amp number of NO contacts for main contacts 5 number of NC contacts for main contacts 3 operating voltage for main current circuit at AC at 60 Hz 600 V maximum 7ype of main contacts Silver alloy, double break mechanical service life (operating cycles) of the main contacts 100000 vith electronic ballast [LED driver] (1 pole per 1 phase) rated value 20A @277V 1p 1ph • at tungsten (1 pole per 1 phase) rated value 20A @480V 2p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 2p 1ph • at ballast (2 poles per 3 phases) rated value 30A @600V 2p 1ph • at ballast (3 poles per 3 phases) rated value 30A @600V 3p 3ph • at ballast (3 poles per 3 phases) rated value 30A @600V 2p 1ph • at trasistive load (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at resistive load (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (2 poles per 3 phases) rated value 30A @600V 2p 1ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 3p 3ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 3p 3ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 3p 3ph	during operation	-25 +40 °C
size of contactor 30 Amp number of NO contacts for main contacts 5 number of NC contacts for main contacts 3 operating voltage for main current circuit at AC at 60 Hz maximum 600 V Type of main contacts Silver alloy, double break mechanical service life (operating cycles) of the main contacts typical 100000 contact rating of the main contacts of lighting contactor 10A @120V / 3A @277V 1p 1ph • with electronic ballast [LED driver] (1 pole per 1 phase) rated value 20A @480V 2p 1ph • at tungsten (1 pole per 1 phase) rated value 20A @480V 2p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 2p 1ph • at ballast (2 poles per 3 phases) rated value 30A @600V 2p 1ph • at ballast (3 poles per 3 phases) rated value 30A @600V 2p 1ph • at ballast (3 poles per 3 phases) rated value 30A @600V 2p 1ph • at tresistive load (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (2 poles per 3 phases) rated value 30A @600V 2p 1ph • at resistive load (2 poles per 3 phases) rated value 30A @600V 2p 1ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 2p 1ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 3p 3ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 3p 3ph • at resis	country of origin	USA
number of NO contacts for main contacts5number of NC contacts for main contacts3operating voltage for main current circuit at AC at 60 Hz maximum600 VType of main contactsSilver alloy, double breakmechanical service life (operating cycles) of the main contacts typical100000contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) rated value10A @120V / 3A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (1 pole per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 3p 3ph• at ballast (3 poles per 3 phases) rated value30A @600V 3p 3ph• at ballast (2 poles per 1 phase) rated value30A @600V 3p 3ph• at ballast (2 poles per 1 phase) rated value30A @600V 3p 3ph• at ballast (3 poles per 3 phases) rated value30A @600V 3p 3ph• at ballast (3 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (1 pole per 1 phase) rated value30A @600V 3p 3ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rate	Contactor	
number of NC contacts for main contacts3operating voltage for main current circuit at AC at 60 Hz maximum600 VType of main contactsSilver alloy, double breakmechanical service life (operating cycles) of the main contacts typical100000contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) rated value10A @120V / 3A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at ballast (1 pole per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 3 phases) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 2p 1ph• at resistive load (1 pole per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3phAuxiliary contact30A @600V 3p 3phfunction of NC contacts for auxiliary contacts0number of NO contacts for auxiliary contacts0	size of contactor	30 Amp
operating voltage for main current circuit at AC at 60 Hz maximum600 VType of main contactsSilver alloy, double breakmechanical service life (operating cycles) of the main contacts typical100000contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) rated value10A @120V / 3A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (3 poles per 3 phases) rated value30A @600V 2p 1ph• at ballast (1 pole per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (1 pole per 1 phase) rated value30A @600V 3p 3ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @60	number of NO contacts for main contacts	5
maximumSilver alloy, double breakType of main contactsSilver alloy, double breakmechanical service life (operating cycles) of the main contacts typical100000contact rating of the main contacts of lighting contactor10A @120V / 3A @277V 1p 1ph• with electronic ballast [LED driver] (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (3 poles per 3 phases) rated value20A @480V 3p 3ph• at ballast (1 pole per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 2p 1ph• at resistive load (1 pole per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3phAuxiliary contact0number of NC contacts for auxiliary contacts0number of NO contacts for auxiliary contacts0	number of NC contacts for main contacts	3
mechanical service life (operating cycles) of the main contacts typical100000contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) rated value10A @120V / 3A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (3 poles per 3 phases) rated value20A @480V 3p 3ph• at ballast (1 pole per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 3 phases) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (1 pole per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• Auxiliary contacts0number of NC contacts for auxiliary contacts0		600 V
typicalcontact rating of the main contacts of lighting contactor• with electronic ballast [LED driver] (1 pole per 1 phase) rated value• at tungsten (1 pole per 1 phase) rated value• at tungsten (2 poles per 1 phase) rated value• at tungsten (2 poles per 1 phase) rated value• at tungsten (3 poles per 3 phases) rated value• at ballast (1 pole per 1 phase) rated value• at ballast (2 poles per 1 phase) rated value• at ballast (2 poles per 3 phases) rated value• at ballast (2 poles per 1 phase) rated value• at ballast (2 poles per 1 phase) rated value• at ballast (2 poles per 1 phase) rated value• at ballast (2 poles per 1 phase) rated value• at ballast (2 poles per 1 phase) rated value• at ballast (2 poles per 1 phase) rated value• at ballast (2 poles per 1 phase) rated value• at resistive load (1 pole per 1 phase) rated value• at resistive load (2 poles per 1 phase) rated value• at resistive load (3 poles per 3 phases) rated value• at resistive load (3 poles per 3 phases) rated value• at resistive load (3 poles per 3 phases) rated value• at resistive load (3 poles per 3 phases) rated value• at resistive load (3 poles per 3 phases) rated value• at resistive load (3 poles per 3 phases) rated value• at resistive load (3 poles per 3 phases) rated value• at resistive load (3 poles per 3 phases) rated value• at resistive load (5 poles per 3 phases) rated value• at resistive load (6 poles per 3 phases) rated value• at resistive load (3 poles per 3 phases) rated value• at	Type of main contacts	Silver alloy, double break
• with electronic ballast [LED driver] (1 pole per 1 phase) rated value10A @120V / 3A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (3 poles per 3 phases) rated value20A @480V 3p 3ph• at ballast (1 pole per 1 phase) rated value30A @347V 1p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 3p 3ph• at ballast (3 poles per 3 phases) rated value30A @600V 1p 1ph• at resistive load (1 pole per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (5 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (5 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (5 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (5 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (5 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive l		100000
rated value20A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @480V 2p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 3p 3ph• at tungsten (3 poles per 3 phases) rated value20A @480V 3p 3ph• at ballast (1 pole per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 3 phases) rated value30A @600V 3p 3ph• at ballast (3 poles per 3 phases) rated value30A @600V 1p 1ph• at resistive load (1 pole per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• number of NC contacts for auxiliary contacts0• number of NO contacts for auxiliary contacts0	contact rating of the main contacts of lighting contactor	
• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (3 poles per 3 phases) rated value20A @480V 3p 3ph• at ballast (1 pole per 1 phase) rated value30A @347V 1p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 3p 3ph• at ballast (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (1 pole per 1 phase) rated value30A @600V 1p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (5 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (6 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (7 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (7 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (7 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (7 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (7 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (7 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (8 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (9 poles per 3 phases) rated value0• at resistive load (9 poles per 3 phases)0 <td></td> <td>10A @120V / 3A @277V 1p 1ph</td>		10A @120V / 3A @277V 1p 1ph
• at tungsten (3 poles per 3 phases) rated value20A @480V 3p 3ph• at ballast (1 pole per 1 phase) rated value30A @347V 1p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (1 pole per 1 phase) rated value30A @600V 1p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• Auxiliary contact30A @600V 3p 3phnumber of NC contacts for auxiliary contacts0number of NO contacts for auxiliary contacts0	 at tungsten (1 pole per 1 phase) rated value 	20A @277V 1p 1ph
• at ballast (1 pole per 1 phase) rated value30A @347V 1p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (1 pole per 1 phase) rated value30A @600V 1p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3phAuxiliary contact30A @600V 3p 3phnumber of NC contacts for auxiliary contacts0number of NO contacts for auxiliary contacts0	 at tungsten (2 poles per 1 phase) rated value 	20A @480V 2p 1ph
• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (1 pole per 1 phase) rated value30A @600V 1p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value0• at resistive load (3 poles per 3 phases)0• at resistive load (3 poles per 3 phases)0• at resistive load (3 poles per 3 phases)0• at resist	 at tungsten (3 poles per 3 phases) rated value 	20A @480V 3p 3ph
• at ballast (3 poles per 3 phases) rated value 30A @600V 3p 3ph • at resistive load (1 pole per 1 phase) rated value 30A @600V 1p 1ph • at resistive load (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (2 poles per 3 phases) rated value 30A @600V 3p 3ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 3p 3ph Auxiliary contact 30A @600V 3p 3ph number of NC contacts for auxiliary contacts 0 number of NO contacts for auxiliary contacts 0	 at ballast (1 pole per 1 phase) rated value 	30A @347V 1p 1ph
• at resistive load (1 pole per 1 phase) rated value 30A @600V 1p 1ph • at resistive load (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 3p 3ph Auxiliary contact number of NC contacts for auxiliary contacts 0 number of NO contacts for auxiliary contacts 0	 at ballast (2 poles per 1 phase) rated value 	30A @600V 2p 1ph
• at resistive load (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 3p 3ph Auxiliary contact 30A @600V 3p 3ph number of NC contacts for auxiliary contacts 0 number of NO contacts for auxiliary contacts 0	 at ballast (3 poles per 3 phases) rated value 	30A @600V 3p 3ph
	• at resistive load (1 pole per 1 phase) rated value	30A @600V 1p 1ph
Auxiliary contact 0 number of NC contacts for auxiliary contacts 0 number of NO contacts for auxiliary contacts 0	• at resistive load (2 poles per 1 phase) rated value	30A @600V 2p 1ph
number of NC contacts for auxiliary contacts 0 number of NO contacts for auxiliary contacts 0	• at resistive load (3 poles per 3 phases) rated value	30A @600V 3p 3ph
number of NO contacts for auxiliary contacts 0	Auxiliary contact	
	number of NC contacts for auxiliary contacts	0
number of total auxiliary contacts maximum 4	number of NO contacts for auxiliary contacts	0
	number of total auxiliary contacts maximum	4

contact rating of auxiliary contacts of contactor according to UL	NA
Coil	
type of voltage of the control supply voltage	AC
control supply voltage	
 at AC at 50 Hz rated value 	240 V
 at AC at 60 Hz rated value 	277 V
apparent pick-up power of magnet coil at AC	248 VA
apparent holding power of magnet coil at AC	28 VA
operating range factor control supply voltage rated value of magnet coil	0.85 1.1
Enclosure	
degree of protection NEMA rating of the enclosure	NEMA Type 12
design of the housing	dustproof and drip-proof for indoor use
Mounting/wiring	
mounting position	Vertical
fastening method	Surface mounting and installation
type of electrical connection for supply voltage line-side	Screw-type terminals
tightening torque [lbf-in] for supply	35 35 lbf·in
type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded	2x (14 8 AWG)
temperature of the conductor for supply maximum permissible	75 °C
material of the conductor for supply	CU
type of electrical connection for load-side outgoing feeder	Screw-type terminals
tightening torque [lbf·in] for load-side outgoing feeder	35 35 lbf·in
type of connectable conductor cross-sections for AWG cables for load-side outgoing feeder single or multi-stranded	2x (14 8 AWG)
temperature of the conductor for load-side outgoing feeder maximum permissible	75 °C
material of the conductor for load-side outgoing feeder	CU
type of electrical connection of magnet coil	Screw-type terminals
tightening torque [lbf-in] at magnet coil	15 15 lbf·in
type of connectable conductor cross-sections of magnet coil for AWG cables single or multi-stranded	2x (18 14 AWG)
temperature of the conductor at magnet coil maximum permissible	75 °C
material of the conductor at magnet coil	CU
Short-circuit current rating	
design of the fuse link for short-circuit protection of the main circuit required	100kA@600V (Class R or J 40A max)
design of the short-circuit trip	Thermal magnetic circuit breaker
maximum short-circuit current breaking capacity (Icu)	
• at 240 V	24 kA
• at 480 V	65 kA
• at 600 V	25 kA
certificate of suitability	NEMA ICS 2; UL 508
Further information	

Industrial Controls - Product Overview (Catalogs, Brochures,...)

www.usa.siemens.com/iccatalog

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/us/Catalog/product?mlfb=US2:LCE02C305277A

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/US/en/ps/US2:LCE02C305277A

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=US2:LCE02C305277A&lang=en

Certificates/approvals

https://support.industry.siemens.com/cs/US/en/ps/US2:LCE02C305277A/certificate



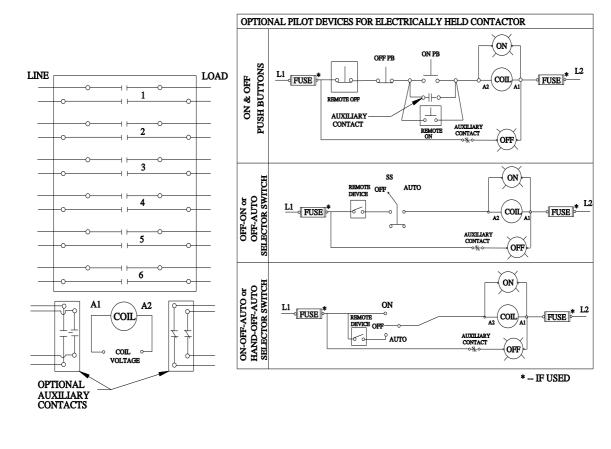

D38297001

last modified:

4/5/2023 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: LCE02C305277A