


Features

8-port Junction Block

Banner's Junction Blocks are designed to reduce wiring and to simplify connecting multiple products.




- M8 3-pin female termination with M12 12-pin male connector
- 8 ports
- NPN, PNP, and discrete models available
- 8 Signals, Pin 4 each Port

Models

Model	Output	Indication
JB-8M8-M12-P4	PNP	LED
JB-8M8-M12-N4	NPN	LED
JB-8M8-M12-4	Discrete	Non-LED

Wiring

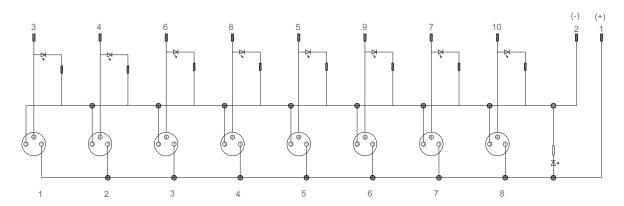

LED Indicating PNP Other circuit diagram (NPN) can be customized

M8 3-pin Female



1 = Brown 3 = Blue 4 = Black

M12 12-pin Male



1 = White 2 = Brown 3 = Green 4 = Yellow 5 = Gray 6 = Pink 7 = Blue 8 = Red 9 = Orange 10 = Tyrian Purple 11 = Black 12 = Violet

Specifications

Voltage

LED models: 30 V DC Non-LED models: 60 V DC

Rated Current

1A per port / 3A total

Indicators (LED models only)

Power LED: Red (0 or 8, depending on model) Signal LED: Amber (0 or 1, depending on model)

Construction

Body: PBT

Coupling nut: Nickel-plated brass

Vibration

Method: EN 60068-2-6:2008 Frequency Range: 10-55 Hz (Sine)

Amplitude: 0.5 mm

Sweep Cycle Duration: 5 minutes (2.5 min per sweep) Dwell Duration at resonant frequency: 30 Minutes **Mechanical Shock**

Method: EN 60068-2-27:2009 Pulse Shape: Half-Sine Peak Acceleration: 30 G Duration of the pulse: 11 mS

Environmental Ratings

IP67

Operating Conditions


-25 °C to +80 °C (-13 °F to +176 °F)

Certifications

CE

Dimensions

All measurements are listed in millimeters, unless noted otherwise. The measurements provided are subject to change.

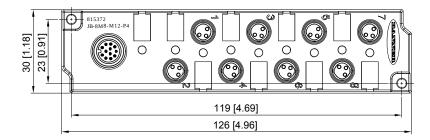




Accessories


Cordsets

Home Run Cordsets

12-Pin M12 Female Single-Ended Cordsets			
Model	Length	Dimensions	Pinout (Female)
MQDC-1206	2 m (6.56 ft)		8
MQDC-1215	5 m (16.40 ft)	M12 x 1 - 6H Ø14.5 mm 40 mm L1	12 — 9 1 = White 2 = Brown 3 = Green
MQDC-1230	9 m (29.53 ft)		7

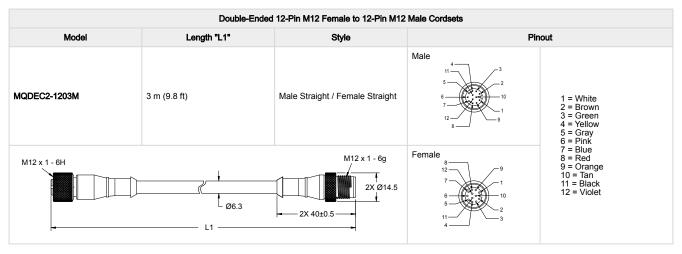

Signal Port Cordsets

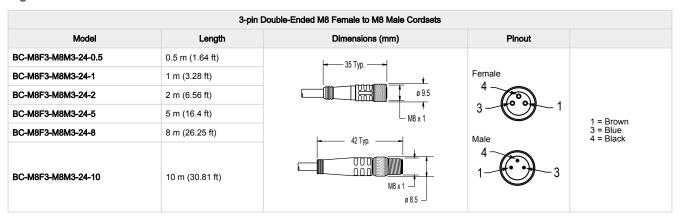

Product Support and Maintenance

Repairs

Contact Banner Engineering for troubleshooting of this device. **Do not attempt any repairs to this Banner device; it contains no field-replaceable parts or components.** If the device, device part, or device component is determined to be defective by a Banner Applications Engineer, they will advise you of Banner's RMA (Return Merchandise Authorization) procedure.

IMPORTANT: If instructed to return the device, pack it with care. Damage that occurs in return shipping is not covered by warranty.

Contact Us

Banner Engineering Corp. headquarters is located at: 9714 Tenth Avenue North | Plymouth, MN 55441, USA | Phone: + 1 888 373 6767

For worldwide locations and local representatives, visit www.bannerengineering.com.

Banner Engineering Corp Limited Warranty

Banner Engineering Corp. warrants its products to be free from defects in material and workmanship for one year following the date of shipment. Banner Engineering Corp. will repair or replace, free of charge, any product of its manufacture which, at the time it is returned to the factory, is found to have been defective during the warranty period. This warranty does not cover damage or liability for misuse, abuse, or the improper application or installation of the Banner product.

THIS LIMITED WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES WHETHER EXPRESS OR IMPLIED (INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE), AND WHETHER ARISING UNDER COURSE OF PERFORMANCE, COURSE OF DEALING OR TRADE USAGE.

This Warranty is exclusive and limited to repair or, at the discretion of Banner Engineering Corp., replacement. IN NO EVENT SHALL BANNER ENGINEERING CORP. BE LIABLE TO BUYER OR ANY OTHER PERSON OR ENTITY FOR ANY EXTRA COSTS, EXPENSES, LOSSES, LOSS OF PROFITS, OR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES RESULTING FROM ANY PRODUCT DEFECT OR FROM THE USE OR INABILITY TO USE THE PRODUCT, WHETHER ARISING IN CONTRACT OR WARRANTY, STATUTE, TORT, STRICT LIABILITY, NEGLIGENCE, OR OTHERWISE.

Banner Engineering Corp. reserves the right to change, modify or improve the design of the product without assuming any obligations or liabilities relating to any product previously manufactured by Banner Engineering Corp. Any misuse, abuse, or improper application or installation of this product or use of the product for personal protection applications when the product is identified as not intended for such purposes will void the product warranty. Any modifications to this product without prior express approval by Banner Engineering Corp will void

the product warranties. All specifications published in this document are subject to change; Banner reserves the right to modify product specifications or update documentation at any time. Specifications and product information in English supersede that which is provided in any other language. For the most recent version of any documentation, refer to: www.bannerengineering.com.

For patent information, see www.bannerengineering.com/patents.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Banner Engineering:

JB-8M8-M12-4 JB-8M8-M12-N4 JB-8M8-M12-P4