

Features

- Dual Zeners in Common Anode Configuration
- ΔV_z for Both Diodes in One Case is $\leq 5\%$.
- Ideally Suited for Automated Assembly Processes
- Moisture Sensitivity Level 1
- Epoxy Meets UL 94 V-0 Flammability Rating
- Halogen Free. "Green" Device (Note 1)
- Lead Free Finish/RoHS Compliant ("P" Suffix Designates RoHS Compliant. See Ordering Information)

Maximum Ratings


- Operating Junction Temperature Range: -55°C to $+150^{\circ}\text{C}$
- Storage Temperature Range: -55°C to $+150^{\circ}\text{C}$
- Thermal Resistance : 417°C/W Junction to Ambient(Note 2)

Parameter	Symbol	Rating	Conditions
Power Dissipation	P_D	300mW	
Maximum Forward Voltage	V_F	0.9V	$I_F=10\text{mA}$

Note:1. Halogen free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.


2. Part mounted on FR-4 board with recommended pad layout.

Internal Structure and Marking Code

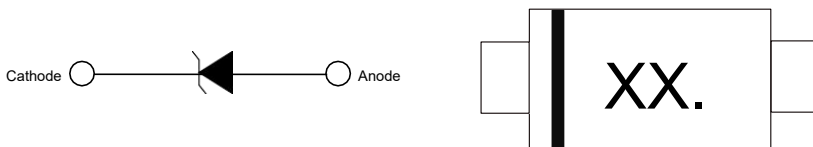


**300 mW
Zener Diode
2 to 47 Volts**

SOD-323

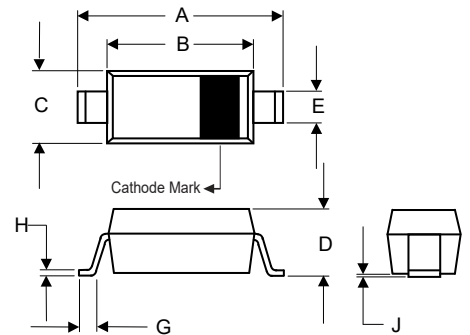

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	0.090	0.107	2.30	2.70	
B	0.063	0.071	1.60	1.80	
C	0.045	0.053	1.15	1.35	
D	0.031	0.045	0.80	1.15	
E	0.010	0.016	0.25	0.40	
G	0.004	0.018	0.10	0.45	
H	0.004	0.010	0.10	0.25	
J	----	0.006	----	0.15	

Suggested Solder Pad Layout

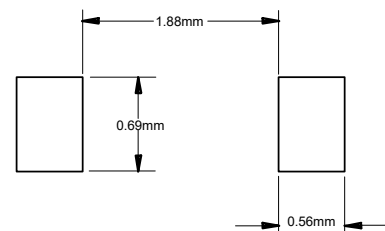

Electrical Characteristics @ 25°C Unless Otherwise Specified

MCC Part Number	Zener Voltage ⁽²⁾	Maximum Zener Impedance ⁽³⁾		Maximum Zener Impedance ⁽³⁾		Min reverse Voltage ⁽²⁾		Maximum Junction Capacitance	Marking Code
	$V_Z @ I_{ZT}$	I_{ZT}	$Z_{ZT} @ I_{ZT}$	$Z_{ZK} @ I_{ZK}$	I_{ZK}	I_R	V_R	C_J	
	V	mA	Ω	Ω	mA	μA	V	pF	
BZT52C2V0SL	1.9-2.1	5	100	600	1	90	1.0	/	L1.
BZT52C2V2SL	2.09-2.31	5	100	600	1	90	1.0	/	L2.
BZT52C2V4SL	2.28-2.52	5	85	600	1	50	1.0	/	L3.
BZT52C2V7SL	2.57-2.84	5	85	600	1	10	1.0	/	LT1.
BZT52C3V0SL	2.85-3.15	5	85	600	1	4	1.0	/	LT2.
BZT52C3V3SL	3.14-3.47	5	85	600	1	2	1.0	/	LT3.
BZT52C3V6SL	3.42-3.78	5	85	600	1	2	1.0	/	LT4.
BZT52C3V9SL	3.71-4.10	5	85	600	1	2	1.0	/	LT5.
BZT52C4V3SL	4.09-4.52	5	80	600	1	1	1.0	/	LT6.
BZT52C4V7SL	4.47-4.94	5	70	500	1	0.5	1.0	/	LT7.
BZT52C5V1SL	4.85-5.36	5	50	480	1	0.1	1.0	/	LT8.
BZT52C5V6SL	5.32-5.88	5	30	400	1	0.1	1.0	25	LT9.
BZT52C6V2SL	5.89-6.51	5	10	150	1	0.1	2.0	25	L09.
BZT52C6V8SL	6.46-7.14	5	8	80	1	0.1	3.0	25	L10.
BZT52C7V5SL	7.13-7.88	5	7	50	1	0.1	5.0	25	L11.
BZT52C8V2SL	7.79-8.61	5	7	50	1	0.1	6.1	25	L13.
BZT52C9V1SL	8.65-9.56	5	10	50	1	0.1	6.8	25	L14.
BZT52C10SL	9.50-10.50	5	15	70	1	0.1	7.5	25	L15.
BZT52C11SL	10.45-11.55	5	20	70	1	0.1	8.2	25	L16.
BZT52C12SL	11.40-12.60	5	20	90	1	0.1	9.0	25	L17.
BZT52C13SL	12.40-13.65	5	26	110	1	0.1	9.7	25	L18.
BZT52C15SL	14.25-15.60	5	30	110	1	0.1	11.0	25	L19.
BZT52C16SL	15.30-16.80	5	40	170	1	0.1	12.0	25	L20.
BZT52C18SL	17.10-18.90	5	45	170	1	0.1	14.0	25	L21.
BZT52C20SL	19.00-21.00	5	55	220	1	0.1	15.0	25	L22.
BZT52C22SL	20.90-23.10	5	55	220	1	0.1	17.0	25	L23.
BZT52C24SL	22.80-25.20	5	70	220	1	0.1	18.0	25	L24.
BZT52C27SL	25.65-28.38	5	80	220	1	0.1	20.0	25	L25.
BZT52C30SL	28.50-31.50	5	80	220	1	0.1	22.0	25	L26.
BZT52C33SL	31.35-34.65	5	80	220	1	0.1	24.0	25	L27.
BZT52C36SL	34.20-37.80	5	80	220	1	0.1	27.0	25	L28.
BZT52C39SL	37.05-40.95	5	90	500	1	0.1	29.0	25	L29.
BZT52C43SL	40.85-45.15	5	90	600	1	0.1	32.0	25	L30.
BZT52C47SL	44.65-49.35	5	110	700	1	0.1	35.0	25	L31.

Note :

2. Short duration test pulse used to minimize self-heating effect.
3. f=1KHz.

Curve Characteristics

Fig. 1 - Typical Zener Breakdown Characteristics

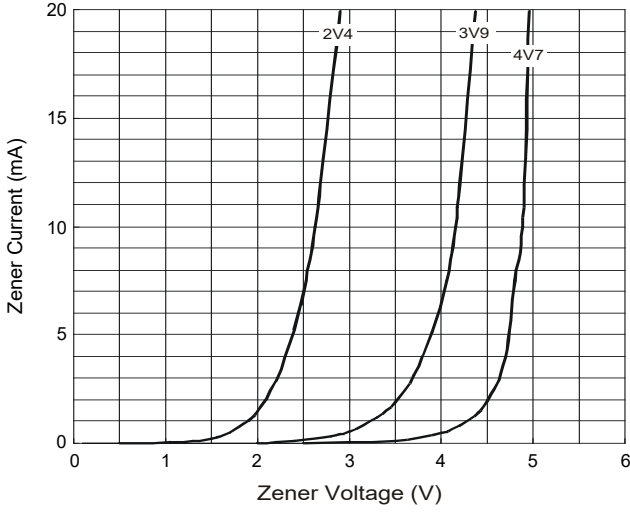


Fig. 2 - Typical Zener Breakdown Characteristics

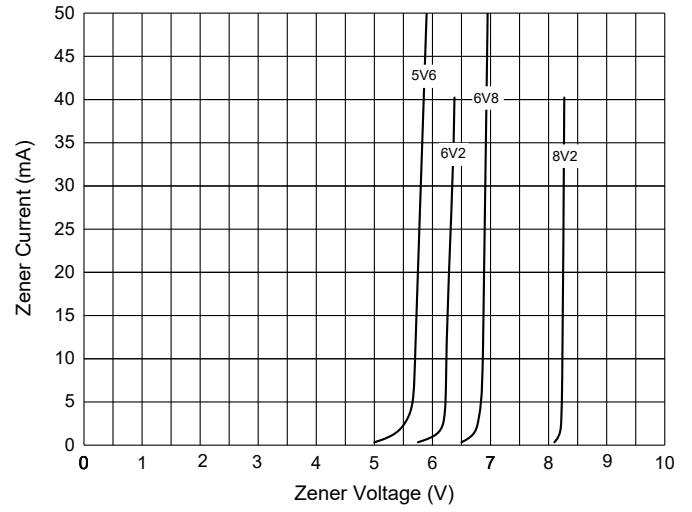


Fig. 3 - Typical Zener Breakdown Characteristics

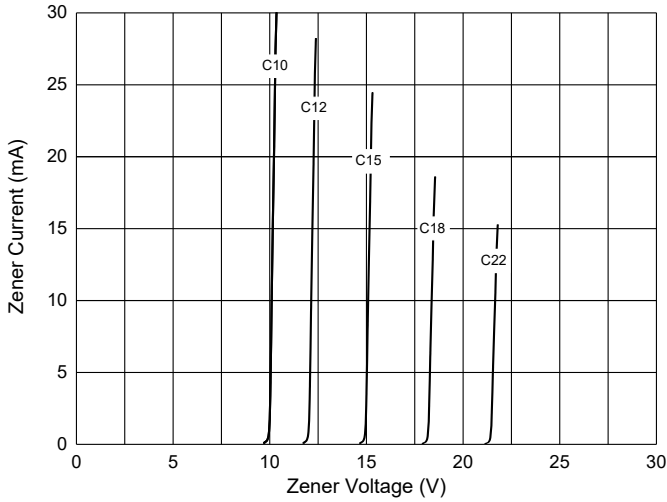


Fig. 4 - Typical Zener Breakdown Characteristics

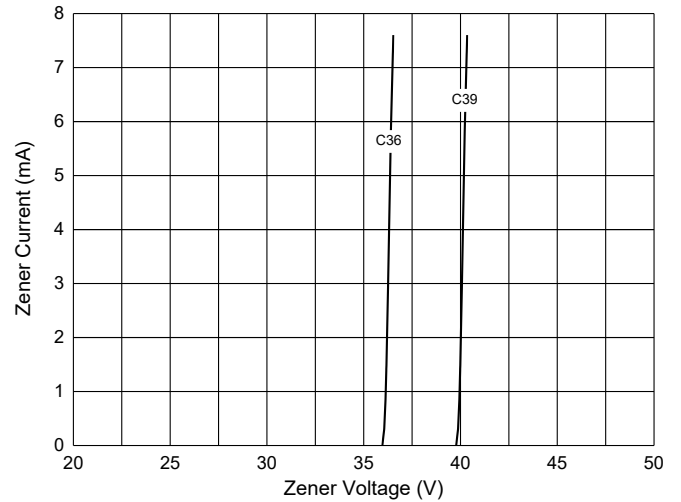


Fig. 5 - Typical Forward Characteristics


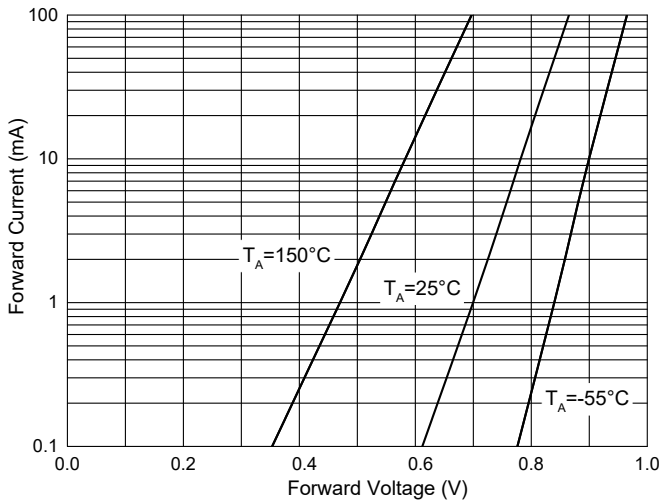


Fig. 6 - Power Derating Curve

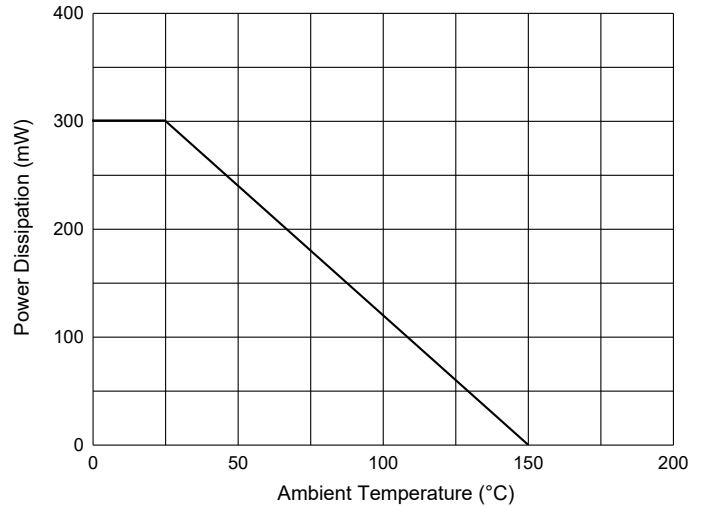

Ordering Information

Device	Packing
Part Number-TP	Tape&Reel:8Kpcs/Reel

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

*****LIFE SUPPORT*****

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

*****CUSTOMER AWARENESS*****

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Micro Commercial Components \(MCC\):](#)

[BZT52C11SL-TP](#) [BZT52C9V1SL-TP](#) [BZT52C2V7SL-TP](#) [BZT52C20SL-TP](#) [BZT52C24SL-TP](#) [BZT52C4V7SL-TP](#)
[BZT52C16SL-TP](#) [BZT52C2V2SL-TP](#) [BZT52C18SL-TP](#) [BZT52C43SL-TP](#) [BZT52C12SL-TP](#) [BZT52C15SL-TP](#)
[BZT52C6V2SL-TP](#) [BZT52C22SL-TP](#) [BZT52C3V3SL-TP](#) [BZT52C47SL-TP](#) [BZT52C33SL-TP](#) [BZT52C7V5SL-TP](#)
[BZT52C6V8SL-TP](#) [BZT52C30SL-TP](#) [BZT52C39SL-TP](#) [BZT52C8V2SL-TP](#) [BZT52C2V0SL-TP](#) [BZT52C3V9SL-TP](#)
[BZT52C10SL-TP](#) [BZT52C2V4SL-TP](#) [BZT52C5V1SL-TP](#) [BZT52C13SL-TP](#) [BZT52C5V6SL-TP](#) [BZT52C27SL-TP](#)
[BZT52C3V0SL-TP](#) [BZT52C3V6SL-TP](#) [BZT52C36SL-TP](#) [BZT52C4V3SL-TP](#)