

PIR 2 Click



PID: MIKROE-6052

PIR 2 Click is a compact add-on board designed for high-performance motion detection applications. This board features the [ZSLM323511](#), a dual-element balanced differential pyroelectric (PIR) sensor from Zilog. Key features include excellent EMI immunity, a low-profile surface mount package, and a typical field of view of 150 degrees on the X-axis and 139 degrees on the Y-axis. The board also integrates the ZCWM05GIV1 PIR lens for maximum IR transmissivity. Ideal for security systems, lighting control, and video doorbells, PIR 2 Click ensures reliable motion detection in various demanding environments.

How does it work?

PIR 2 Click is based on the ZSLM323511, a dual-element balanced differential pyroelectric (PIR) sensor from Zilog. Designed for high performance and excellent EMI immunity, this sensor is ideal for demanding motion detection applications such as security/intrusion motion detectors, lighting control, video doorbells, and many more. The ZSLM323511 features a low-profile surface mount package compatible with IR reflow processes. It includes two sensing elements behind a spectral filter window tuned to an 8-13um wavelength, blocking out unwanted IR energy sources. With a 0.6mm element spacing, it provides additional white light protection and a typical field of view of 150 degrees from the center of the element on the X-axis and 139 degrees on the Y-axis.

Mikroe produces entire development toolchains for all major microcontroller architectures.


Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

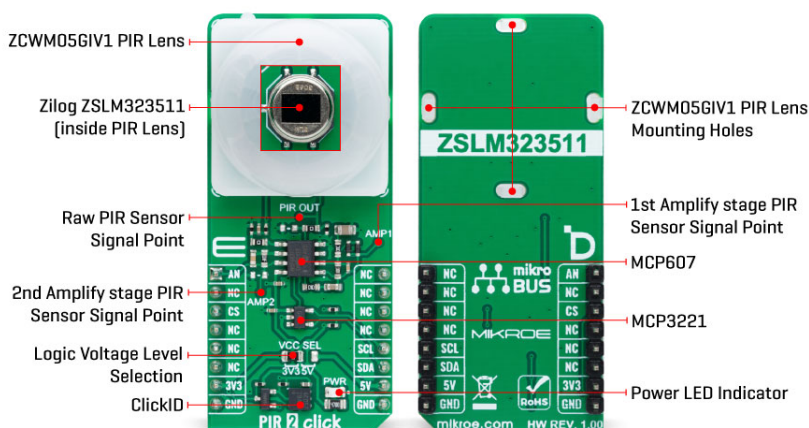

Combined with the ZSLM323511, the PIR 2 Click also integrates the ZCWM05GIV1 PIR lens, made from high-density polyethylene. This lens ensures maximum IR transmissivity with well-defined beam patterns. It clips directly into the Click board over the ZSLM323511 sensor, simplifying mechanical design.

The MCP607, a micropower CMOS operational amplifier from Microchip, processes the ZSLM323511 raw sensor output. This unity-gain stable, low offset voltage OpAmp features rail-to-rail output swing capability and low input bias current. The buffered signal can be then converted to a digital value using the MCP3221, a 12-bit resolution successive approximation A/D converter with a 2-wire I2C compatible interface, or it can be sent directly to an analog pin of the mikroBUS™ socket labeled as AN. Additionally, the board allows for signal monitoring at every process stage via test points, from the raw PIR sensor signal on PIR OUT to the amplified signal stages at AMP1 and AMP2 test points.

This Click board™ can operate with either 3.3V or 5V logic voltage levels selected via the VCC SEL jumper. This way, both 3.3V and 5V capable MCUs can use the communication lines properly. Also, this Click board™ comes equipped with a library containing easy-to-use functions and an example code that can be used as a reference for further development.

Specifications

Type	Motion
Applications	Ideal for security systems, lighting control, video doorbells, and more
On-board modules	ZSLM323511 - dual-element balanced differential pyroelectric (PIR) sensor from Zilog
Key Features	High performance, excellent EMI immunity, two sensing elements behind a spectral filter window, tuned to an 8-13um wavelength for blocking unwanted IR energy, 0.6mm element spacing for additional white light protection, typical field of view 150deg on the X- and 139 on Y-axis, integrated the ZCWM05GIV1 PIR lens for maximum IR transmissivity, output options between analog or digital processing, test points for signal monitoring throughout

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
 ISO 14001: 2015 certification of environmental management system.
 OHSAS 18001: 2008 certification of occupational health and safety management system.




ISO 9001: 2015 certification of quality management system (QMS).

	the process stages, and more
Interface	Analog,I2C
Feature	ClickID
Compatibility	mikroBUS™
Click board size	L (57.15 x 25.4 mm)
Input Voltage	3.3V or 5V

Pinout diagram

This table shows how the pinout on PIR 2 Click corresponds to the pinout on the mikroBUS™ socket (the latter shown in the two middle columns).

Notes	Pin					Pin	Notes
Analog Output	AN	1	AN	PWM	16	NC	
	NC	2	RST	INT	15	NC	
ID COMM	CS	3	CS	RX	14	NC	
	NC	4	SCK	TX	13	NC	
	NC	5	MISO	SCL	12	SCL	I2C Clock
	NC	6	MOSI	SDA	11	SDA	I2C Data
Power Supply	3.3V	7	3.3V	5V	10	5V	Power Supply
Ground	GND	8	GND	GND	9	GND	Ground

Onboard settings and indicators

Label	Name	Default	Description
LD1	PWR	-	Power LED Indicator
JP1	VCC SEL	Left	Power Voltage Level Selection 3V3/5V: Left position 3V3, Right position 5V

PIR 2 Click electrical specifications

Description	Min	Typ	Max	Unit
Supply Voltage	3.3	-	5	V
Field of View - X-axis	-	150	-	deg
Field of View - Y-axis	-	139	-	deg

Software Support

We provide a library for the PIR 2 Click as well as a demo application (example), developed using MIKROE [compilers](#). The demo can run on all the main MIKROE [development boards](#).

Package can be downloaded/installed directly from NECTO Studio Package Manager(recommended), downloaded from our [LibStock™](#) or found on [MIKROE github account](#).

Library Description

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

This library contains API for PIR 2 Click driver.

Key functions

- `pir2_read_raw_adc` This function reads raw ADC value.
- `pir2_read_voltage` This function reads raw ADC value and converts it to proportional voltage level.
- `pir2_set_vref` This function sets the voltage reference for PIR 2 click driver.

Example Description

This example demonstrates the use of PIR 2 Click boards.

The full application code, and ready to use projects can be installed directly from NECTO Studio Package Manager(recommended), downloaded from our [LibStock™](#) or found on [MIKROE github account](#).

Other MIKROE Libraries used in the example:

- MikroSDK.Board
- MikroSDK.Log
- Click.PIR2

Additional notes and informations

Depending on the development board you are using, you may need [USB UART click](#), [USB UART 2 Click](#) or [RS232 Click](#) to connect to your PC, for development systems with no UART to USB interface available on the board. UART terminal is available in all MIKROE [compilers](#).

mikroSDK

This Click board™ is supported with [mikroSDK](#) - MIKROE Software Development Kit. To ensure proper operation of mikroSDK compliant Click board™ demo applications, mikroSDK should be downloaded from the [LibStock](#) and installed for the compiler you are using.

For more information about mikroSDK, visit the [official page](#).

Resources

[mikroBUS™](#)

[mikroSDK](#)

[Click board™ Catalog](#)

[Click boards™](#)

[ClickID](#)

Downloads

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

[MCP607 datasheet](#)

[MCP3221 datasheet](#)

[PIR 2 click example on Libstock](#)

[PIR 2 click 2D and 3D files v100](#)

[ZSLM323511 Datasheet](#)

[ZCWM05GIV1 Datasheet](#)

[PIR 2 click schematic v100](#)

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mikroe:](#)

[MIKROE-6052](#)