

CVM1 Series

CVM1 Duplex

The CVM1D Duplex system's redundancy is a new option in Omron's large controllers. Two redundant CPUs and power supplies ensure that processes will continue operation when a failure occurs. This makes the CVM1D ideal for critical control system applications. Besides its redundancy, the CVM1D has several enhanced features of the CV/CVM1 Series, including a higher level of performance, communications, and networking.




- **Redundant CPUs**
- **Redundant power supplies**
- **Hot standby simultaneous processing**
- **Replace a CPU, power supply, and I/O modules on-line**
- **Synchronized program execution and switching functions**
- **Supports existing CVM1, C500, CV500 and 3G2A5 I/O modules**
- **High speed 0.125 μ s processing**
- **Large 62K-word program and 24K-word data memory capacity**
- **Meets UL/CSA/CE standards**
- **275 instructions (500 variations)**
- **Supports various software tools and programming devices**
- **Duplex and simplex modes**

Duplex and Simplex Operation

Duplex System (DPL)

CVM1D CPU rack is equipped with:

1. Two CPUs
 - One active CPU controlling the system
 - One standby CPU operating in parallel with the active CPU
2. A duplex unit that monitors errors in the two CPUs, switches the CPU, I/O, and peripheral buses to the standby CPU if an error occurs in the active CPU
3. Two power supplies operating simultaneously

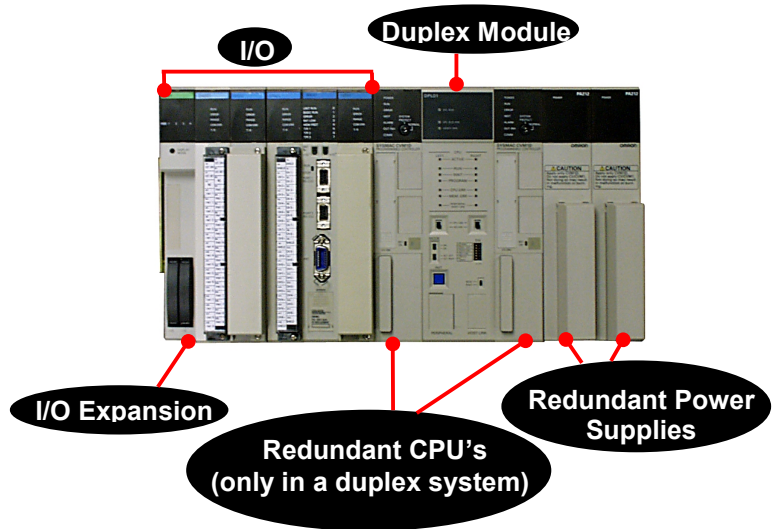

Simplex System (SPL)


CVM1D CPU Rack is equipped with:

1. One CPU to control the system
2. A duplex unit that primarily operates the duplex system. It also performs other functions including I/O bus switching.
3. Two power supplies operating simultaneously


System Configuration

1. Basic System with a CVM1D CPU rack and expansion I/O racks
 - Uses up to 5 “CPU bus” modules (units).
 - Uses redundant power supplies.
 - I/O Modules can be replaced online.
2. System with a CVM1D CPU rack, expansion CPU rack, and expansion I/O racks**
 - Uses up to 15 “CPU Bus” modules (units).
 - Uses redundant power supplies.
 - I/O Modules can be replaced online.
3. System with a CVM1D CPU rack, CVM1 or CV-series expansion CPU rack, and CVM1 or CV-series expansion I/O racks
 - Demonstrates how to convert an existing CVM1 or CV-series system to a duplex system
 - Uses redundant power supplies
 - I/O modules can be replaced online in the CPU Rack. (Supported by the CVM1 or CV-series racks.)
 - CVM1 or CV-series expansion I/O racks without I/O interface units cannot be connected.
4. System with a CVM1D CPU rack and C-series expansion I/O racks
 - Demonstrates how to upgrade an existing C2000H duplex system to a CVM1D Duplex system.
 - Uses redundant power supplies.
 - I/O modules can be replaced online in the CPU rack, but not the C-series racks.
 - C-series racks cannot be combined with CVM1 or CV-series expansion I/O racks.

**Example of a Duplex System with an Expansion CPU Rack

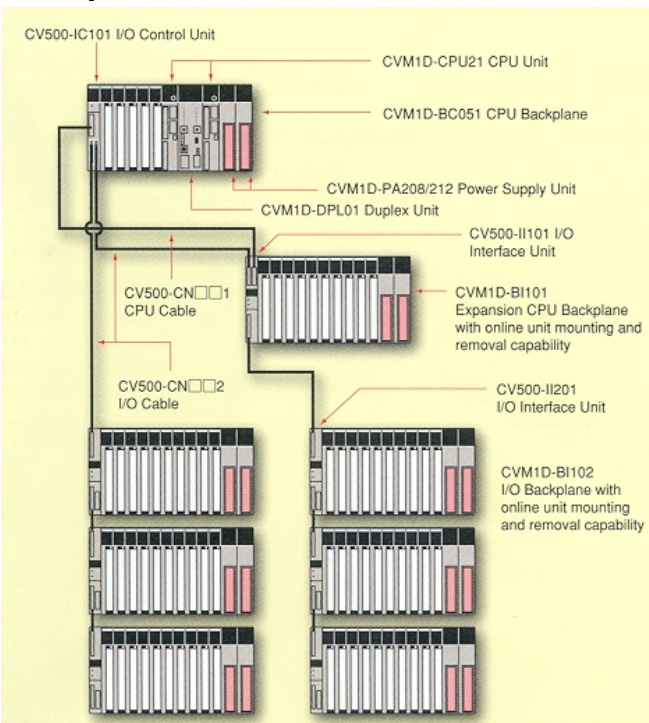

The following diagram shows the communications networks supported by CVM1D Controllers.

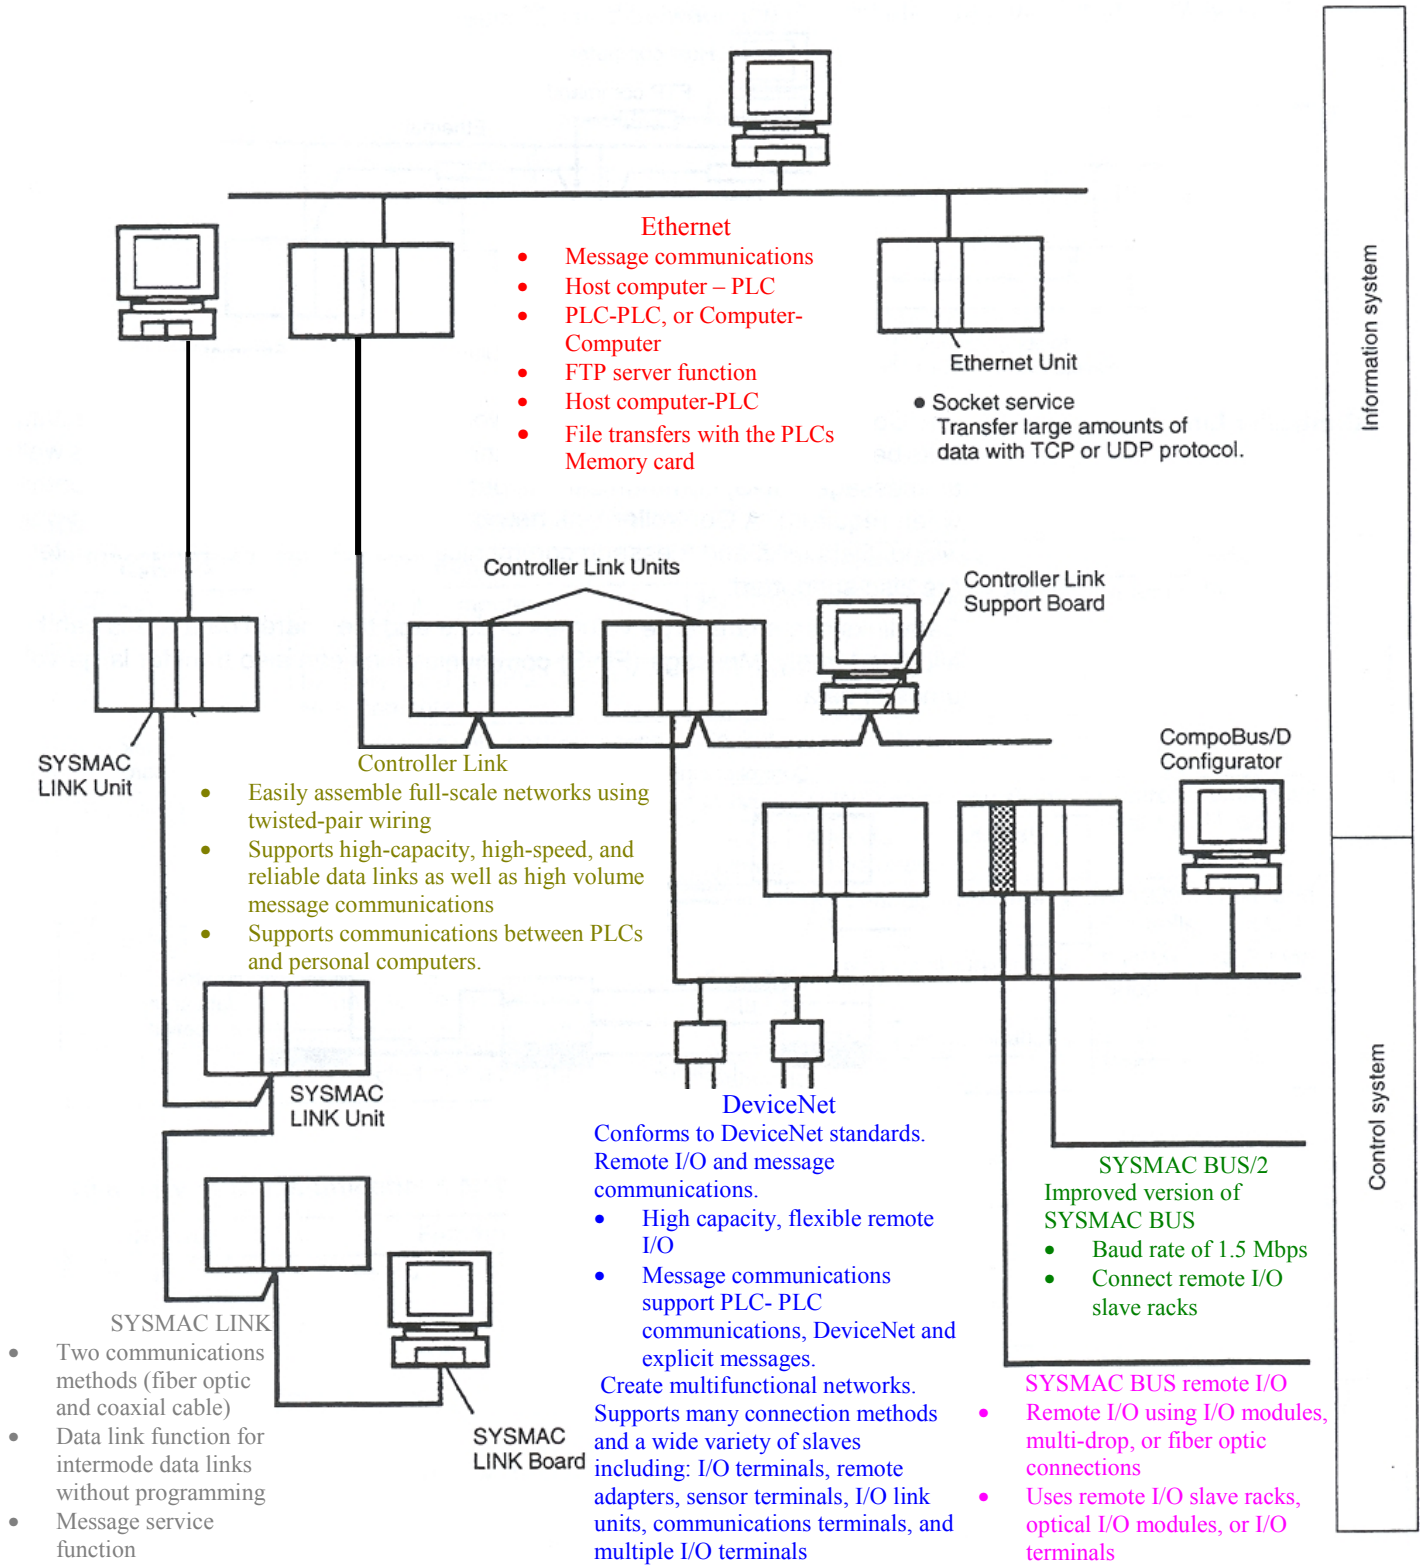

Summary of Communications Networks: Information Level Communications

Network	Function	Communications	Supporting Devices
Ethernet	PLC ⇔ Host Computer	Message (FINS) communications	Ethernet unit
	PLC ⇔ PLC	Message (FINS) communications	
	Memory Card in CPU Unit ⇔ Host Computer	File Transfer Protocol (FTP) server function	
	Socket service function	TCP/IP and UDP/IP	
Controller Link	PLC ⇔ Computer directly connected to the network	Message (FINS) communications	Controller Link support board and snit
		Data link (Offsets and automatic settings can be used.)	
RS-232C to Controller Link	Host computer and PLCs in the network	Host link commands and gateway functions	RS-232C cable and Controller Link unit
SYSMAC LINK	PLC ⇔ Computer directly connected to the network	Message (FINS) communications	SYSMAC LINK Support board and unit
		Data Link	

Summary of Communications Networks: Control Level Communications

Network	Function	Communications	Devices
Controller Link	PLC ⇔ PLC	Message (FINS) communications	Controller Link Unit
		Data link (Offsets and automatic settings can be used.)	
PC Link	PLC ⇔ PLC	Automatic data link	PC Link Unit
DeviceNet	PLC ⇔ PLC	Open network message (FINS) communications	DeviceNet Master Unit and Configurator
SYSMAC LINK	PLC ⇔ PLC	Message (FINS) communications	SYSMAC LINK Unit
		Data Link	

SPECIFICATIONS

CVM1 Duplex

Item		Specification	
Power Supply		CVM1D-PA208	CVM1D-PA212
Input-Power Supply	Rated Voltage	100 to 120 or 200 to 240 VAC (automatic voltage setting)	
	Frequency	50/60 Hz \pm 5%	
	Operating Voltage Range	85 to 132 or 170 to 264 VAC	
Power Consumption		150VA max.	200VA max.
Inrush Current		30A max.	
Output Capacity		8A	12A
Overcurrent Protection		105% min.	
Overvoltage Protection		6V min.	
Grounding		Less than 100 Ω	
Enclosure		Mounted in panel	
Weight		0.9 kg	
Dimensions (mm) L x W x H		250 x 47 x 116 max. *	
Terminal Screw Size		M3.5	
Applicable Mounting Torque		0.8N m (8.1 kgf cm)	
Applicable Crimp Terminal		1.25 to YS3A, VD1.25 to 3.5	
Applicable Wire		0.25 to 1.65 mm ²	
Insulation Resistance		20M Ω min. (at 500 VDC) between AC external terminals and GR terminals	
Dielectric Strength		2,300 VAC 50/60 Hz for 1 min between AC external and GR terminals, leakage current: 10mA max.	
Noise Immunity		1,500 Vp-p, pulse width: 100ns to 1 μ s, rise time: 1ns (via noise simulation)	
Vibration Resistance		10 to 57Hz, 0.075mm amplitude, 57 to 150Hz, acceleration: 1 G in X, Y and Z directions for 80 minutes (time coefficient: 8 minutes x coefficient factor 10 = total time of 80 minutes) (according to JIS C0911)	
Shock Resistance		15G 3 times each in the X, Y and Z directions (according to JIS C0912)	
External Input Signal		Start input	
External Output Signal		Output while PLC is operating	
Ambient Operating Temperature		0 to 55 °C	
Ambient Operating Humidity		10% to 90% (with no condensation)	
Atmosphere		Must be free of corrosive gases	
Ambient Storage Temperature		-25 to 75°C	
Mounting Location		CPU, CPU expansion, or I/O expansion backplanes	CPU, CPU expansion, or I/O expansion backplanes


*Depth dimensions may vary due to cabling and connections.

Item		Specification
CPU		CVM1D-CPU21 **
Control Method		Stored program
I/O Control Method		Cyclic refreshing
Programming		Ladder diagrams
Instruction Length		1 to 8 words/instruction, 1 address/instruction
Ladder Instruction		275 (500 variations)
Execution Time	Basic	0.125 to 0.375 μ s
	Special	0.5 to 8.25 μ s
Program Capacity		62K words
I/O Bits		2,048 (words 0000 to 0127)
Remote I/O Bits	SYSMAC BUS/2	2,048
	SYSBUS	2,048
Remote I/O Bits		SYSMAC BUS/2 : 12,800 (words 0200 to 999) SYSBUS : 4,096 (words 2300 to 2555)
Work Bits		1,152 (words 0128 to 0199) ----- 6,400 (words 1900 to 2299)
Link Bits		3,200 : 100000 to 119915 (words 1000 to 1199)
Holding Bits		4,800 : 120000 to 149915 (words 1200 to 1499)
CPU Bus Unit Bits		6,400 : 150000 to 189915 (words 1500 to 1899)
Temporary Bits		8 (TR0 to TR7)
CPU Bus Link Bits		4,096 : G00000 to 25515 (words G000 to 255)
Auxiliary Bits		8,192 : A00000 to 51115 (words A000 to 511)
Timers		1,024 bits (T0000 to 1023) ----- Timer : 0 to 999.9 s, High Speed Timer : 0 to 99.99 s
Counters		1,024 bits (C0000 to 1023) ----- 0 to 9999 counts
Data Memory		24K words (D00000 to 24575)
Expansion DM		256K words (E00000 to 32765 x 8 banks)
Data Registers		3 words (DR0 to DR2)
Index Registers		3 words (IR0 to IR2)
Trace Memory		2K words (non-synchronous processing)
File Memory		Memory cards : RAM, EEPROM, or EPROM
Control Input Signal		START input : RUN mode PC begins operating when input is ON and stops when it is OFF Input specifications : 24VDC, 10mA
Control Output Signal		RUN output : The RUN output terminals are ON (closed) while the PC is operating Maximum switching capacity : 250VAC/2A (resistive load), 24VDC/2A, 250VAC/0.5A (inductive load: cos ϕ = 0.4)
Memory Protection		Holding bits and contents of counters and data memory
Battery Life		Service life: 5 years The memory backup time when the PC is not powered varies with ambient temperature
Self-diagnostics		CPU failure (watchdog timer), I/O verify error, I/O bus error, memory failure, remote I/O error, battery error, link error, special I/O error, and others

** The CVM1D only operates in synchronous RUN mode.


- CPU Rack (Unit : mm)

The diagram below shows the rack without one power supply and an I/O control unit.

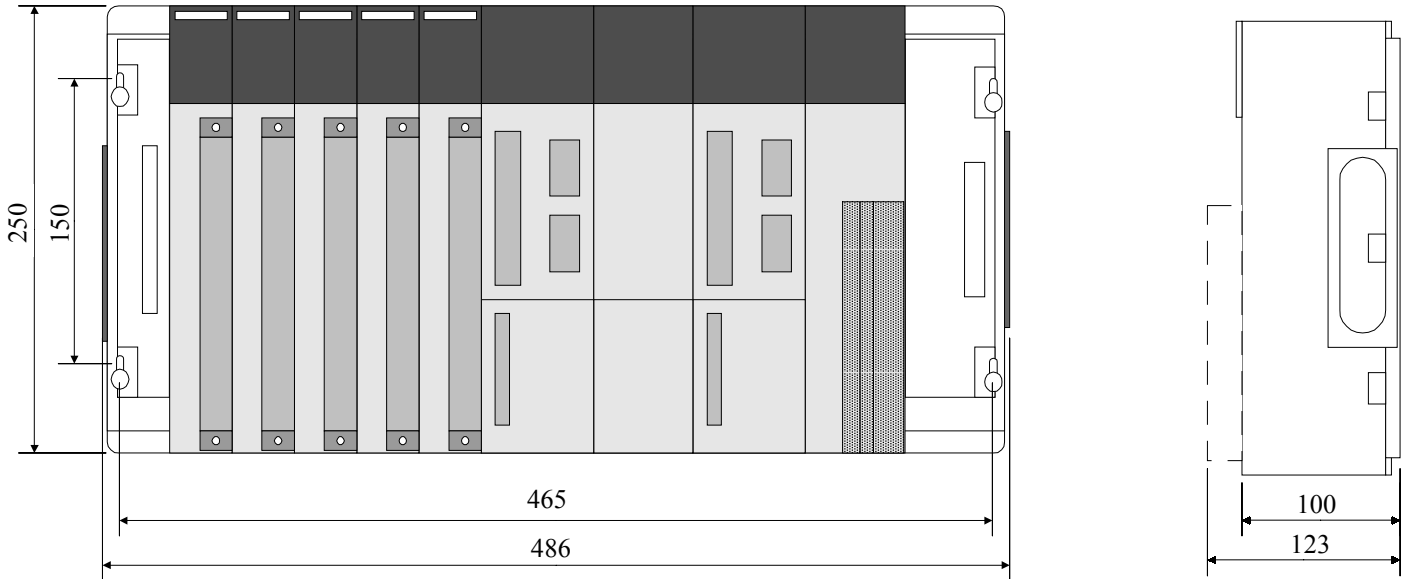

- Expansion CPU and Expansion I/O Racks (Unit : mm)

The diagram below shows the rack without one power supply and an I/O control unit.

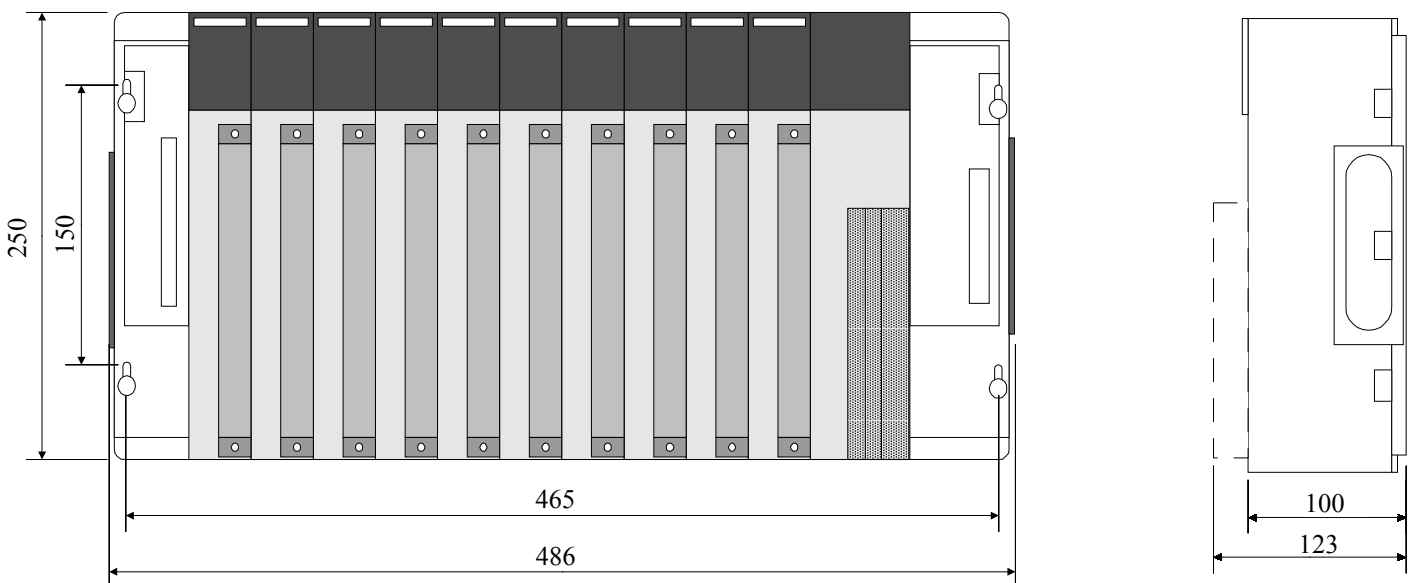

ORDERING INFORMATION

CVM1 Duplex

Description	Part Number	Standards
CVM1D CPU Two required for a duplex system	CVM1D-CPU21	UL, CSA, CE
Duplex Module Required in a simplex and duplex system	CVM1D-DPL01	UL, CSA, CE
CPU Backplane 5-slot	CVM1D-BC051	UL, CSA, CE
Expansion CPU Backplane 10-slot	CVM1D-BI101	UL, CSA, CE
Expansion I/O Backplane 10-slot	CVM1D-BI102	UL, CSA, CE
Power Supply 12A output capacity/85 to 135VAC operating voltage range *	CVM1D-PA208	UL, CSA, CE
Power Supply 8A output capacity/170 to 264VAC operating voltage range *	CVM1D-PA212	UL, CSA
Programming Console	CVM1-PRS21-EV1	UL, CSA, CE
CX-Programmer Software (Configure as CVM1-CPU21-V2 CPU) **	WS02-CXPC1-EV2.x	
Operation Manual	W351	
Installation Manual	W350	

* Requires 2 power supplies of the same type per backplane.

** SYSWIN, CX-Programmer, SYSMAC-CPT, SYSMAC Support Software (SSS), and CVSS can be used also.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Omron:](#)

[CVM1D-PA212](#)