

# HD Fusion Fiber Wall Mount Splice Enclosure

## specifications

The Fiber Optic Splice Enclosure shall house, organize, manage and protect cable to cable fusion splice connections. It shall accommodate large count fiber optic cables typically coming in from outside of the building transitioning to often smaller count cables within the data center. Splice trays can accommodate individual or ribbon fibers.



## technical information

<b>Part numbers:</b>	<b>FWMHSSGS-3456</b> fiber wall mount hyperscale splicing solution Grey, with split doors – 3,456 fibers <b>FWMHSSGS-6912</b> fiber wall mount hyperscale splicing solution Grey, with split doors – 6,912 fibers (Also available in White and Black – Change the G in the part number to a W for White or a B for Black)
<b>Mounting:</b>	Wall-mountable using 5/16" or M8 hardware Overhead mounting using M10 threaded rod Freestanding on floor using M10 leveling legs
<b>Material:</b>	Steel and plastic
<b>Dimensions:</b>	FWMHSSGS-3456: 24"x36"x15" (WxHxD) FWMHSSGS-6912: 48"x36"x15" (WxHxD)

## key features and benefits

- Splice trays have the ability to rotate to be easily viewed, even when fully populated
- Work surface stores on door when not in use, and easily removable to install onto enclosure
- Doors remove/install without tool; integrated document holder
- Cable management has the ability to shift left/right to provide additional workspace if needed
- Cable plates are removeable to provide additional access into enclosure during building
- Cover plate with 22.5mm, 51mm and 64mm cutouts
- Four cable gland accessory sizes for secure fiber ingress and egress.
- Cable plates have the ability to rotate 180 degrees, and move top/bottom or side/side to find correct cable entry/exit points
- Enclosure structure and doors are integrally grounded/bonded
- Multiple enclosures can be ganged together horizontally/vertically to 'pay as you grow'
- Optional storage box can be mounted to the top or bottom of enclosure to store unused fiber for future use

## applications

As large fiber count cables enter the data center, a need for fiber distribution products to manage these cables has become apparent. Cables are spliced to take large fiber count cables and break them down into manageable fiber count cables and/or to transition them into cable types that are appropriate for use inside the data center. Data centers deploy several different solutions to accomplish this. Below are some application examples:


- Building entrance facility/meet me Room
- Data center
- Hyperscale and co-location
- Telecommunications

# HD Fusion Fiber Wall Mount Splice Enclosure

## fiber capacity

Part Number	Description	Indiv. Fibers	Ribbon Fibers
<b>FWMHSSGS-3456</b>	Fiber wall mount hyperscale splicing solution Grey, split doors – 3,456 fibers	1,152	3,456
<b>FWMHSSGS-6912</b>	Fiber wall mount hyperscale splicing solution Grey, split doors – 6,912 fibers	2,304	6,912

(Also available in White and Black – change the G in the part number to a W for White or a B for Black.)

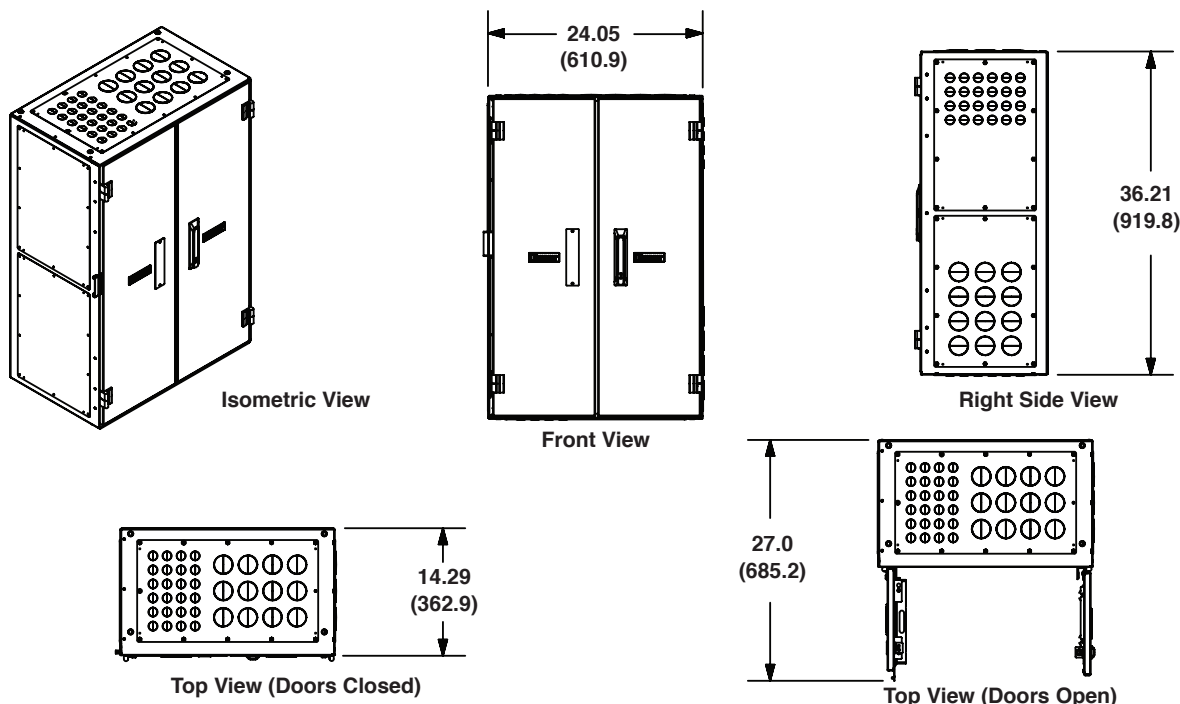

## accessories to be purchased separately

Part Numbers	Description
<b>FST144R</b>	Splicing tray for ribbon fibers up to 144.
<b>FST48</b>	Splicing tray for single fiber up to 48.
<b>FWMHSS*-ICB</b>	Incoming cable bracket to secure/support cables and routing within our splicing enclosures.
<b>FWMHSS-CG613</b>	Cable gland handling cable sizes 6mm - 13mm. Required cutout diameter of 22.5mm (7/8")
<b>FWMHSS-CG1321**</b>	Cable gland handling cable sizes 13mm - 21mm. Required cutout diameter of 32mm (1 1/4")
<b>FWMHSS-CG2135</b>	Cable gland handling cable sizes 21mm - 35mm. Required cutout diameter of 51mm (2")
<b>FWMHSS-CG3448</b>	Cable gland handling cable sizes 34mm - 48mm. Required cutout diameter of 64mm (2 1/2")
<b>FBKSL-M05-KIT</b>	Breakout sleeve kit (24 sleeves) to secure the cable within the enclosure.
<b>SE25PSC-TR0</b>	Fray resistant expandable sleeving.
<b>FWMHSS-ICAK</b>	Incoming cable anchor kit.
<b>ACGK</b>	Armored cable grounding, armored cable grounding kit, #10 mech clamp.
<b>FWMHSS*-GROUND</b>	Ground kit.
<b>FWMHSS*-STOR</b>	Cable storage box.
<b>FLEX-CM12C</b>	HD Flex Rear Cable Manager (also compatible with the FWMHSS)
<b>FWMHSS*-12X32 KIT</b>	Top and Side Cover Kit with Qty-12: 32mm holes

\*Replace the asterisk (\*) with Black (B), Gray (G) or White (W)

\*\*Requires addition Panduit Part number FWMHSS\*-12X32 plate to fit this size cable gland

Dimensions are in inches (Dimensions in parentheses are metric).

### WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA  
Phone: 800.777.3300

PANDUIT EUROPE LTD.  
London, UK  
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.  
Republic of Singapore  
Phone: 65.6305.7575

PANDUIT JAPAN  
Tokyo, Japan  
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA  
Guadalajara, Mexico  
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.  
Victoria, Australia  
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to [www.panduit.com/warranty](http://www.panduit.com/warranty)

For more information

Visit us at [www.panduit.com](http://www.panduit.com)

Contact Customer Service by email: [cs@panduit.com](mailto:cs@panduit.com)  
or by phone: 800.777.3300

**PANDUIT®**

© 2023 Panduit Corp.  
ALL RIGHTS RESERVED.  
FBSP162--WW-ENG  
8/2023

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Panduit:](#)

[FWMHSS-CG2135](#) [FWMHSSG-STOR](#) [FWMHSSG-12X32](#) [FWMHSS-ICAK](#) [FWMHSSG-GROUND](#) [FWMHSS-](#)  
[CG613](#) [FWMHSS-CG3448](#) [FWMHSS-CG1321](#) [FWMHSSG-ICB](#)