
#### WWW.PHIHONG.COM

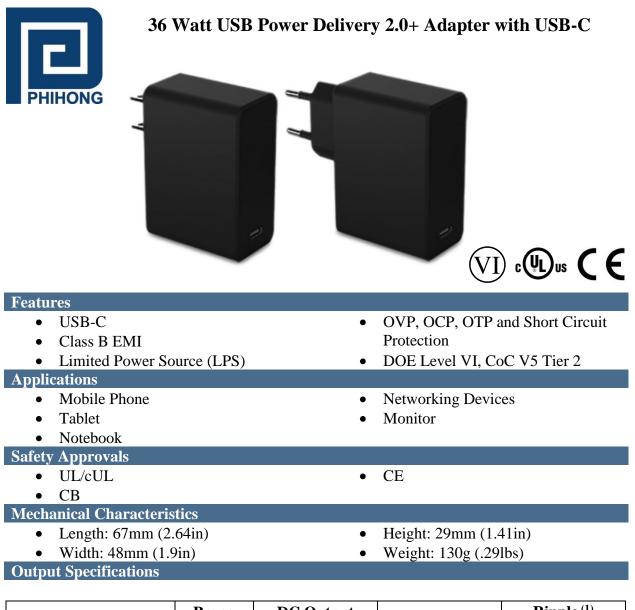

Model	Prong Style	DC Output Voltage	Current Rating	Ripple <sup>(1)</sup> P-P (max.)
AQ36A-59FA-H	US	5V/9V/15V	3A/3A/2.4A	200mV
AQ36E-59FA-H	EU	5V/9V/15V	3A/3A/2.4A	200mV

Notes: (1) Measured by using a 12 inch twisted pair terminated with a 10Uf & 0.1uF ceramic in parallel. Oscilloscope is set to 20MHz.

Phihong is not responsible for any error, and reserves the right to make changes without notice. Please visit our website at www.phihong.com for the most up-to-date specifications and contact information.

#### AQ36X-5CFA-H Characteristics

Input: AC Input Voltage Rating 100 to 240V AC

AC Input Voltage Range 90 to 264V AC

**AC Input Frequency** 50 to 60Hz

Input Current <0.9A (RMS) maximum at 90Vac @max load

Leakage Current 0.25mA Max.

Inrush Current 90Amax @240Vac/50Hz (Cold start)

Input Power Saving .075W max @230VAC /50Hz

#### **Output:**

Efficiency US DOE Level VI CoC V5 Tier 2

### **Environmental:**

Temperature Operation

Non-operation Humidity 0°C to +45°C -40°C to +85°C 90% RH max

DC Output Connector

USB Type C

#### WWW.PHIHONG.COM

Emissions

Complies with FCC Class B Complies with EN55032 Class B

Immunity

IEC61000-4-2: Level 2, Contact ±4KV, Criteria B Level 3, Air ±8KV, Criteria B Level 4, Contact ±8KV, Criteria C Level 4, Air ±15KV, Criteria C IEC61000-4-3, Level 2, Criteria A IEC61000-4-4, Level 2, Criteria B IEC61000-4-5, Level 3, Criteria B IEC61000-4-6, Level 2, Criteria A IEC61000-4-8, Level 1, Criteria A

Hold-up Time 10.3mS minimum at 110V/60Hz, Output 20V/2.25A

#### **Over-Voltage Protection**

<20V, shutdown mode

**Over-Temperature Protection** Shutdown mode


#### **Over-Current Protection**

Output current shall not exceed 4.5A@5V and 9V; 4A@15V


**Short-Circuit Protection** Auto Recover

**Dielectric Withstand (Hi-pot) Test** 


Primary to Secondary: 3000V AC for 1 min., 10mA



## AQ36A-59FA-H Dimension Diagram Unit: mm

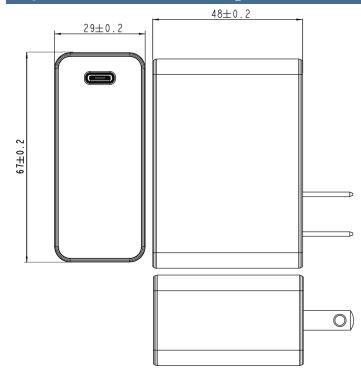

## AQ36E-59FA-H Dimension Diagram Unit: mm

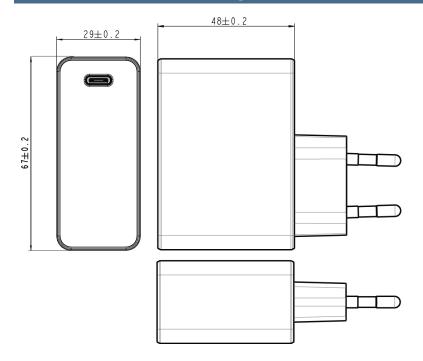

#### Supplier's Declaration of Conformity 47 CFR § 2.1077 Compliance Information

#### AQ36A-59FA-H

Phihong USA Corporation 47800 Fremont Boulevard Fremont, CA 94538 Telephone: (510) 445-0100 www.phihong.com

NOTE: This model has/The models in this products series have been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- -Reorient or relocate the receiving antenna.
- -Increase the separation between the equipment and receiver.
- -Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- -Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications to equipment not expressly approved by PHIHONG could void the user's authority to operate the equipment.

# **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

 Phihong:

 AQ36A-59FA
 AQ36E-59FA