

## Specification

Part No. : **GW.11.A113**  
Product Name : 2.4GHz 2.3dBi Terminal Mount Dipole Antenna  
Description : Hinged TPE Housing  
Connector: SMA(M)  
Length 84mm  
ROHS & REACH Compliant



## 1. Introduction

The GW.11 2.4 GHz dipole SMA terminal mount antenna is ideal for 2.4 GHz wireless applications such as Bluetooth and Wireless LAN. At only 84mm in length omnidirectional 2.3dBi gain across all bands ensures constant reception and transmission.

The antenna structure is designed for robust handling and the housing is made with TPE giving superior environmental reliability and a quality finish. The antenna can be rotated 90 degrees on the base hinge for ease of placement.

Many module manufacturers specify peak gain limits for any antennas that are to be connected to that module. Those peak gain limits are based on free-space conditions. In practice, the peak gain of an antenna tested in free-space can degrade by at least 1 or 2dBi when put inside a device. So ideally you should go for a slightly higher peak gain antenna than mentioned on the module specification to compensate for this effect, giving you better performance.

Upon testing of any of our antennas with your device and a selection of appropriate layout, integration technique, or cable, Taoglas can make sure any of our antennas' peak gain will be below the peak gain limits. Taoglas can then issue a specification and/or report for the selected antenna in your device that will clearly show it complying with the peak gain limits, so you can be assured you are meeting regulatory requirements for that module.

For example, a module manufacturer may state that the antenna must have less than 2dBi peak gain, but you don't need to select an embedded antenna that has a peak gain of less than 2dBi in free-space. This will give you a less optimized solution. It is better to go for a slightly higher free-space peak gain of 3dBi or more if available. Once that antenna gets integrated into your device, performance will degrade below this 2dBi peak gain due to the effects of GND plane, surrounding components, and device housing. If you want to be absolutely sure, contact Taoglas and we will test. Choosing a Taoglas antenna with a higher peak gain than what is specified by the

module manufacturer and enlisting our help will ensure you are getting the best performance possible without exceeding the peak gain limits.

It is better not to select an embedded antenna with very low free-space peak gain (<2dBi) directly, as this antenna would have worse performance in your device, and lead to compromised performance compared to using a Taoglas antenna.

Connector mount is fully customizable.


## 2.Specification Table

Parameter	ELECTRICAL			
Communication System	Bluetooth	Wi-Fi	ZigBee	2.4GHz ISM
	2401-2480	2412-2462	2410-2480	2400-2483.5
Peak Gain (dBi)*	2.3			
Average Gain (dBi)*	-0.88			
Efficiency (%)*	80%			
Return Loss (dB)*	- 10 dB Maximum			
Radiation	Omni-directional			
Polarization	Linear Vertical			
Power Handling	1W			
Impedance	50 Ω			
MECHANICAL				
Antenna Cover	TPE			
Antenna Base	PC & PBT			
Color	Black			
Connector	SMA(M)			
ENVIRONMENTAL				
Operation Temperature	-40°C ~ + 85°C			
Storage Temperature	-40°C ~ + 85°C			


\*The antenna was measured in free space

## 3. Antenna Characteristics


### 3.1 Return Loss

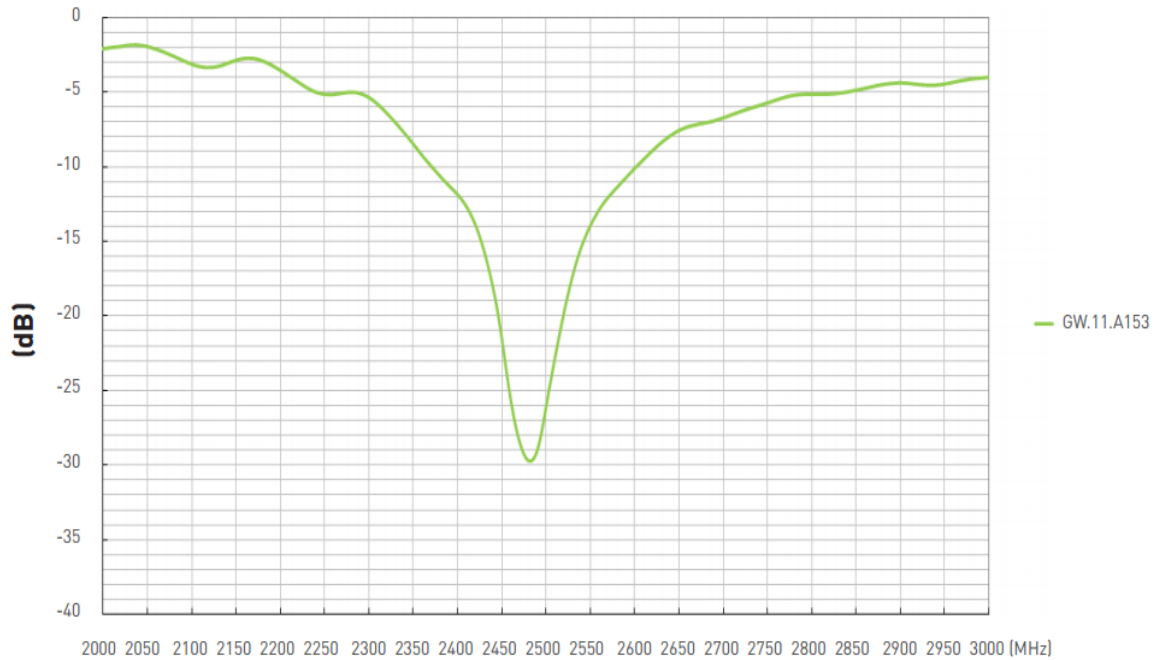


### 3.2 Peak Gain

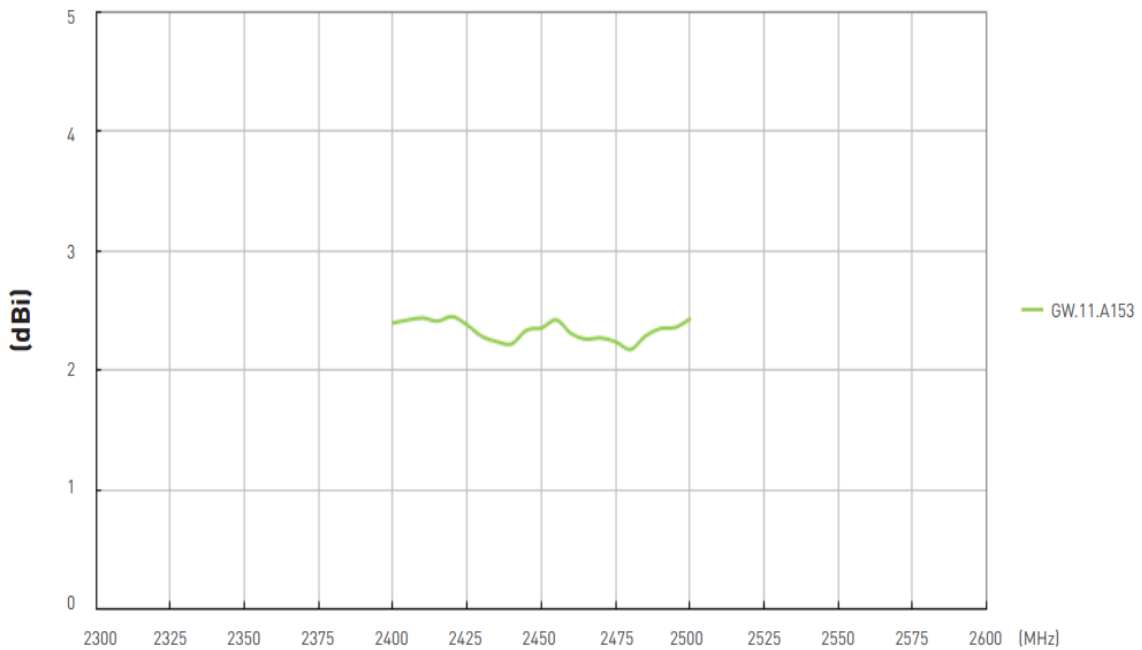

### 3.3 Average Gain

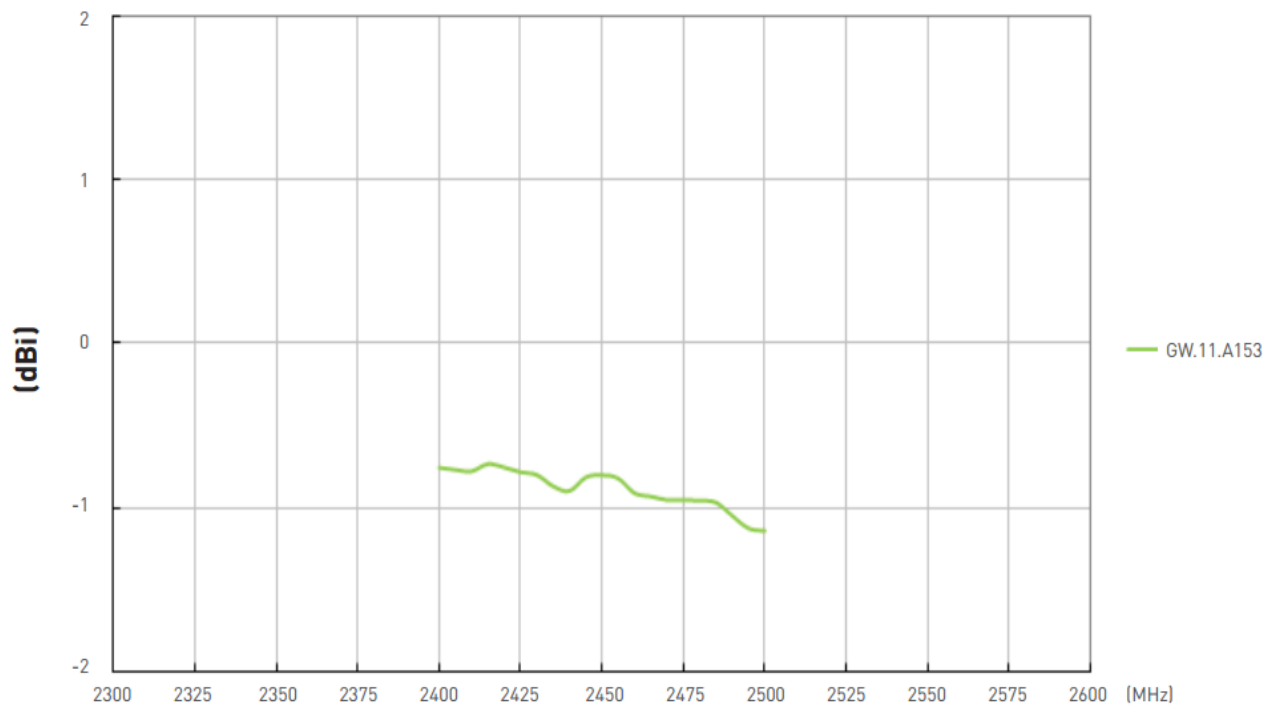

### 3.4 Efficiency

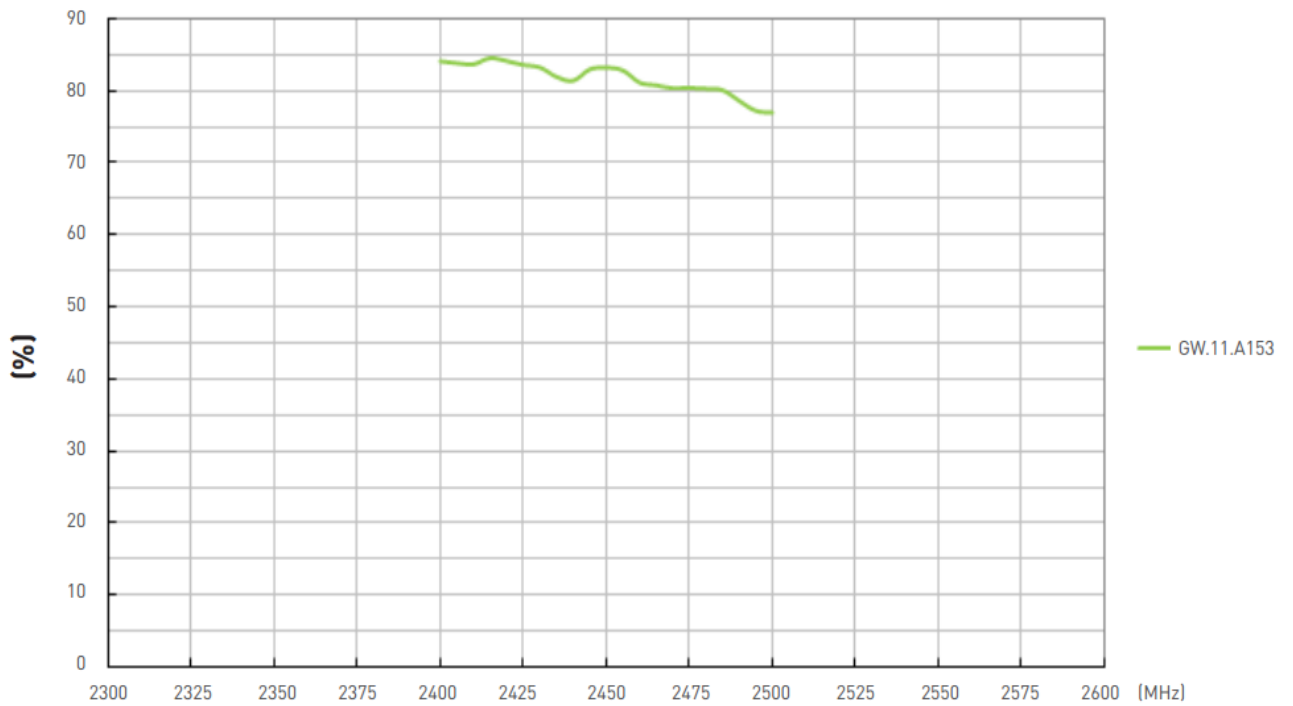


## 4. Radiation Patterns


The antenna radiation pattern was measured in ETS Anechoic Chamber.

The testing setup is as below.


The antenna was measured in free space.

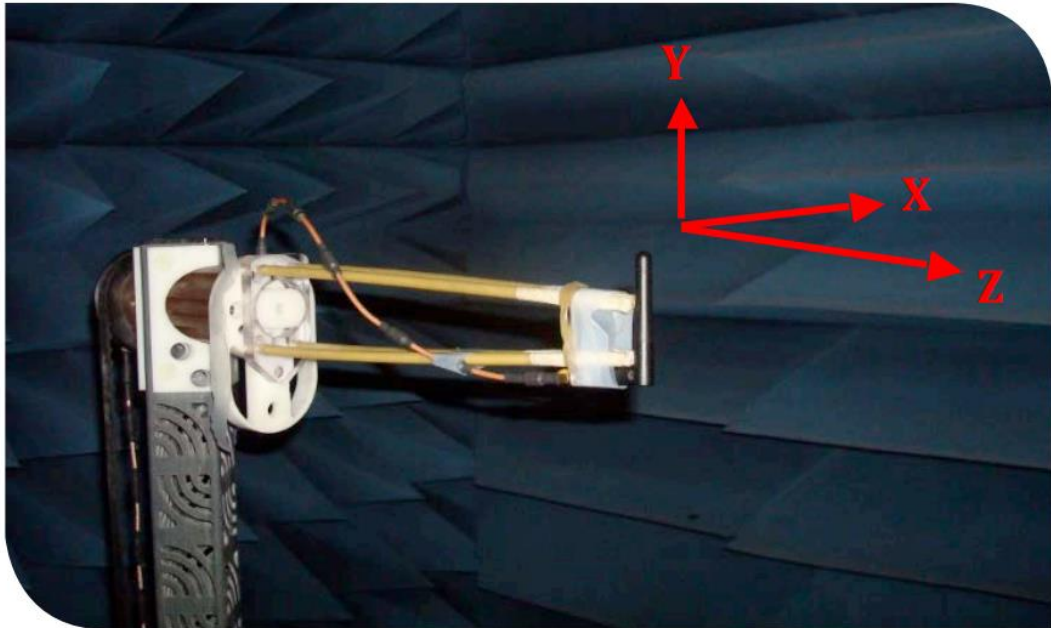


XY Plane

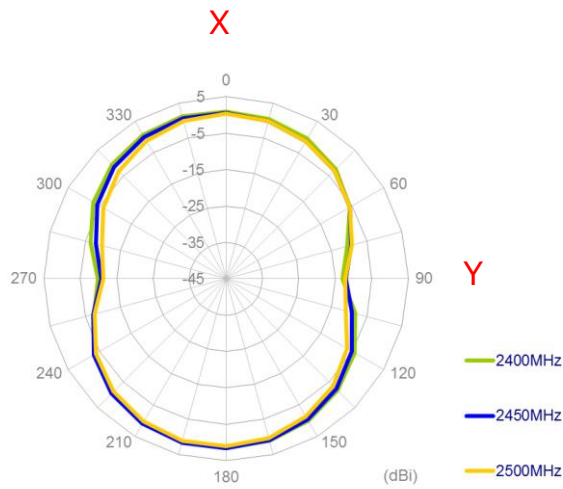

XZ Plane

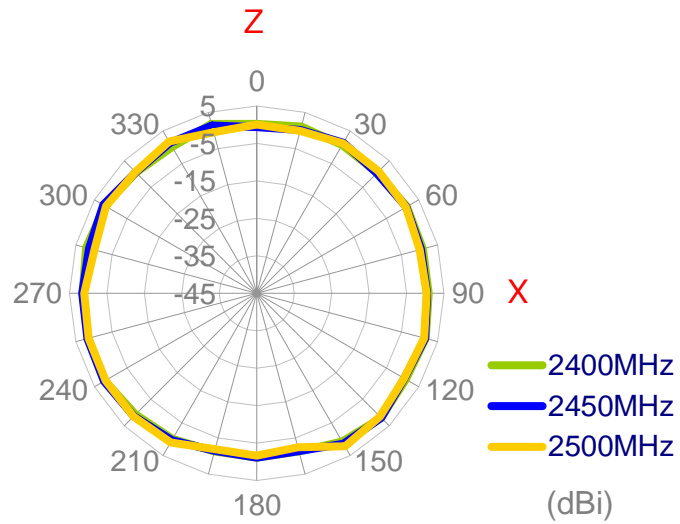


YZ Plane

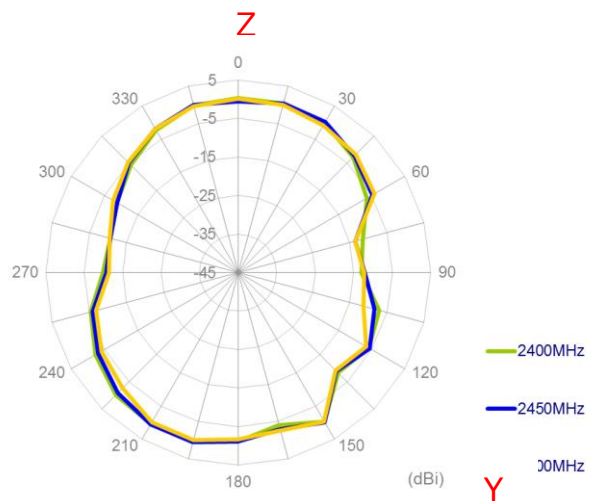



## 5. Drawing

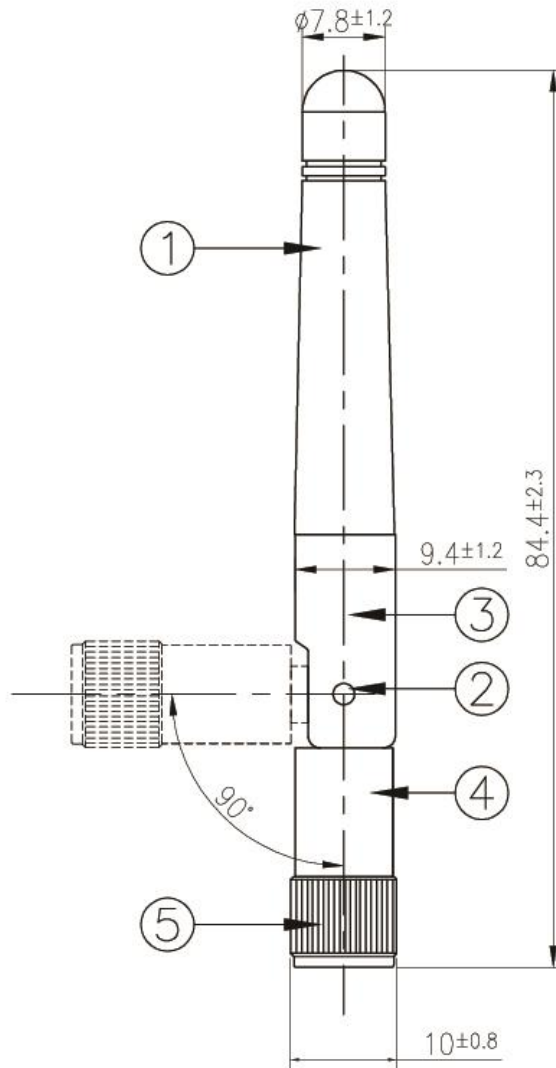


	Name	Material	Finish	QTY
1	Antenna Housing	TPEE	Black	1
2	Rotary Shaft	Brass,Cr	Black	1
3	Upper Base	PC+PBT	Black	1
4	Bottom Base	PC+PBT	Black	1
5	SMA(M) ST	PBT+Brass	Black	1

## 6. APPLICATION NOTE

### 6.1 The GW.11 antenna measurement setup (40mm\*60mm PCB board)

On the 30cmx30cm ground plane

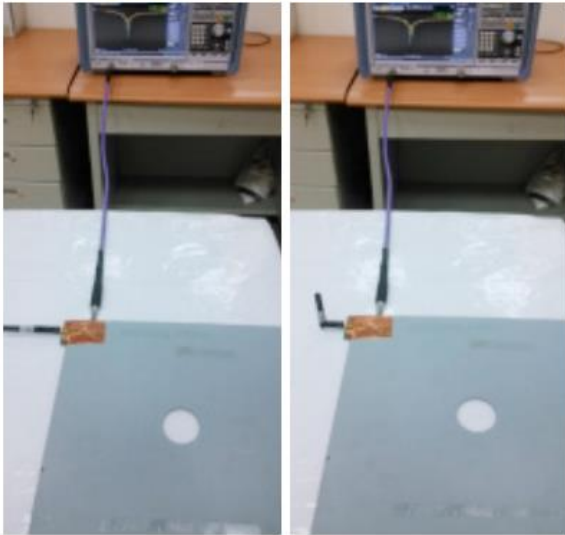

Antenna straight

Antenna R/A


On the 50cmx50cm ground



Antenna straight

Antenna R/A


On the short side

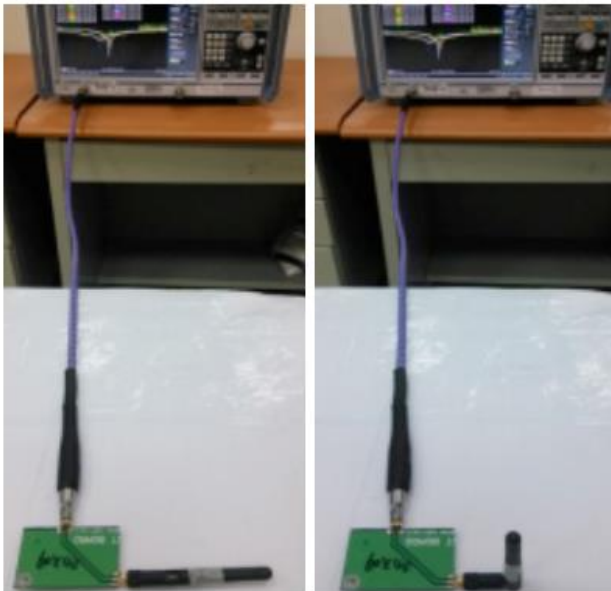

Antenna straight

Antenna R/A


On the long side

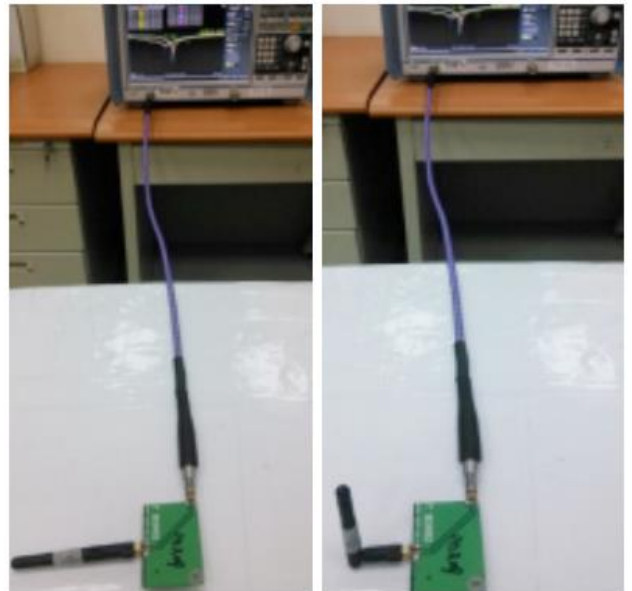

Antenna straight


Antenna R/A

## 6.2 Return Loss when antenna setup on different conditions

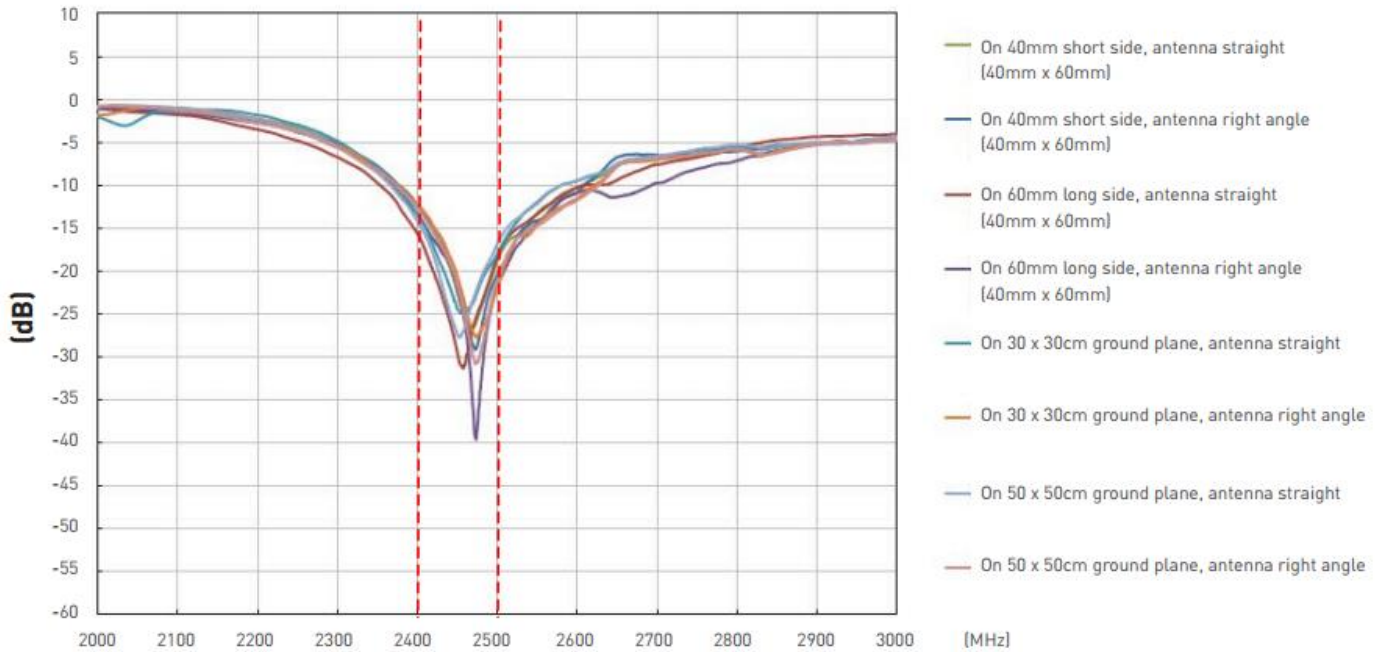

## 6.3 The GW.11 antenna measurement setup (40mmX100mm PCB board)


On the short side

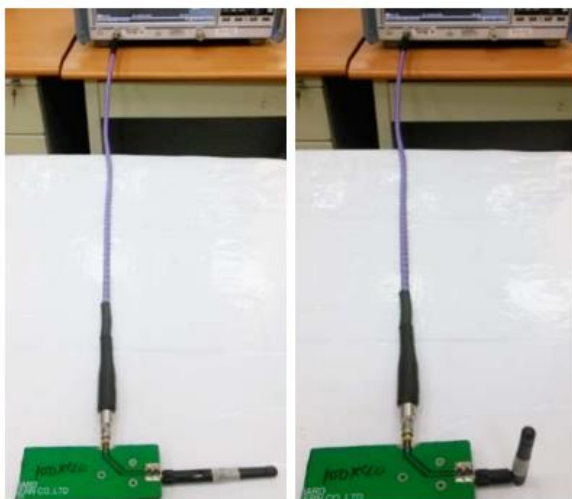

Antenna straight

Antenna R/A


On the long side

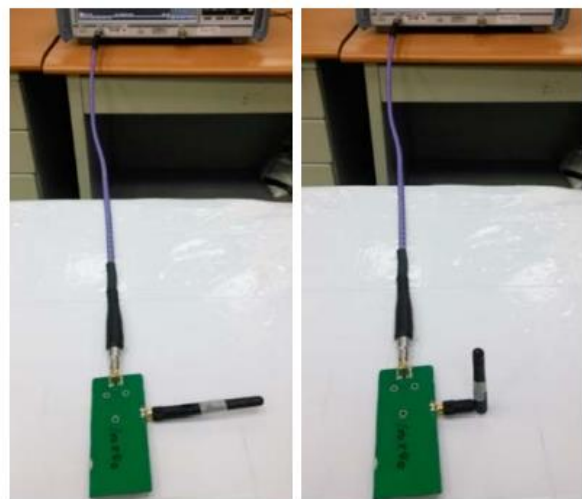


Antenna straight

Antenna R/A


## 6.4 Return Loss when antenna setup on different conditions

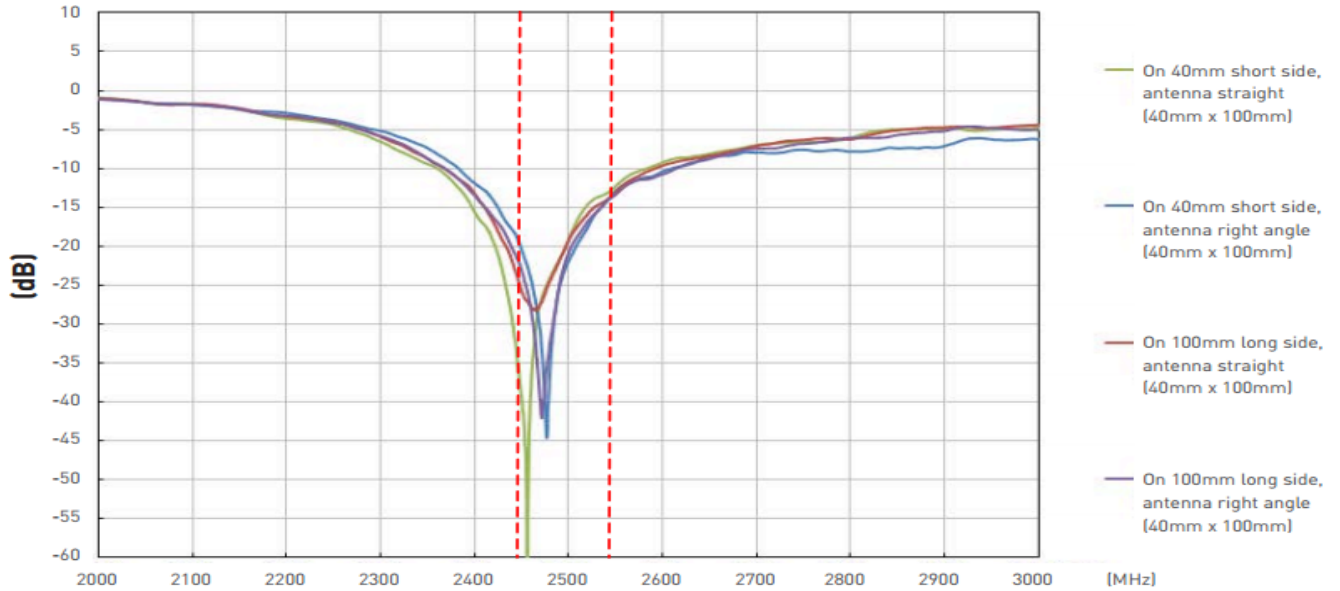

## 6.5 The GW.11 antenna measurement setup (90mmX150mm PCB board)

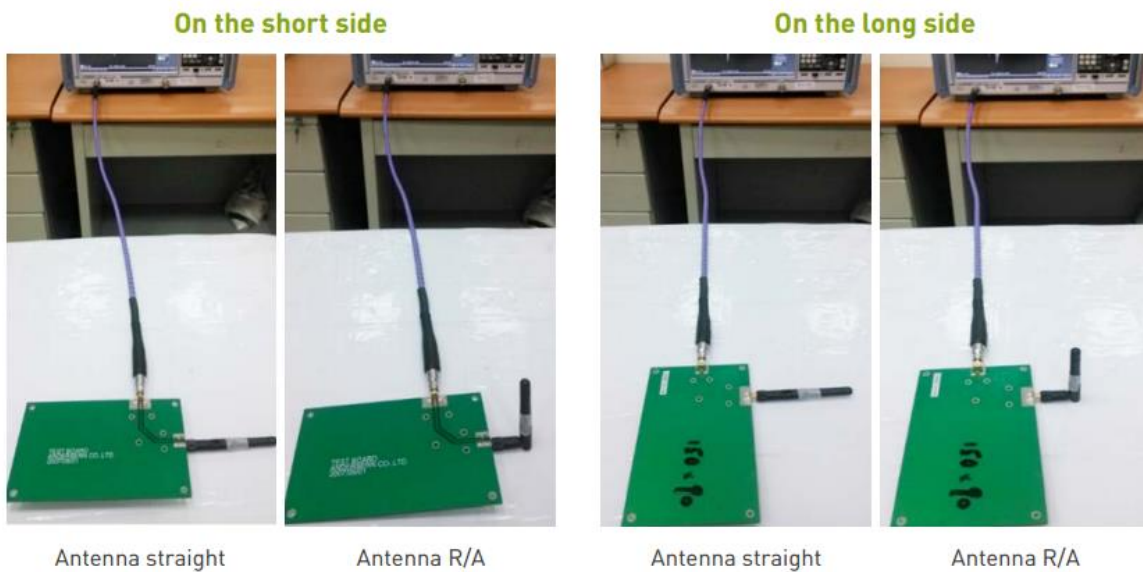


## 6.6 Return Loss when antenna setup on different conditions

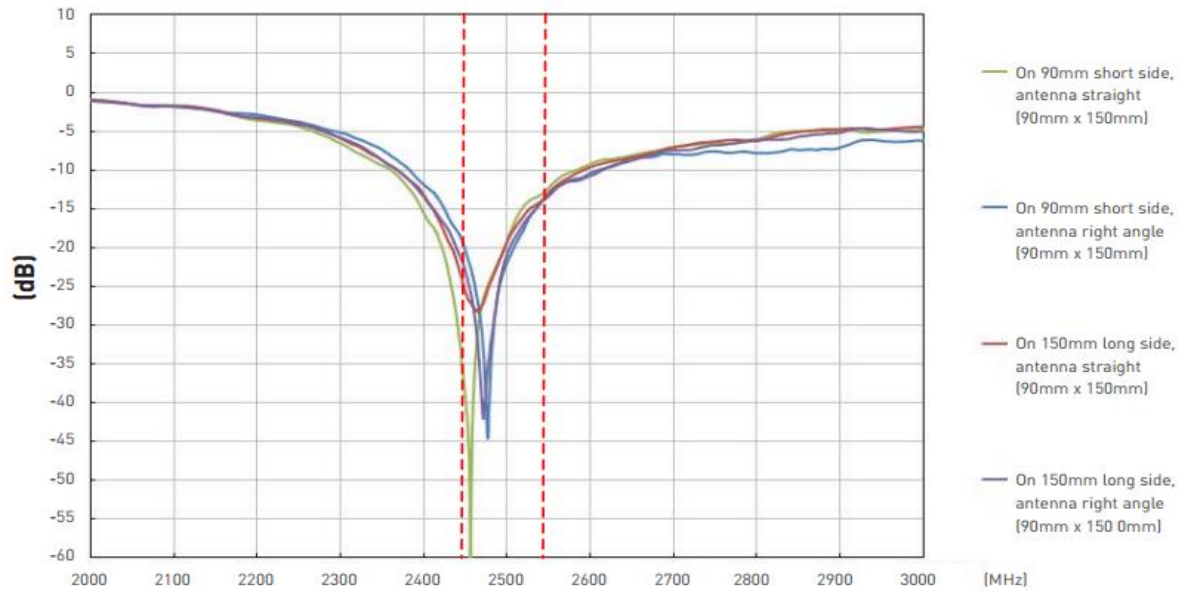


## 7. Packaging


10 pcs GW.11.A113 per PE Bag  
 Bag Dimensions - 100 x 200 mm  
 Weight - 70g

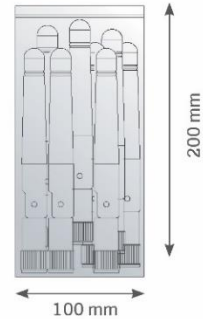


100 pcs GW.11.A113 per PE Large Bag  
 Bag Dimensions - 280 x 180mm  
 Weight - 0.73Kg



1000 pcs GW.11.A113 per carton  
 Carton - 360 x 310 x 160mm  
 Weight - 7.6Kg

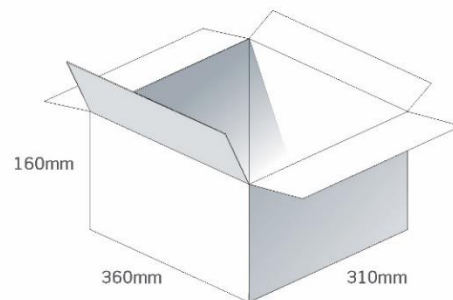

Pallet Dimensions 1200 x 1000x 1480mm  
 72 Cartons per Pallet  
 9 Cartons per layer  
 8 Layers

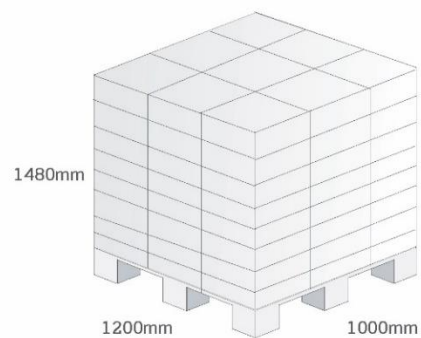

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

© Taoglas

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Taoglas:](#)

[GW.11.A113](#)