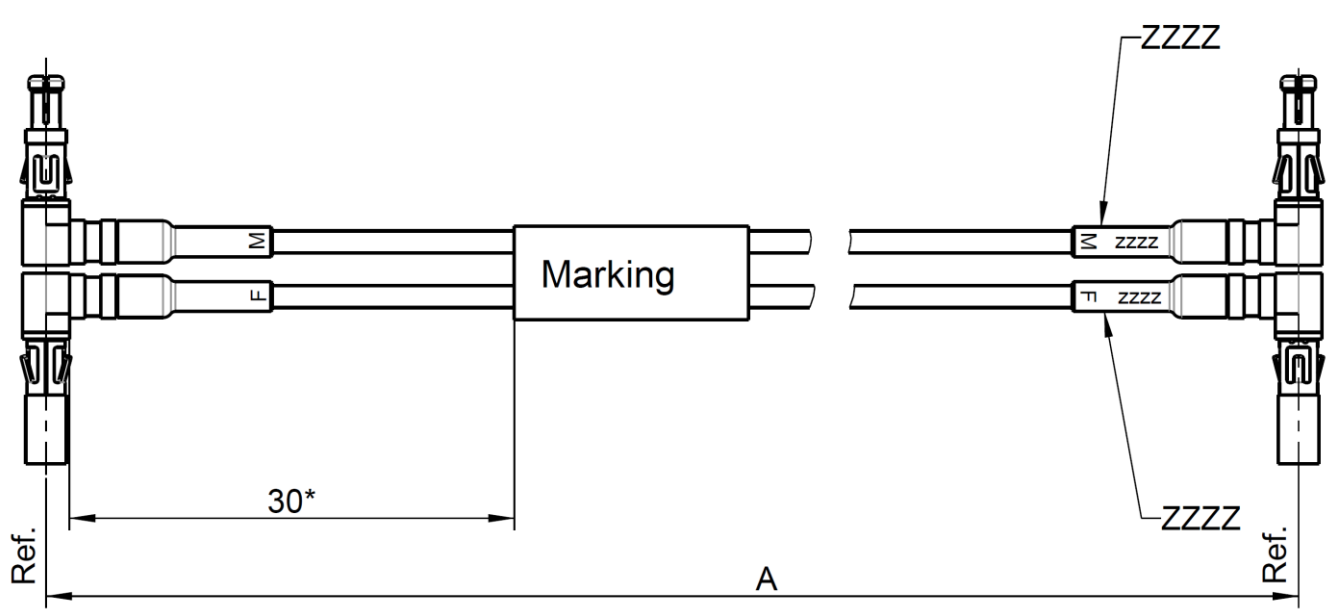


RFB00035/12.20/6.4 Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co. KG

Technical Data Sheet		Rosenberger	
Cable Set Mini Coax Plug / Jack – Mini-Coax Plug / Jack – RTK 047		L99-A0488-XXX-Y	
 All dimensions are in mm; tolerances: ± 3mm for A ≤ 300 mm; ± 1% for A > 300 mm *) movably			
Available variants			
Type	max. Insertion loss at 12 GHz	Marking	Weight (g) / pce
L99-A0488-XXX-Y	≤ 0.0041 dB/mm * A mm + 0.6 dB	ROSENBERGER YYYYY-WW L99-A0488-XXX-Y FAC-RRRRRRR	0.011 g/mm * A mm + 4.3 g
XXX – length in mm = A Y – pair matching (non, 2ps) WW – week YYYYY – year zzzz – individual serial no. FAC – Factory Code RRRRRRR – lot no. Note: max. Insertion Loss: First constant = Cable attenuation in dB / mm; Second Constant = Connector left and Connector right +needed Adaptor Weight: First constant = Cable- and Armour- weight per mm; Second Constant = Connector left and Connector right weight per pce			
Assembly parts			
Connector left	Mini Coax plug, right angle	23S104-270L5	
Connector right	Mini-Coax plug, right angle	23S104-270L5	
Connector left	Mini Coax jack, right angle	23K104-270L5	
Connector right	Mini-Coax jack, right angle	23K104-270L5	
Cable	RTK 047		
Assembly parts			
Assembly instruction	23 MV-A008		
öffentlich public			
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.com		Tel. : +49 8684 18-0 Email : info@rosenberger.com	Page 1 / 2

Technical Data Sheet

Rosenberger

Cable Set

Mini Coax Plug / Jack – Mini-Coax Plug / Jack – RTK 047

L99-A0488-XXX-Y

Electrical data

Impedance	50 Ω
Frequency	DC to 12 GHz
Return loss ¹	≥ 11 dB, DC to 12 GHz
Insertion loss ¹	see table available variants
Phasematched by pairs	depending on Part Number
	non – non matched
	2ps – max. 2 ps delay difference

Individual testing

The S-Parameters (S11, S22, S21, S12) will be tested and the cable pairs are measured fore phase matching.:

¹ Return Loss and Insertion Loss includes the measurement adaptor

Mechanical data

Minimum bend radius:	
Single	5.1. mm
Multiple	10.2 mm

Housing

2 Channel	23Z121-008
4 Channel	23Z121-007
6 Channel	23Z121-004
8 Channel	23Z121-005

Tooling

Extraction tool	23W100-000
-----------------	------------

Environmental data

Temperature range	-40°C to +115°C
RoHS	compliant

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

For the installation of the electrotechnical equipment, particular electrotechnical expertise is required.



Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
F. Reiner	30.09.19	F. Reiner	08.03.23	a00	23-s160	J. Rohloff	07.09.23

Rosenberger Hochfrequenztechnik GmbH & Co. KG
P.O.Box 1260 D-84526 Tittmoning Germany
www.rosenberger.com

Tel. : +49 8684 18-0
Email : info@rosenberger.com

Page
2 / 2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Rosenberger:

L99-A0488-300-non