
**Mounting Option** 


03-.116 (2.95) I.D. Floating Eyelets

#### **Contact Detail**


558-90 Degree Bend (Code 541 Contacts)

.156 [3.96] Contact Spacing x .200 [5.08] Row Spacing

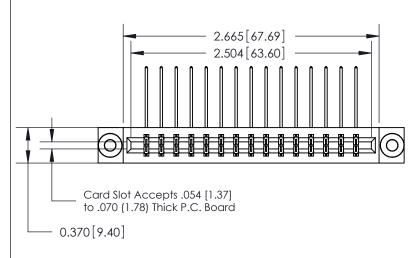

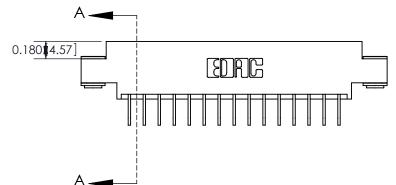



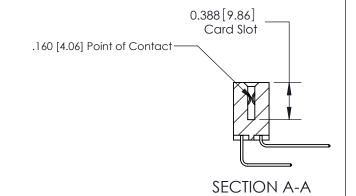

## **See Accompanying Page for:**

- **Bend Detail**
- **Mounting Options**
- **Features and Specifications**

333 Series Card Edge Connector Part Number: 333-030-558-803

YOUR CONNECTION TO QUALITY & SERVICE

|   | ACAD REFERENCE NO. 333 ENG MASTER |                  |  |  |
|---|-----------------------------------|------------------|--|--|
|   | DRAWN: J.LEE                      | DATE: OCT. 14/09 |  |  |
|   | CHECKED:                          | DATE:            |  |  |
|   | SCALE: NTS                        | SHEET 1 OF 4     |  |  |
| 0 | DRAWING NUMBER                    | ISSUE            |  |  |

333 Assembly

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.

ISSUE NUMBER

ORIGINAL

1



| 333 Series Card Edge Conn            | ACAD REFERENCE NO. 333 ENG MASTER                                 |                      |              |       |
|--------------------------------------|---|----------------------|--------------|-------|
| Contact Bend Detail                  | DRAWN: J.LEE  | DATE: OCT. 14/09     |              |       |
| Confact bend Defail                  |   | CHECKED:             | DATE:        |       |
| EDAC INC                             | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND | SCALE: NTS           | SHEET 2 OF 4 |       |
| TORONTO, ONTARIO SHALL NOT BE REPRO  | SHALL NOT BE REPRODUCED, OR COPIED  OR USED AS THE BASIS FOR THE  | DRAWING NUMBER       |              | ISSUE |
| YOUR CONNECTION TO QUALITY & SERVICE | MANUFACTURE OR SALE OF APPARATUS                                  | PARATUS 333 Accombly |              | 1     |

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER



SSUE NUMBER

DRIGINAL

1



|                                   | 333 Series Card Edge Connector  |         |                                  | ACAD REFERENCE NO. 333 ENG MASTER |             |        |   |
|-----------------------------------|---|---------|----------------------------------|-----------------------------------|-------------|--------|---|
|                                   |   | DRAWN:  | J.LEE                            | DATE: O                           | CT. 14/09   |        |   |
|                                   | Mounting Options  |         | CHECKED:                         |                                   | DATE:       |        |   |
|                                   | EDAC INC THESE DRAWINGS AND SPECIFICATIONS  |         | SCALE:                           | NTS                               | SHEET :     | 3 OF 4 |   |
|                                   | TORONTO, ONTARIO  ARE THE PROPERTY OF EDAC INCAND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE | DRAWING | NUMBER                           |                                   | ISSUE       |        |   |
| YOUR CONNECTION TO QUALITY & SERV |   | CANADA  | MANUFACTURE OR SALE OF APPARATUS | 3                                 | 33 Assembly |        | 1 |

ISSUE NUMBER

ORIGINAL



### **Features**

- .156 (3.96) Contact Spacing x .200 (5.08) Row Spacing
- Accepts .062 (1.57) Nominal Thickness P.C. Board
- High Profile Insulator Body .600 (15.24)
- Contact Termination Options include P.C. Tail, Wire Hole, Wire Wrap, 90 Degree, & Extender Board Bends
- Single or Dual Row Configurations
- Variety of Mounting Options, Flush or Offset Lugs
- Accepts Between Contact and In-Contact Polarizing Keys

## **Specifications**

- Insulator Material: Thermoplastic Polyester, UL 94V-0, Colour: Green
- Contact Material: Copper, Nickel, Tin Alloy CA-725
- Contact Plating: Gold on the Mating Area, Tin on the Contact Tails, Nickel Underplate
- Current Rating: 3 Amperes Continuous
- Contact Resistance: 10 Milliohms Maximum
- Dielectric Withstanding Voltage: 1800 V AC rms at Sea Level Between Adjacent Contacts
- Insulation Resistance: 5000 Megohms Minimum
- Operating Temperature: -65 to +105 Degrees C
- Insertion Force: 16 oz (4.45 N) Maximum per Contact Pair when Tested with a .070 (1.78) Thick Gauge
- Withdrawal Force: 1 oz (0.28 N) Minimum per Contact Pair when Tested with a .054 (1.37) Thick Gauge

| 333 Series Card Edge Connector     | ACAD REFERENCE NO. 333 ENG MASTER                |
|------------------------------------|--|
| Features and Specifications        | DRAWN: J.LEE DATE: OCT. 14/09                    |
| realities and specifications       | CHECKED: DATE:                                   |
|                                    | WINGS AND SPECIFICATIONS SCALE: NTS SHEET 4 OF 4 |
| I SI I I ORONTO, ONTARIO SHALL NOT | BE REPRODUCED, OR COPIED DRAWING NUMBER ISSUE    |
|                                    | JRE OR SALE OF APPARATUS 333 Assombly 1          |

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

EDAC:

333-030-558-803