


N-Channel JFET

25 V, 20 to 40 mA, 40 mS, CPH3

CPH3910



CPH3
CASE 318BA

Features

- V_{GDS} : -25 V max.
- $|y_{fs}|$: 40 mS typ.
- C_{iss} : 6.0 pF typ.
- N_F : 2.1 dB typ.
- This is a Pb-Free Device

Applications


- For AM Tuner RF Amplification
- Low Noise Amplifier

ABSOLUTE MAXIMUM RATINGS (at $T_A = 25^\circ\text{C}$)


Symbol	Parameter	Ratings	Unit
V_{DSX}	Drain-to-Source Voltage	25	V
V_{GDS}	Gate-to-Drain Voltage	-25	V
I_G	Gate Current	10	mA
I_D	Drain Current	50	mA
P_D	Allowable Power Dissipation	400	mW
T_j	Junction Temperature	150	$^\circ\text{C}$
T_{stg}	Storage Temperature	-55 to +150	$^\circ\text{C}$

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

ELECTRICAL CONNECTION



MARKING DIAGRAM



ORDERING INFORMATION

Device	Package	Shipping [†]
CPH3910-TL-E	CPH3 (Pb-Free)	3 000 / Tape & Reel







[†]For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, [BRD8011/D](#).

ELECTRICAL CHARACTERISTICS (at $T_A = 25^\circ\text{C}$)





Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
$V_{(BR)GDS}$	Gate-to-Drain Breakdown Voltage	$I_G = -10 \mu\text{A}$, $V_{DS} = 0 \text{ V}$	-25			V
I_{GSS}	Gate Cutoff Current	$V_{GS} = -10 \text{ V}$, $V_{DS} = 0 \text{ V}$			-1.0	nA
$V_{GS(off)}$	Cutoff Voltage	$V_{DS} = 5 \text{ V}$, $I_D = 100 \mu\text{A}$	-0.6	-1.2	-1.8	V
I_{DSS}	Drain Current	$V_{DS} = 5 \text{ V}$, $V_{GS} = 0 \text{ V}$	20		40	mA
$ y_{fs} $	Forward Transfer Admittance	$V_{DS} = 5 \text{ V}$, $V_{GS} = 0 \text{ V}$, $f = 1 \text{ kHz}$	30	40		mS
C_{iss}	Input Capacitance	$V_{DS} = 5 \text{ V}$, $V_{GS} = 0 \text{ V}$, $f = 1 \text{ MHz}$		6.0		pF
C_{rss}	Reverse Transfer Capacitance	$V_{DS} = 5 \text{ V}$, $V_{GS} = 0 \text{ V}$, $f = 1 \text{ MHz}$		2.3		pF
N_F	Noise Figure	$V_{DS} = 5 \text{ V}$, $V_{GS} = 0 \text{ V}$, $f = 100 \text{ MHz}$		2.1	2.8	dB

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

TYPICAL PERFORMANCE CHARACTERISTICS

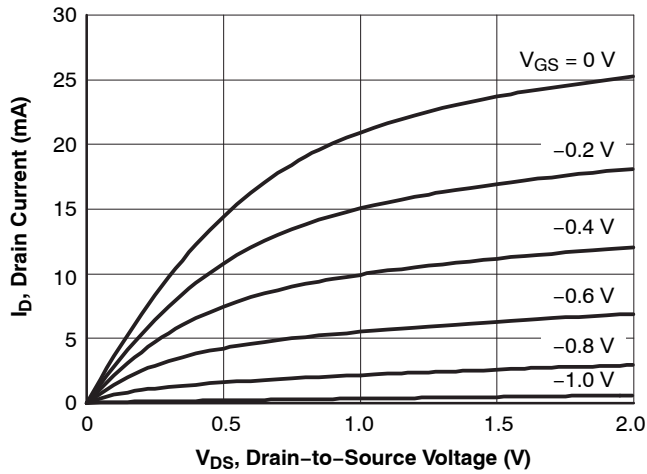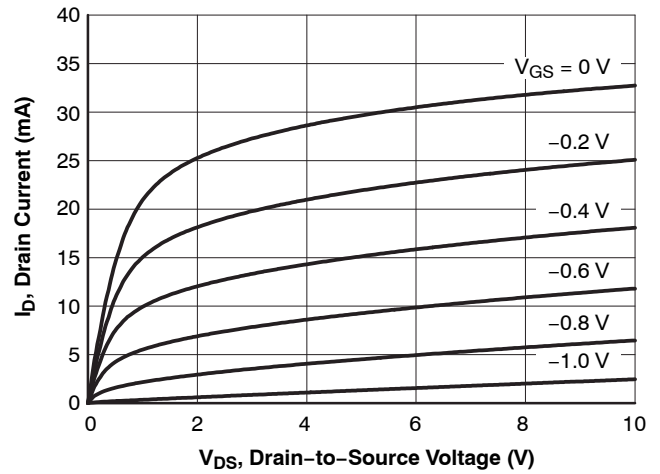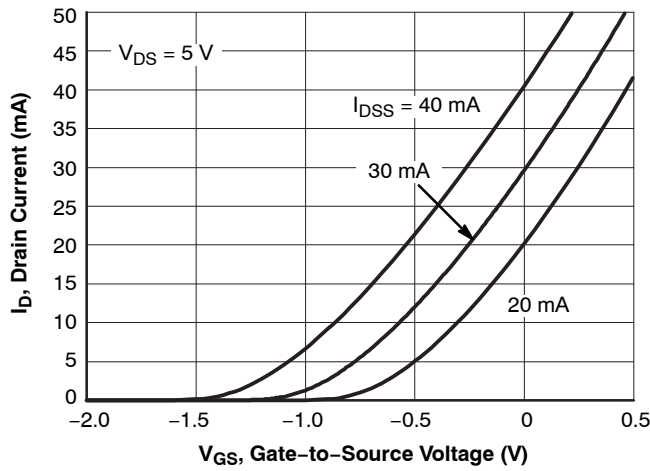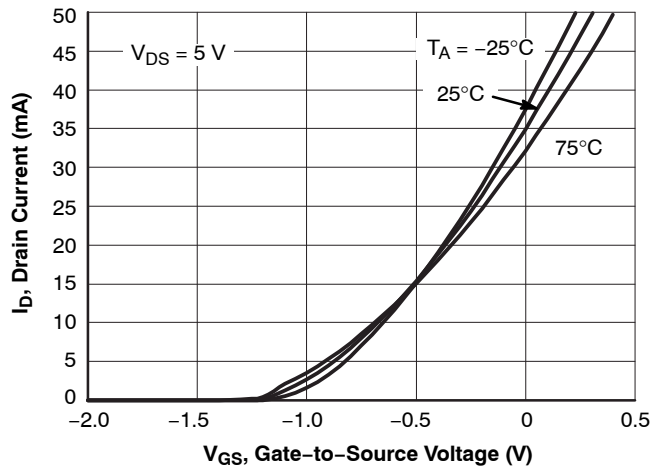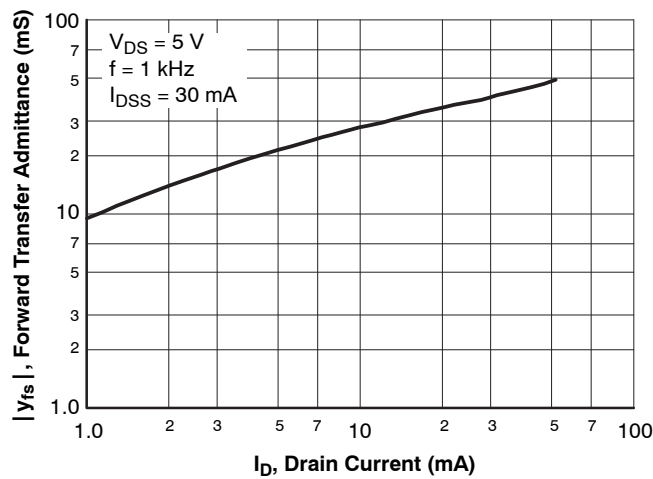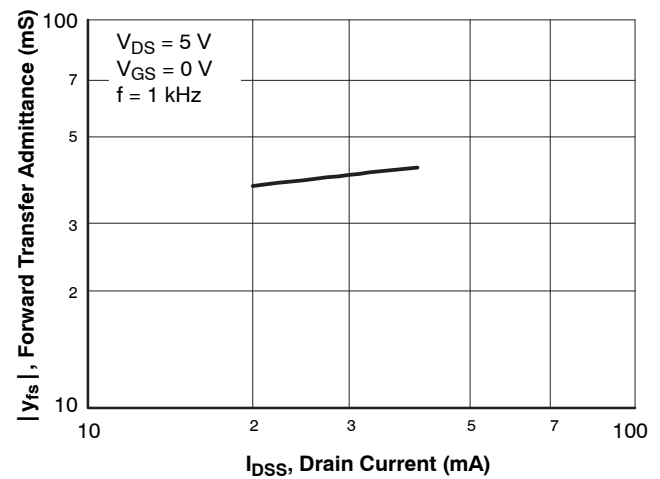
Figure 1. $I_D - V_{DS}$ Figure 2. $I_D - V_{DS}$ Figure 3. $I_D - V_{GS}$ Figure 4. $I_D - V_{GS}$ Figure 5. $|y_{fs}| - I_D$ Figure 6. $|y_{fs}| - I_{DSS}$

TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

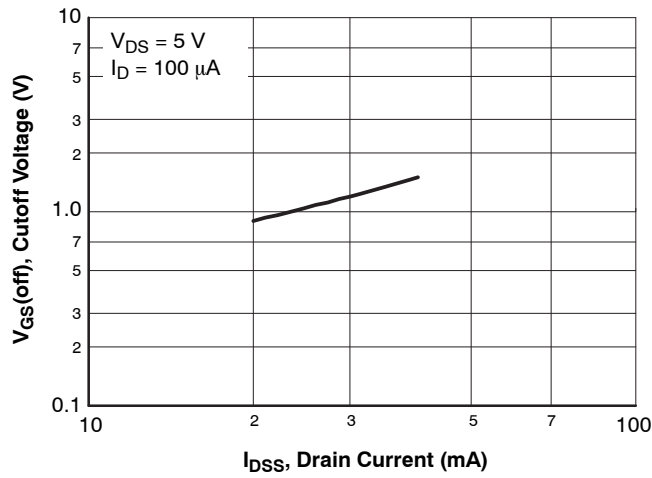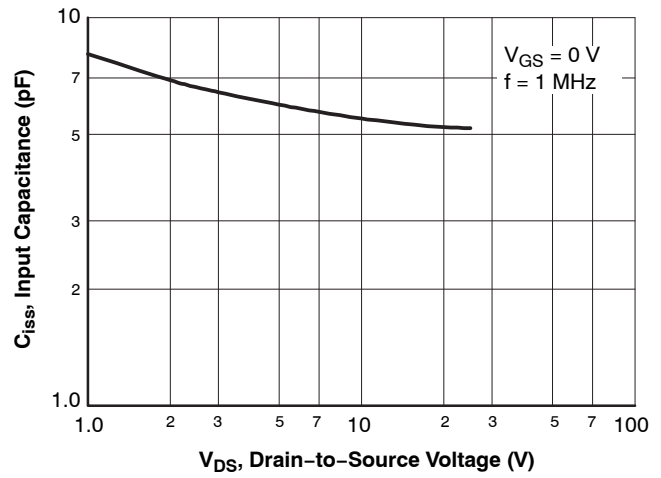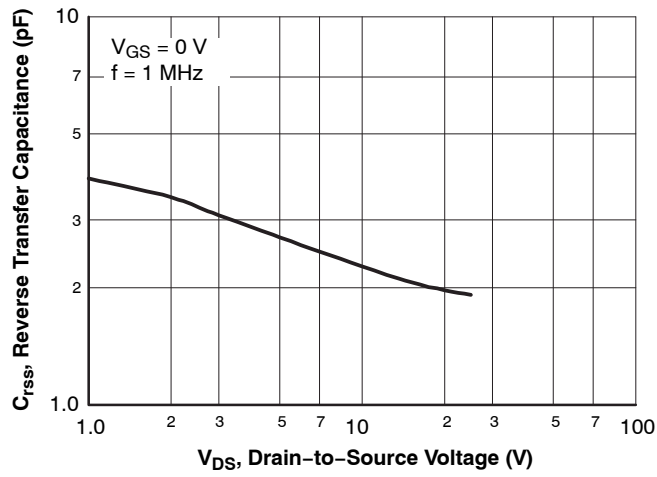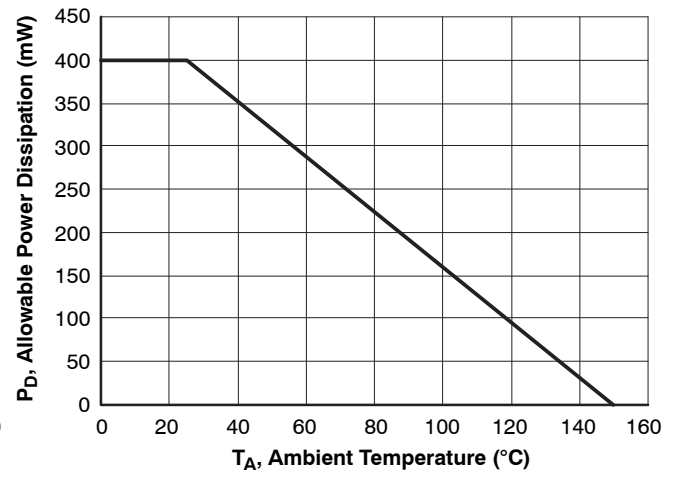Figure 7. $V_{GS(off)} - I_{DSS}$ Figure 8. $C_{iss} - V_{DS}$ Figure 9. $C_{rss} - V_{DS}$ Figure 10. $P_D - T_A$

CPH3
CASE 318BA
ISSUE O

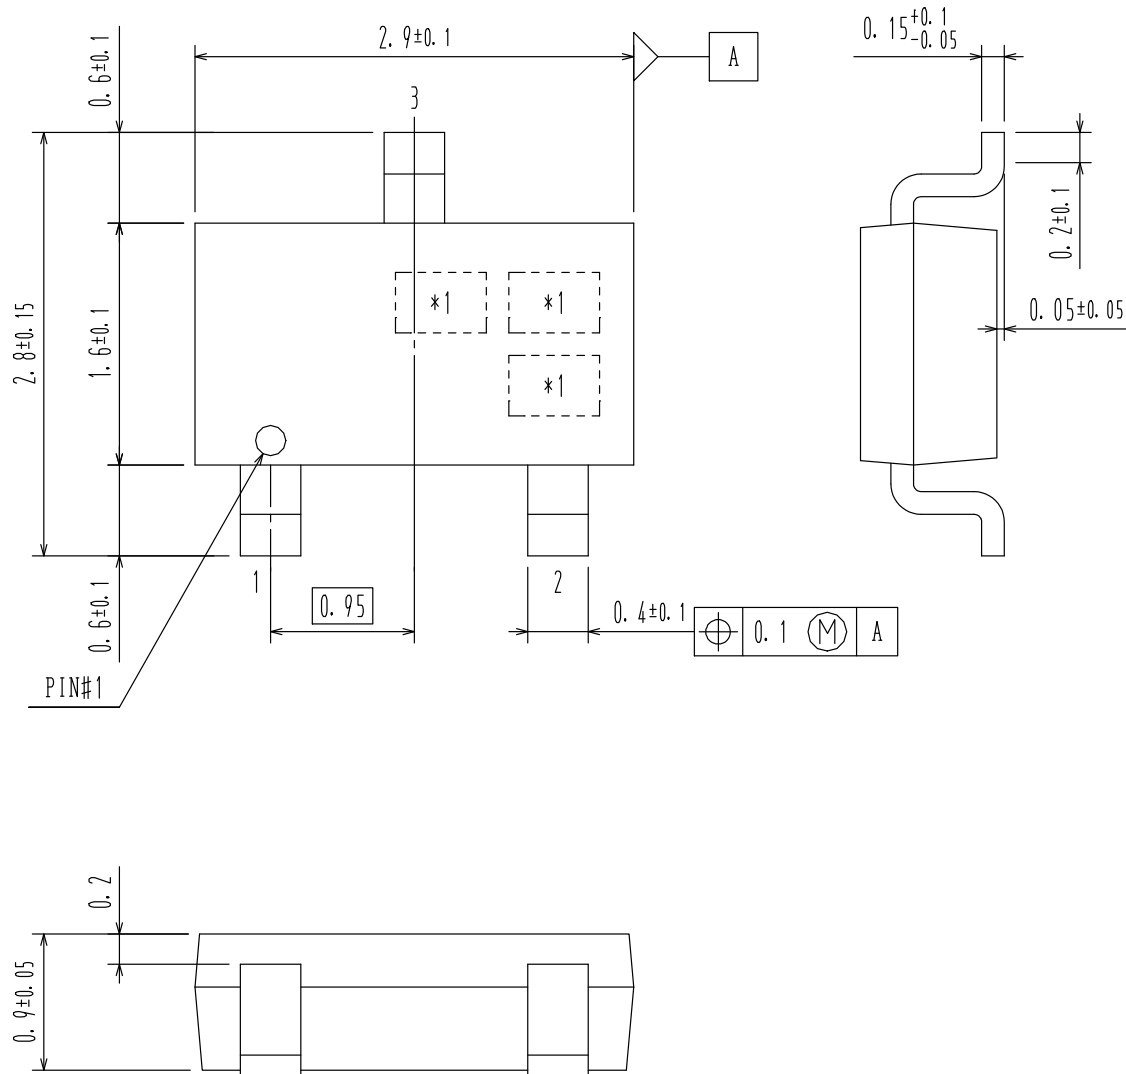DATE 30 NOV 2011



DOCUMENT NUMBER:	98AON65437E	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.
DESCRIPTION:	CPH3	PAGE 1 OF 1

onsemi and **onsemi** are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

onsemi, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

Technical Library: www.onsemi.com/design/resources/technical-documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at
www.onsemi.com/support/sales

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[onsemi:](#)

[CPH3910-TL-E](#)