


PCB LAYOUT

SWITCH FUNCTION	
POS. 1	POS. 2
ON	ON
1-3, 4-6	2-3, 4-5

NOTES:

1. ALL DIMENSIONS IN mm [INCHES]
2. GENERAL TOLERANCE: x.x= ±0.4
x.xx=±.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.1A; 30V
5. CONTACT RESISTANCE: 100 mILLI-OHMS MAX.
- ▲ 6. TIMING: NON-SHORTING
- ▲ 7. TRAVEL: FULL 2.5mm, LOCK 1.5mm
- ▲ 8. OPERATING FORCE: 160±80gf
9. ELECTRICAL LIFE: 10,000 CYCLES MAKE AND BREAK
CYCLES AT FULL LOAD
10. ▲ DENOTE CRITICAL PARAMETER
11. 2002/95/EC (ROHS) COMPLIANT

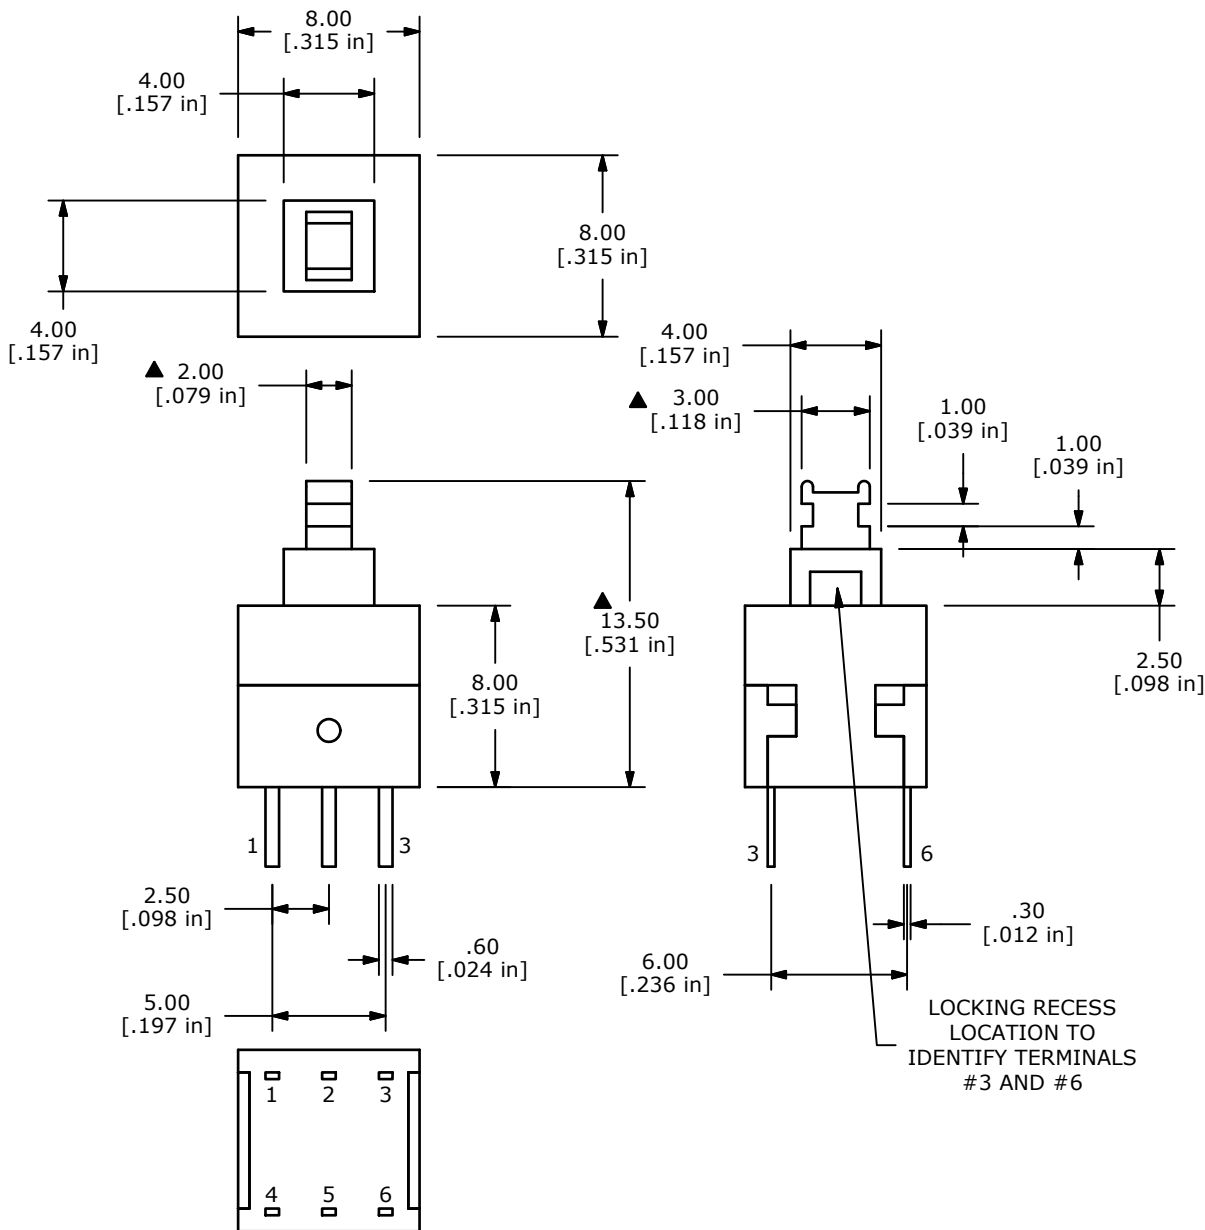

LOCKING RECESS
LOCATION TO
IDENTIFY TERMINALS
#3 AND #6



B	21054	Act Force was 300 +/- 100	2/28/13	rc
A	20978	New Release	1/21/13	rc
REV	PCR NO	DESCRIPTION	DATE	BY

TITLE TL2285EE				
SCALE 4:1	DATE 1/21/2013	DR rc	DWG Q228501	REV B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[E-Switch:](#)

[TL2285EE](#)