



insulation monitoring relay for non-grounded (IT) networks up to 250 V AC, 15-400 Hz and up to 300 V DC measuring range 1-100 kOhm supply voltage 24-240 V AC/DC 22.5 mm, 1 changeover contact spring-loaded terminal (push-in)

product brand name	SIRIUS
product designation	Insulation monitoring relay with analog setting
product type designation	3UG4
<b>General technical data</b>	
product function	Insulation monitor
type of voltage	
• for monitoring	AC/DC
• of the operating voltage for actuation	AC/DC
• of the control supply voltage	AC/DC
surge voltage resistance rated value	6 000 V
protection class IP	IP20
thermal current of the switching element with contacts maximum	4 A
reference code according to IEC 81346-2	K
Substance Prohibittance (Date)	05/01/2012
<b>Product Function</b>	
product function	
• error memory	Yes
• adjustable open/closed-circuit current principle	No
• manual RESET	Yes
<b>Control circuit/ Control</b>	
control supply voltage at AC	
• at 50 Hz rated value	24 ... 240 V
• at 60 Hz rated value	24 ... 240 V
control supply voltage at DC rated value	24 ... 240 V
operating range factor control supply voltage rated value at DC	
• initial value	0.85
• full-scale value	1.1
operating range factor control supply voltage rated value at AC at 50 Hz	
• initial value	0.85
• full-scale value	1.1
operating range factor control supply voltage rated value at AC at 60 Hz	
• initial value	0.85
• full-scale value	1.1
<b>Measuring circuit</b>	
measurable line frequency	15 ... 400 Hz
measurable voltage at AC	0 ... 250 V
<b>Auxiliary circuit</b>	

number of NC contacts for auxiliary contacts	0	
number of NC contacts delayed switching	0	
number of NO contacts for auxiliary contacts	0	
number of NO contacts delayed switching	0	
number of CO contacts		
• delayed switching	1	
Main circuit		
operating frequency rated value	15 ... 400 Hz	
Connections/ Terminals		
product component removable terminal for auxiliary and control circuit	No	
type of electrical connection	spring-loaded terminals	
type of connectable conductor cross-sections		
• solid	2x (0.5 ... 1.5 mm²)	
• finely stranded with core end processing	2x (0.5 ... 1.5 mm²)	
• finely stranded without core end processing	2x (0.5 ... 1.5 mm²)	
• for AWG cables solid	2x (20 ... 16)	
• for AWG cables stranded	2x (18 ... 16)	
connectable conductor cross-section		
• solid	0.5 ... 1.5 mm²	
• finely stranded with core end processing	0.5 ... 1.5 mm²	
• finely stranded without core end processing	0.5 ... 1.5 mm²	
AWG number as coded connectable conductor cross section		
• solid	20 ... 16	
• stranded	18 ... 16	
Installation/ mounting/ dimensions		
mounting position	any	
fastening method	snap-on fastening on 35 mm DIN rail	
height	78 mm	
width	22.5 mm	
depth	100 mm	
required spacing		
• with side-by-side mounting		
— forwards	0 mm	
— backwards	0 mm	
— upwards	0 mm	
— downwards	0 mm	
— at the side	0 mm	
• for grounded parts		
— forwards	0 mm	
— backwards	0 mm	
— upwards	0 mm	
— at the side	0 mm	
— downwards	0 mm	
• for live parts		
— forwards	0 mm	
— backwards	0 mm	
— upwards	0 mm	
— downwards	0 mm	
— at the side	0 mm	
Ambient conditions		
ambient temperature during operation	-25 ... +60 °C	
Certificates/ approvals		
General Product Approval	EMC	Declaration of Con- formity

[Confirmation](#)



Declaration of Conformity	Marine / Shipping	other
---------------------------	-------------------	-------



[Confirmation](#)

#### Further information

Siemens has decided to exit the Russian market (see here).

<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3UG4582-2AW31>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3UG4582-2AW31>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3UG4582-2AW31>


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3UG4582-2AW31&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3UG4582-2AW31&lang=en)


Characteristic: Derating

<https://support.industry.siemens.com/cs/ww/en/ps/3UG4582-2AW31/manual>

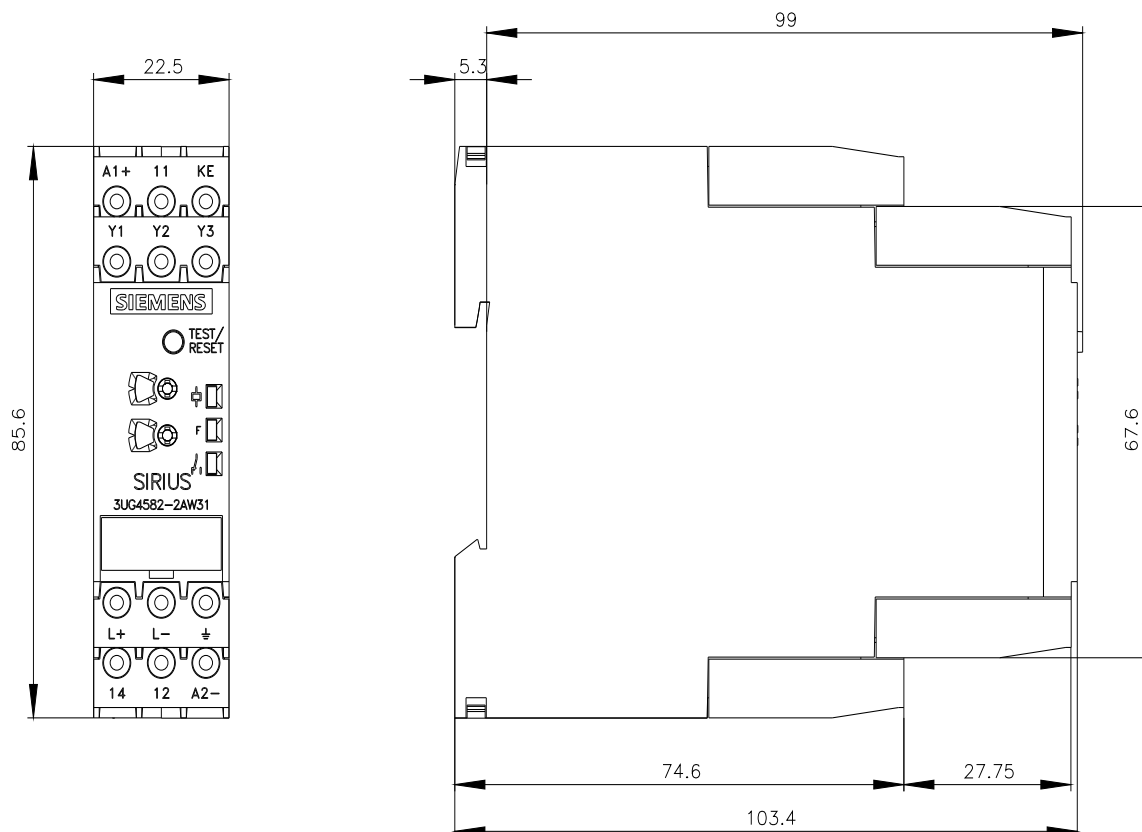

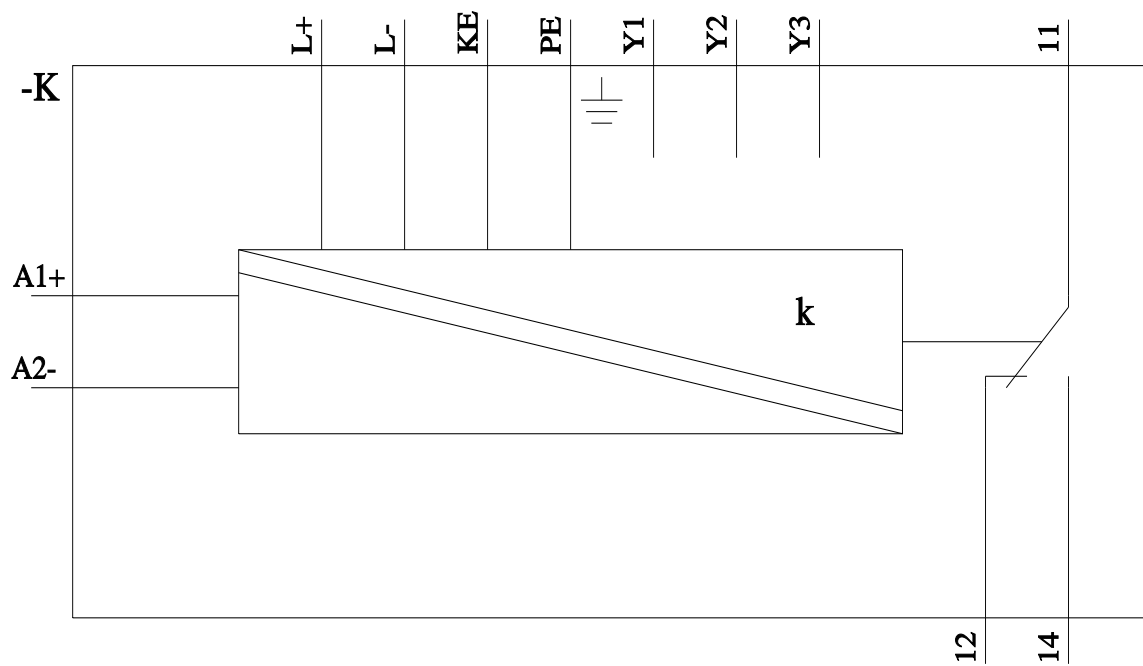

last modified:

11/24/2022 

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3UG45822AW31