

# High-Efficiency, 36V 100mA Synchronous Step-Down Converter

## 1 General Description

The RT6208 is a highly efficient, monolithic synchronous step-down DC/DC converter designed to deliver exceptional performance across a wide range of applications. Capable of providing up to 100mA of output current from an input supply spanning 4.75V to 36V, the RT6208 offers a versatile and dependable solution for diverse power management needs. Notably, its standout feature is its remarkable efficiency, drawing only 25 $\mu$ A of typical supply current at no load while maintaining precise output voltage regulation. This ensures optimal efficiency across varying load conditions, rendering the RT6208 suitable for a broad spectrum of power supply requirements.

Operating in Boundary Conduction Mode (BCM), the RT6208 boasts low quiescent current and an adjustable high-side peak current limit, further enhancing its efficiency and performance. This allows the RT6208 to maintain high efficiency over a wide range of load currents, providing consistent and reliable power delivery. Additionally, the inclusion of soft-start protection is a valuable feature, effectively eliminating input current surge during start-up, ensuring smooth and stable operation from the moment power is applied.

Furthermore, the RT6208 offers a low current (3 $\mu$ A) shutdown mode, providing output disconnect functionality. This feature is particularly beneficial for battery-powered systems, enabling easy power management and contributing to extended battery life. The RT6208 is available in SOT-23-6 and SOT-23-8 packages. The recommended junction temperature range is  $-40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$ , and the ambient temperature range is  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$ .

## 2 Features

- Achieves Very High Efficiency in Low Load Conditions
- $\pm 1\%$  High Accuracy Feedback Voltage
- 4.75V to 36V Input Voltage Range
- 0.4V to 5V Output Voltage Range
- 100mA Output Current
- Integrated High-Side and Low-Side Switches
- No Compensation Required
- Low Quiescent Current: 25 $\mu$ A (Typical)
- Adjustable Peak Current Limit
- Cycle-by-Cycle Overcurrent Protection
- Input Undervoltage-Lockout
- Internal Soft-Start Function
- Over-Temperature Protection

## 3 Applications

- Cordless Power Tools, Wireless Chargers
- Industrial and Commercial Low Power Systems
- Green Electronics/Appliances
- Point of Load Regulation for High-Performance DSPs
- MCU Supply in Wireless LED Lighting

## 4 Ordering Information

RT6208□□

Package Type<sup>(1)</sup>

E: SOT-23-6

V8: SOT-23-8

Lead Plating System


G: Richtek Green Policy Compliant<sup>(2)</sup>

### Note 1.

- Marked with <sup>(1)</sup> indicated: Compatible with the current requirements of IPC/JEDEC J-STD-020.
- Marked with <sup>(2)</sup> indicated: Richtek products are Richtek Green Policy compliant.




## 5 Simplified Application Circuit

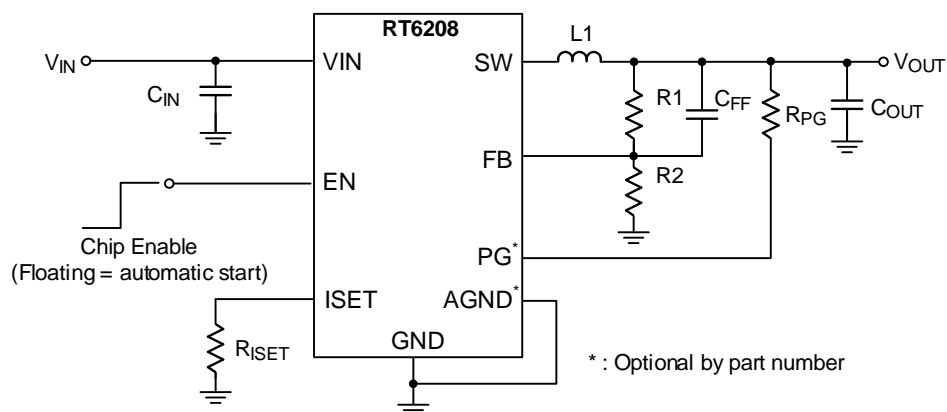


## 6 Marking Information

RT6208GE



30= : Product Code  
DNN : Date Code

RT6208GV8



0E= : Product Code  
DNN : Date Code




# Table of Contents

<b>1</b>	<b>General Description</b>	<b>1</b>	<b>16</b>	<b>Application Information</b>	<b>16</b>
<b>2</b>	<b>Features</b>	<b>1</b>	16.1	Inductor Selection	16
<b>3</b>	<b>Applications</b>	<b>1</b>	16.2	Input Capacitor Selection	16
<b>4</b>	<b>Ordering Information</b>	<b>1</b>	16.3	Output Capacitor Selection	17
<b>5</b>	<b>Simplified Application Circuit</b>	<b>2</b>	16.4	Peak Current Resistor Selection	18
<b>6</b>	<b>Marking Information</b>	<b>2</b>	16.5	Output Voltage Setting and Feedback Network	18
<b>7</b>	<b>Pin Configuration</b>	<b>4</b>	16.6	Thermal Considerations	18
<b>8</b>	<b>Functional Pin Description</b>	<b>4</b>	16.7	Layout Considerations	20
<b>9</b>	<b>Functional Block Diagram</b>	<b>5</b>	<b>17</b>	<b>Outline Dimension</b>	<b>22</b>
<b>10</b>	<b>Absolute Maximum Ratings</b>	<b>6</b>	<b>18</b>	<b>Footprint Information</b>	<b>24</b>
<b>11</b>	<b>Recommended Operating Conditions</b>	<b>6</b>	<b>19</b>	<b>Packing Information</b>	<b>25</b>
<b>12</b>	<b>Electrical Characteristics</b>	<b>7</b>	19.1	SOT-23-6 Tape and Reel Data	25
<b>13</b>	<b>Typical Application Circuit</b>	<b>8</b>	19.2	SOT-23-6 Tape and Reel Packing	26
<b>14</b>	<b>Typical Operating Characteristics</b>	<b>9</b>	19.3	SOT-23-6 Packing Material Anti-ESD Property	27
<b>15</b>	<b>Operation</b>	<b>13</b>	19.4	SOT-23-8 Tape and Reel Data	28
15.1	Hysteresis Mode Control	13	19.5	SOT-23-8 Tape and Reel Packing	29
15.2	Enable Control	13	19.6	SOT-23-8 Packing Material Anti-ESD Property	30
15.3	Input Undervoltage Lockout	14	<b>20</b>	<b>Datasheet Revision History</b>	<b>31</b>
15.4	Soft-Start	14			
15.5	Power Good Indicator	15			
15.6	High-Side Switch Peak Current-Limit Protection	15			
15.7	Over-Temperature Protection	15			




## 7 Pin Configuration

(TOP VIEW)



SOT-23-6




SOT-23-8

## 8 Functional Pin Description

Pin No		Pin Name	Pin Function
SOT-23-6	SOT-23-8		
1	7	FB	Feedback sense input. The pin is used to set the output voltage of the converter via a resistor divider. It is recommended to place the FB resistor divider as close to the FB pin and AGND as possible.
2	2	GND	Power Ground. Connect this pin to PCB ground planes with multiple vias.
3	8	EN	Enable control input. A voltage on this pin above 1.25V enables the converter into normal mode; forcing this pin below 0.3V shuts down the IC, reducing quiescent current to 3μA. An internal 2μA current pulls up the enable pin for automatic startup.
4	1	ISET	High-side peak current set pin. A resistor from this pin to GND sets the high-side peak current limit. Leave floating for the maximum peak current of 225mA (typical). Short this pin to GND for the minimum peak current of 50mA. A 1μA current is sourced out of this pin.
5	3	VIN	Input supply voltage. The input voltage range is from 4.75V to 36V. Connect an input capacitor of 2.2μF or larger ceramic capacitor (effective capacitance ≥ 0.58μF at T <sub>A</sub> = -40°C to 85°C and 36V <sub>DC</sub> bias condition) between this pin and GND.
6	4	SW	Switch node. Connect an inductor between SW and the output capacitor.
--	6	PG	Open-drain power-good indication pin for power rails status. To enable normal operation, pull up this pin using a 100kΩ resistor to the I/O reference power source. The PG output will go to logic-high once the last rail has completed its power-up procedure, and it will assert logic-low if the output voltage is low due to OTP, UVP, UVLO, and EN shutdown or during soft-start.
--	5	AGND	Analog ground. Use direct vias to connect to the second ground plane. Do not connect it to the exposed pad or the ground on the top layer.



**9 Functional Block Diagram**

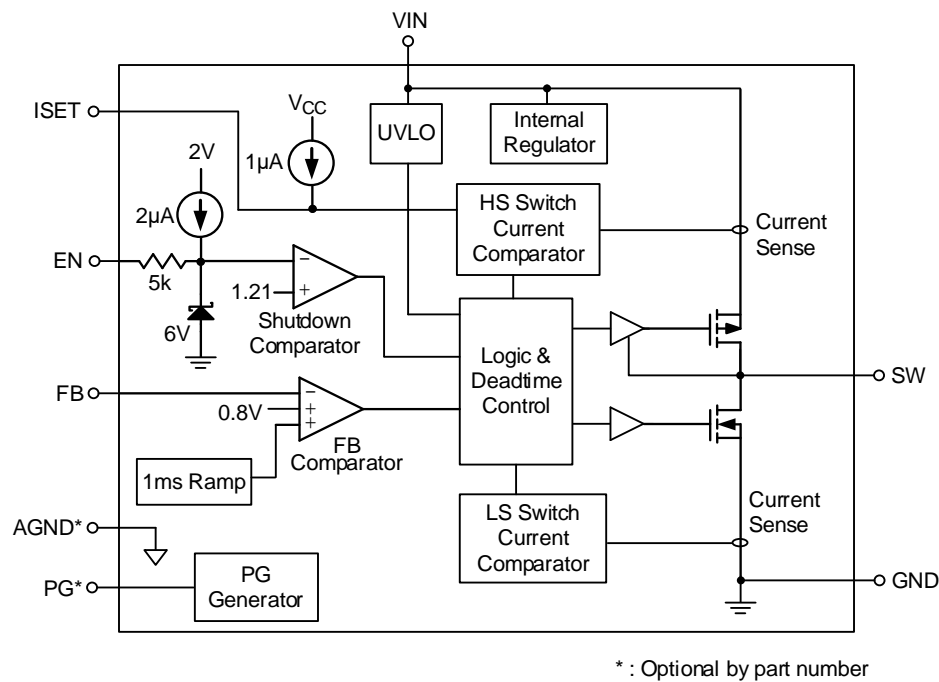



## 10 Absolute Maximum Ratings

(Note 2)

- Supply Voltage,  $V_{IN}$ ----- -0.3V to 40V
- Switch Voltage,  $SW$ ----- -0.3V to 40.3V
- <10ns----- -5V to 46.3V
- All Other Pins----- -0.3V to 6V
- Power Dissipation,  $P_D$  @  $T_A = 25^\circ\text{C}$
- SOT-23-6----- 0.48W
- SOT-23-8----- 0.53W
- Package Thermal Resistance (Note 3)
- SOT-23-6,  $\theta_{JA}$ ----- 208.2°C/W
- SOT-23-6,  $\theta_{JC}$ ----- 32°C/W
- SOT-23-8,  $\theta_{JA}$ ----- 186.2°C/W
- SOT-23-8,  $\theta_{JC}$ ----- 47.4°C/W
- Lead Temperature (Soldering, 10 sec.)----- 260°C
- Junction Temperature----- 150°C
- Storage Temperature Range----- -65°C to 150°C
- ESD Susceptibility (Note 4)
- HBM (Human Body Model)----- 2kV

**Note 2.** Stresses beyond those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions may affect device reliability.

**Note 3.**  $\theta_{JA}$  is measured under natural convection (still air) at  $T_A = 25^\circ\text{C}$  with the component mounted on a high effective-thermal-conductivity four-layer test board on a JEDEC 51-7 thermal measurement standard.  $\theta_{JC}$  is measured at the bottom of the package.

**Note 4.** Devices are ESD sensitive. Handling precautions are recommended.

## 11 Recommended Operating Conditions

(Note 5)

- Supply Input Voltage Range----- 4.75V to 36V
- Output Voltage Range----- 0.8V to 5V
- Ambient Temperature Range----- -40°C to 85°C
- Junction Temperature Range----- -40°C to 125°C

**Note 5.** The device is not guaranteed to function outside its operating conditions.



## 12 Electrical Characteristics

( $V_{IN} = 12V$ ,  $T_A = 25^{\circ}C$ , unless otherwise specified.)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
VIN Supply Input Voltage	$V_{IN}$		4.75		36	V
Undervoltage-Lockout Rising Threshold	$V_{UVLO\_R}$	$V_{IN}$ Rising	3.9	4.2	4.75	V
Undervoltage-Lockout Hysteresis	$V_{UVLO\_HYS}$		--	300	--	mV
EN Input Voltage Rising Threshold	$V_{EN\_R}$	Enable Rising	1	1.2	1.4	V
EN Threshold Hysteresis	$V_{EN\_HYS}$		--	100	--	mV
Soft-Start Period	tss	From 0% to 90% of $V_{OUT}$	--	1	--	ms
Quiescent Current	$I_{Q\_SW}$	$V_{EN} = 2V$ , switching current	--	160	190	$\mu A$
	$I_{Q\_NSW}$	$V_{EN} = 2V$ , non-switching	--	25	40	
Shutdown Current	$I_{SHDN}$	$V_{EN} = 0V$	--	3	6	$\mu A$
Feedback Threshold Voltage	$V_{FB}$	$V_{FB}$ Rising	0.792	0.8	0.808	V
Feedback Comparator Hysteresis	$V_{FB\_HYS}$		3	5	7	mV
FB Pin Current	$I_{FB}$		--	100	--	nA
On-Resistance of High-Side MOSFET	$R_{DS(on)_H}$		--	3	--	$\Omega$
On-Resistance of Low-Side MOSFET	$R_{DS(on)_L}$		--	1.5	--	$\Omega$
High-Side Switch (Peak) Current Limit	$I_{LIM\_H1}$	ISET pin floating	200	225	250	mA
	$I_{LIM\_H2}$	500k $\Omega$ from ISET pin to GND	--	135	--	
	$I_{LIM\_H3}$	ISET pin short to GND	--	50	--	
Power-Good Voltage Threshold	$V_{PG}$	$V_{FB}$ Rising	--	87.5	--	%
Power-Good Voltage Hysteresis	$V_{PG\_HYS}$	$V_{FB}$ Falling	--	5	--	%
Over-Temperature Protection Threshold	$T_{OTP}$		--	150	--	$^{\circ}C$
Over-Temperature Protection Hysteresis	$T_{OTP\_HYS}$		--	30	--	$^{\circ}C$

**Note 6.** Quiescent, or ground current, is the difference between input and output currents. It is defined by  $I_Q = I_{IN} - I_{OUT}$  under no-load conditions ( $I_{OUT} = 0mA$ ). The total current drawn from the supply is the sum of the load current plus the ground pin current.

**Note 7.** Guaranteed by design.



## 13 Typical Application Circuit

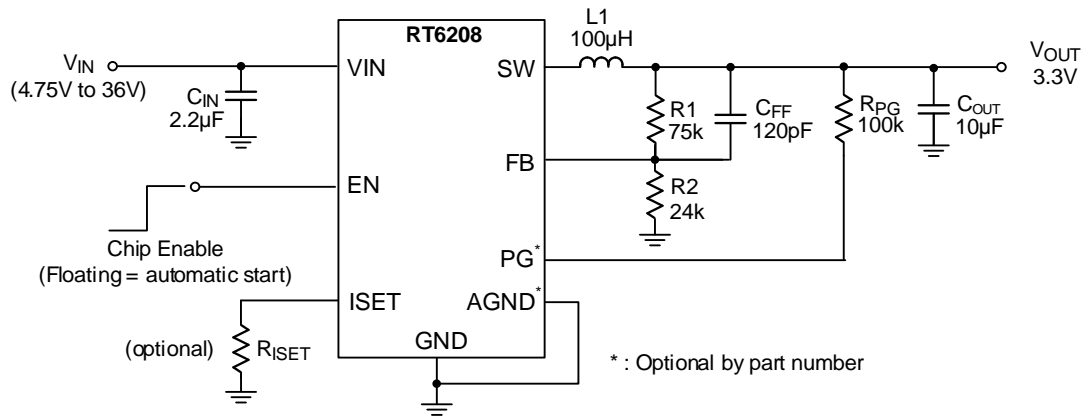


Table 1. Recommended Configuration of Common Output Voltage







V <sub>OUT</sub> (V)	C <sub>IN</sub> (μF)	C <sub>OUT</sub> (μF)	L (μH)	R <sub>2</sub> (kΩ)	R <sub>1</sub> (kΩ)	C <sub>FF</sub> (pF)	ISET
1.8	2.2	10	150	24	30	68	Floating
3.3	2.2	10	150	24	75	120	Floating
5	2.2	10	150	24	126	150	Floating

Table 2. Recommended Component Part Number







Component	Description	Vendor P/N
L	100μH, 5.8x5.8mm, 1.8mm, DCR = 0.815Ω	744052101(Wurth)
	100μH, 7.3x7.3mm, 4.5mm, DCR = 0.29Ω	744777920(Wurth)
C <sub>IN</sub>	4.7μF/1206/50V/X5R	GRM319R61H475KA12(Murata)
C <sub>OUT</sub>	22μF/1206/25V/X5R	C3225X5R1E226MT(TDK)









14 Typical Operating Characteristics

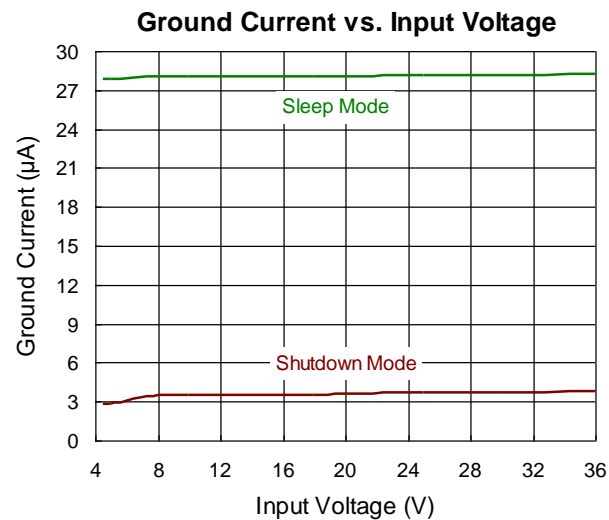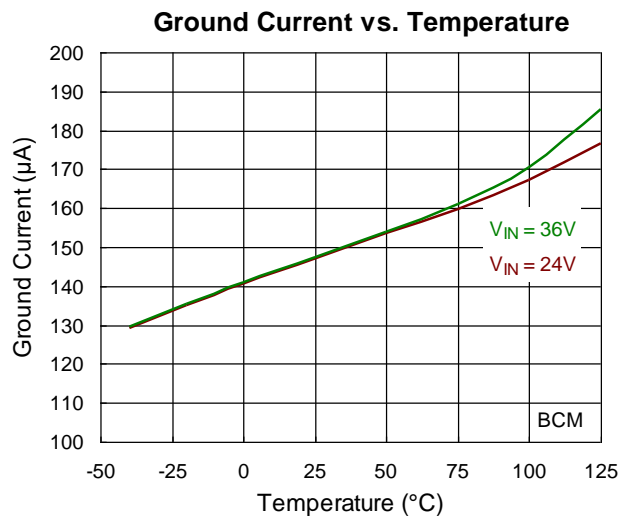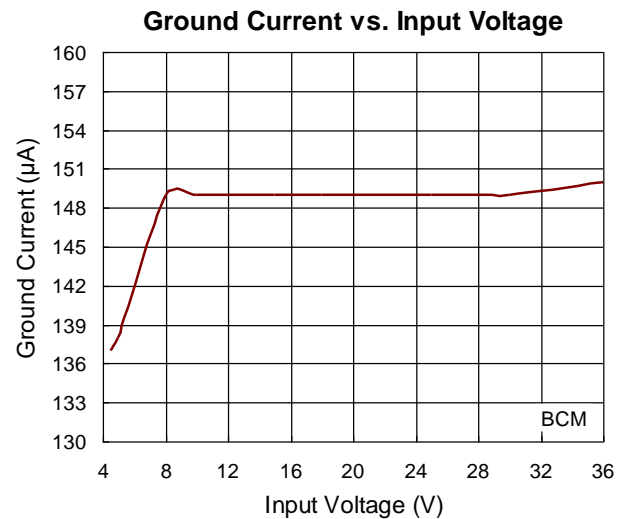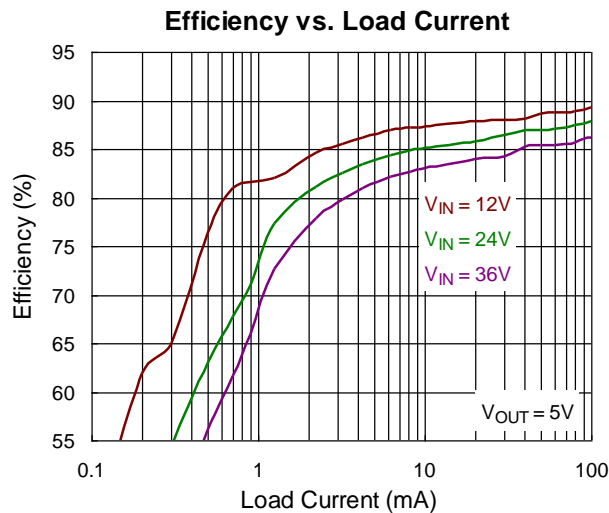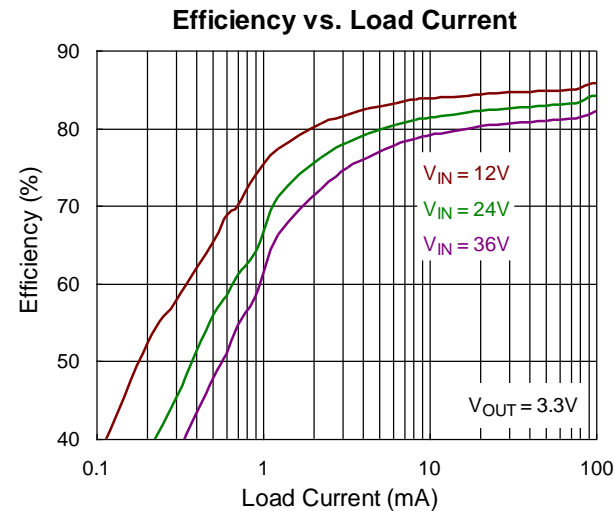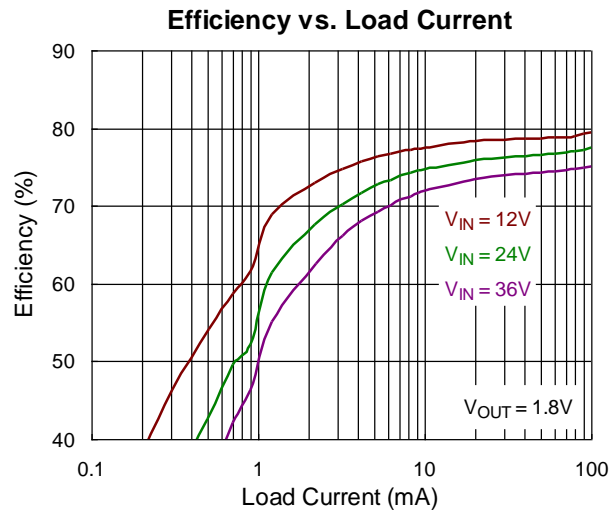



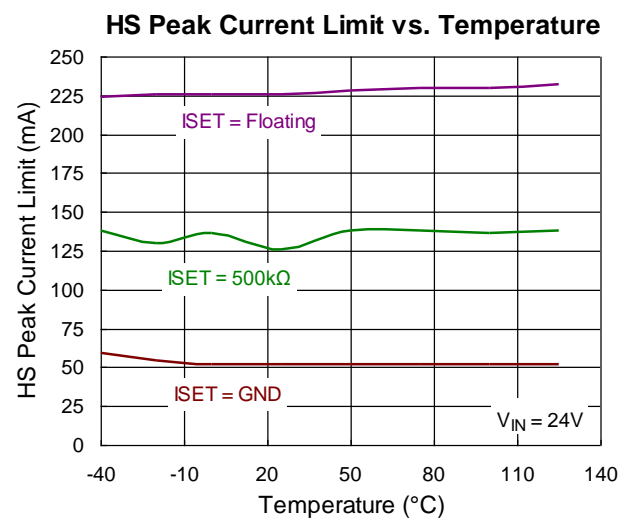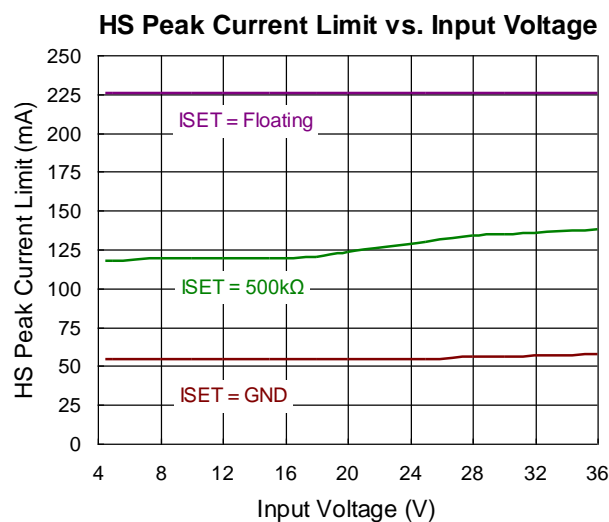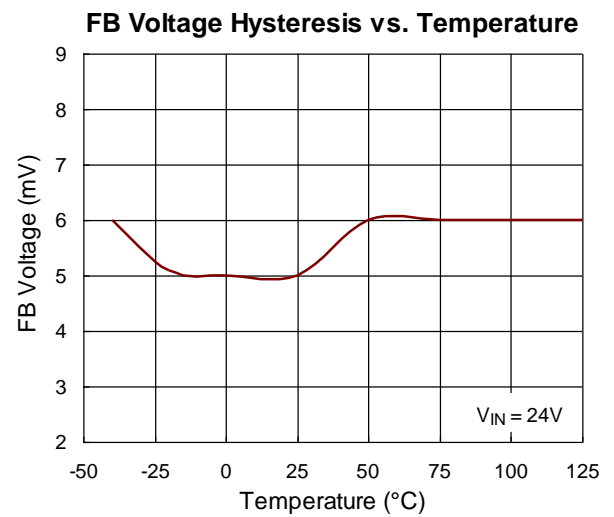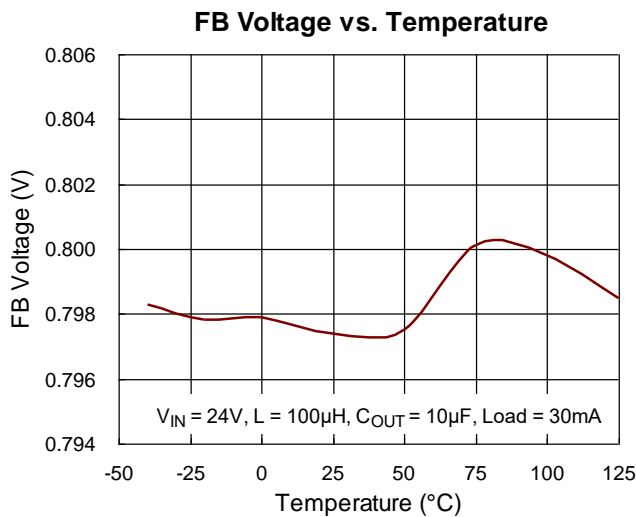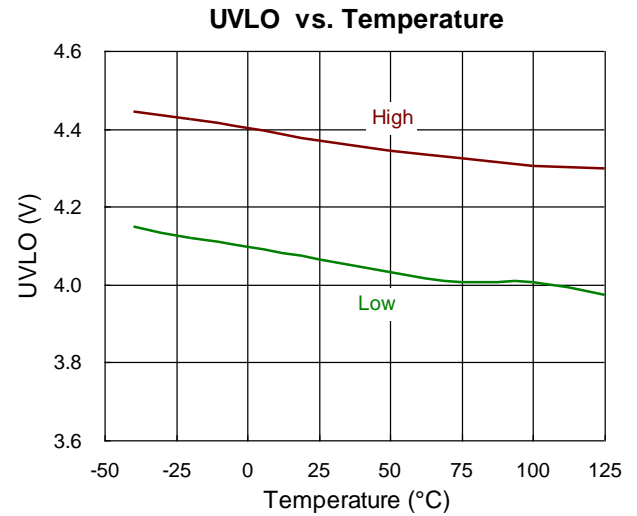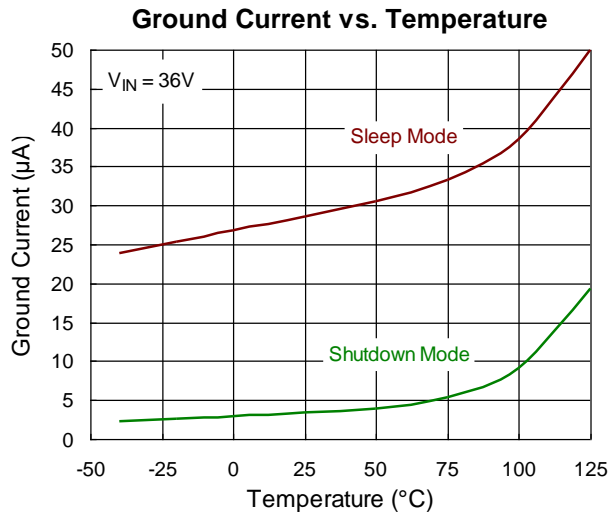




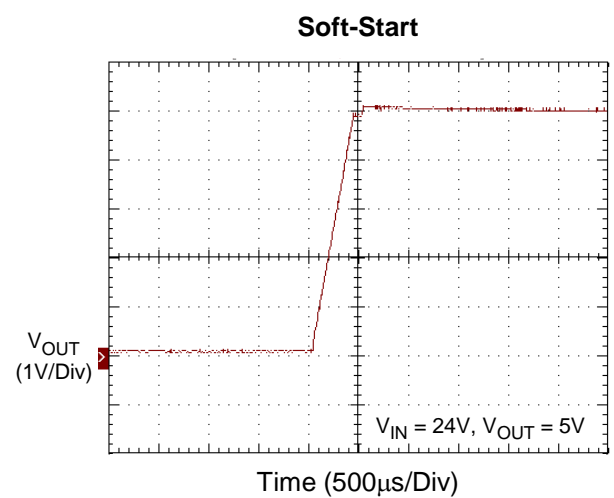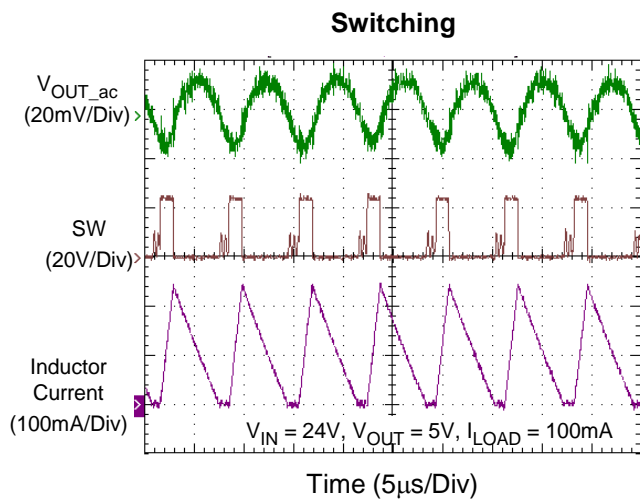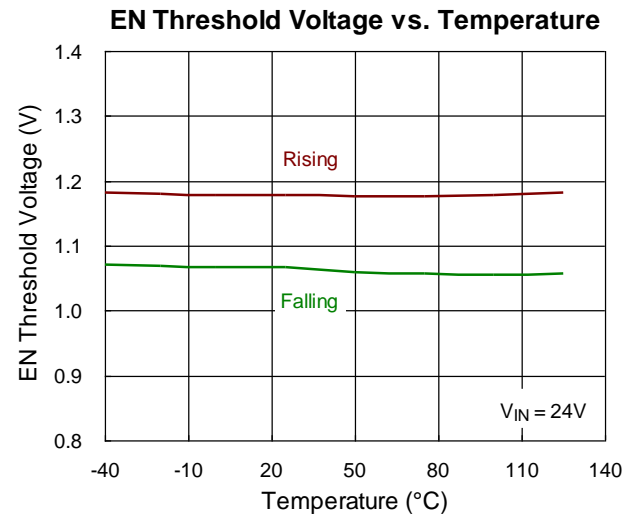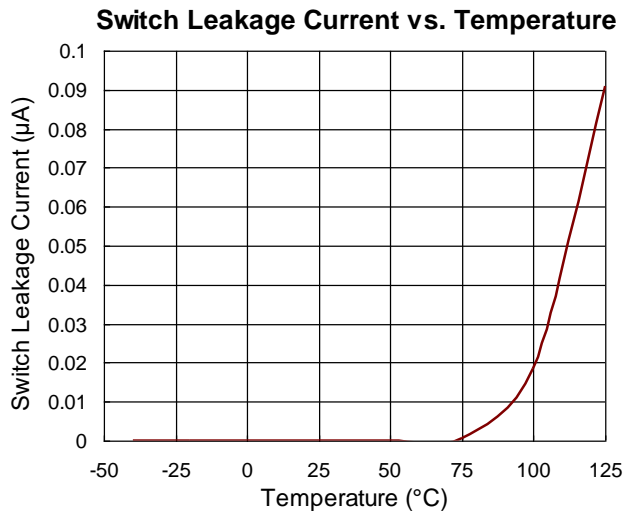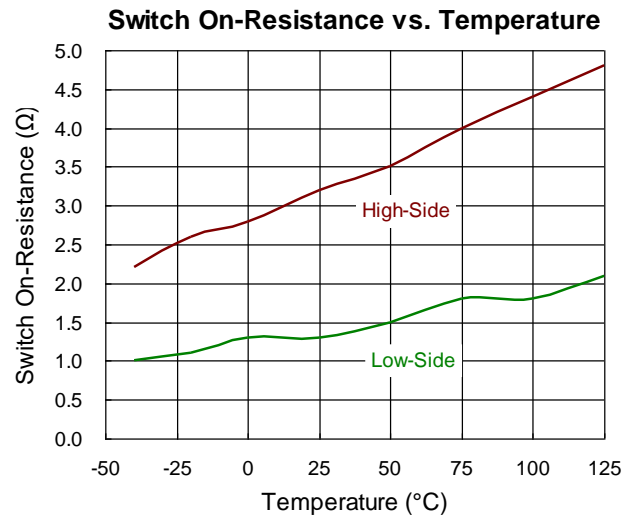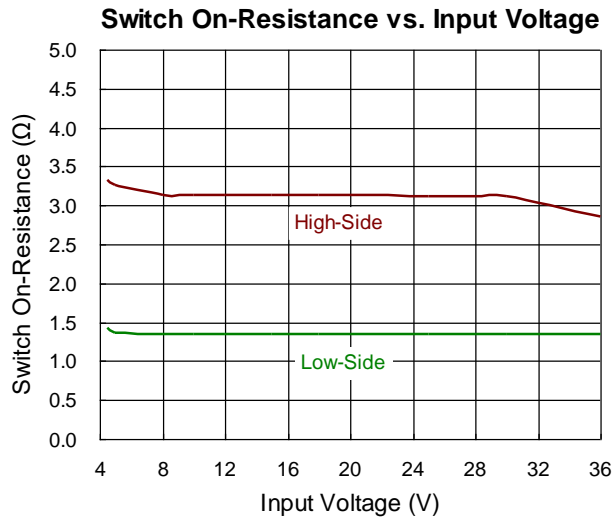




Load Transient Response

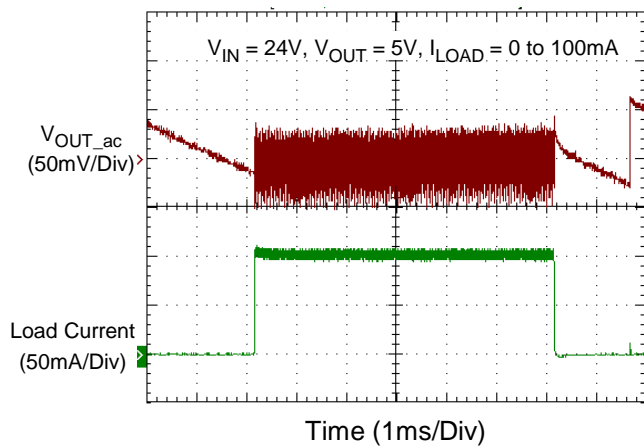

Short Circuit Response

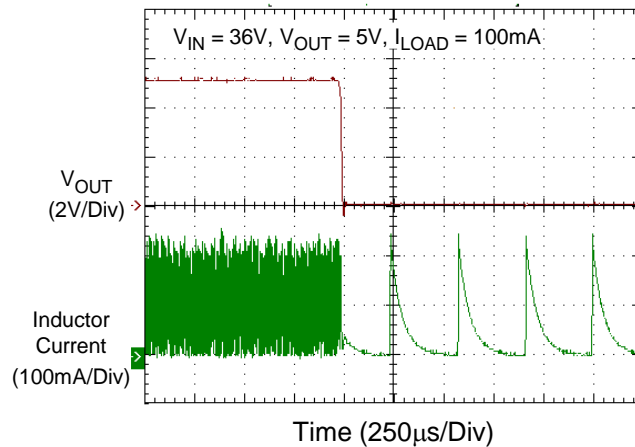



## 15 Operation

The RT6208 is a step-down DC/DC converter featuring internal power switches that utilize Hysteresis Mode control, combining low quiescent current for enhanced efficiency across a wide range of load currents. In Hysteresis Mode operation, the converter utilizes Boundary Conduction Mode (BCM) to regulate the flow of inductor current through the internal power switches. This is followed by a sleep cycle where the power switches are deactivated, and the load current is supported by the output capacitor. Notably, the RT6208 draws only 25 $\mu$ A of supply current during the sleep phase. Additionally, during light loads, the BCM cycles make up a small portion of the total cycle time, reducing the average supply current and significantly improving overall efficiency.

### 15.1 Hysteresis Mode Control

The feedback comparator in the RT6208 plays a crucial role in its operation. It continuously monitors the voltage on the VFB pin and compares it to an internal 800mV reference, as depicted in [Figure 1](#). When the voltage surpasses the reference, the comparator triggers a sleep mode, deactivating the power switches and current comparators, thereby reducing the supply current at the VIN pin to a mere 25 $\mu$ A. As the load current discharges the output capacitor, the voltage on the VFB pin decreases. Once this voltage falls 5mV below the 800mV reference, the feedback comparator initiates the Boundary Conduction Mode (BCM). During the initial phase of the BCM, the internal high-side power switch (P-channel MOSFET) is activated, causing the inductor current to rise. The inductor current continues to increase until it either exceeds the peak current comparator threshold or the ON time of the high-side MOSFET surpasses 5 $\mu$ s while the VFB voltage remains above 800mV. In such scenarios, the high-side power switch is turned off, and the low-side power switch is activated. The inductor current then decreases until the reverse current approaches zero. If the voltage on the VFB pin remains below the 800mV reference, the high-side power switch is reactivated, initiating another cycle to maintain the inductor current within the boundary conduction mode. Typically, the average current during the BCM exceeds the average load current. In this architecture, the maximum average output current is half of the peak current. The hysteresis nature of this control architecture results in a switching frequency that is contingent on the input voltage, output voltage, and inductor value. This behavior inherently provides short-circuit protection. In the event of a short circuit to ground, the inductor current decays gradually during a single switching cycle. Since the high-side switch only activates when the inductor current is near zero, the RT6208 naturally switches at a lower frequency during a short-circuit condition.

### 15.2 Enable Control

The RT6208 provides an EN pin, as an external chip enable control, to enable or disable the device. If VEN is held below a logic-low threshold voltage VEN\_R–VEN\_HYS (typically 1.1V) of the enable input (EN), the converter will enter shutdown mode. In this mode, the converter is disabled, and switching is inhibited even if the VIN voltage is above VIN undervoltage-lockout threshold VUVLO\_R (typically 4.2V). During shutdown mode, the supply current can be reduced to ISHDN (6 $\mu$ A or below). If the EN voltage rises above the logic-high threshold voltage VEN\_R (typically 1.2V) while the VIN voltage is higher than the UVLO threshold VUVLO\_R (typically 4.2V), the device will be turned on (switching being enabled and soft-start sequence being initiated).



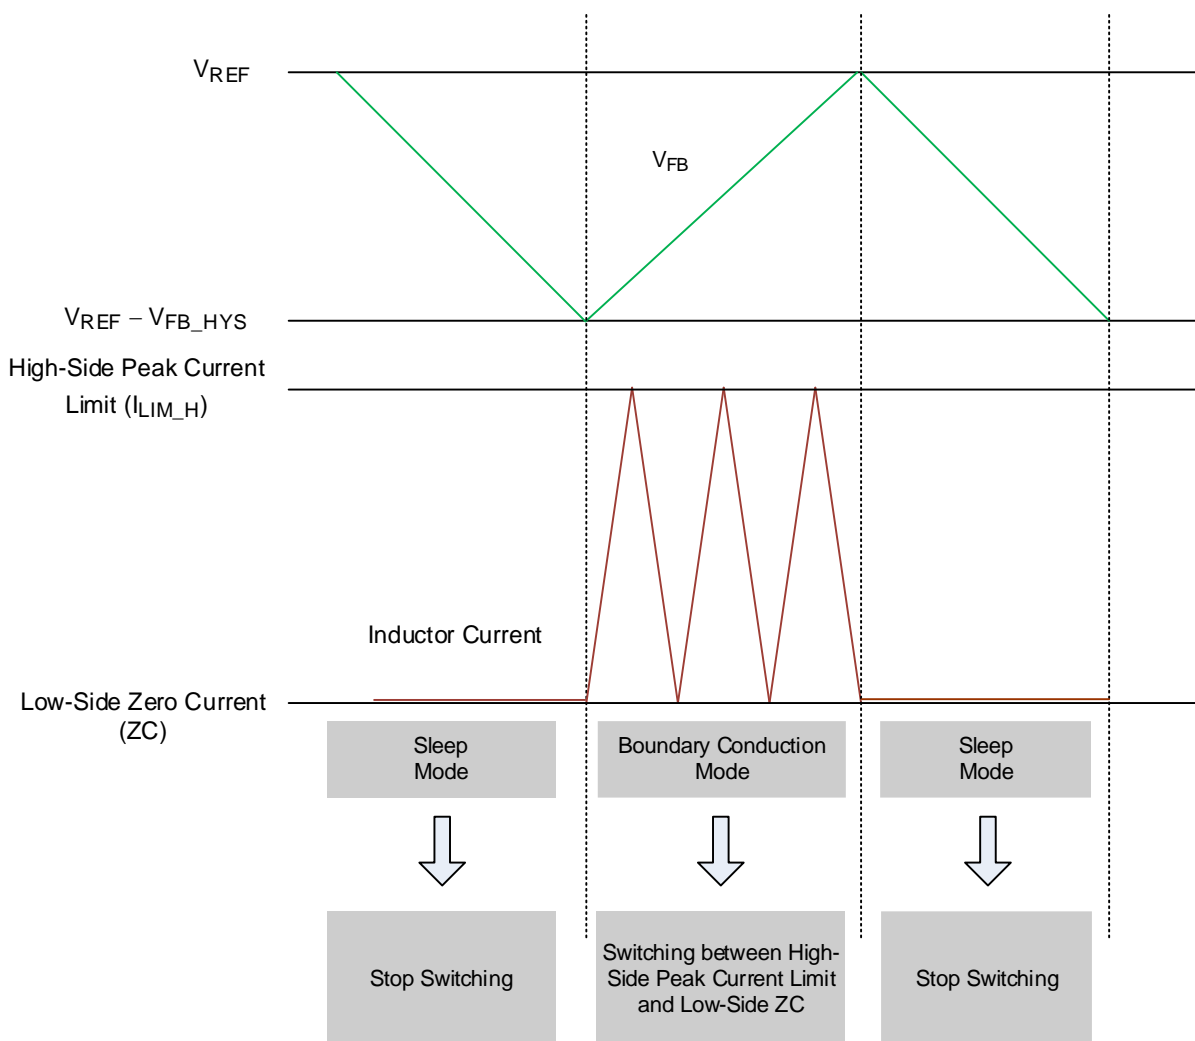


Figure 1. Hysteresis Mode Control

### 15.3 Input Undervoltage-Lockout

In addition to the EN pin, the RT6208 also provides enable control through the VIN pin. It features an undervoltage-lockout (UVLO) function that monitors the internal linear regulator. If  $V_{EN}$  rises above  $V_{EN\_R}$  first, switching will still be inhibited until the VIN voltage rises above  $V_{UVLO\_R}$ . This ensures that the internal regulator is ready, preventing the operation with not-fully-enhanced internal MOSFET switches. After the device is powered-up, if the input voltage VIN goes below the UVLO falling threshold voltage  $V_{UVLO\_R} - V_{UVLO\_HYS}$  (typically 3.9V), this switching will be inhibited. If VIN rises above the UVLO rising threshold  $V_{UVLO\_R}$  (typically 4.2V), the device will resume switching.

### 15.4 Soft-Start

The soft-start function prevents large inrush currents while the converter is being powered-up. The RT6208 provides an internal soft-start feature for inrush control. During the start-up sequence, the internal capacitor is charged by an internal current source  $I_{SS}$  to generate a soft-start ramp voltage as a reference voltage to the PWM comparator. The device will initiate switching, and the output voltage will smoothly ramp up to its target regulation voltage only after this ramp voltage is greater than the feedback voltage  $V_{FB}$  (typically 0.8V) to ensure a smooth start-up for the converters. The typical soft-start time is 1ms.



### 15.5 Power-Good Indicator

The RT6208GV8 (SOT-23-8 package) features an open-drain power-good output (PG) to monitor the output voltage status. The output delay of the comparator prevents false flag operation for short excursions in the output voltage, such as during line and load transients. Pull up PG with a resistor to  $V_{OUT}$  or an external voltage below 6V. The power-good function is activated after the soft-start is finished and is controlled by a comparator connected to the feedback signal  $V_{FB}$ . If  $V_{FB}$  rises above a power-good high threshold  $V_{PG}$  (typically 87.5% of  $V_{FB}$ ), the PG pin will be in high impedance and  $V_{PG}$  will be held high after a certain delay elapsed. When  $V_{FB}$  is below the power-good low threshold  $V_{PG} - V_{PG\_HYS}$  (typically 82.5% of  $V_{FB}$ ), the PG pin will be pulled low. Once started up, if any internal protection is triggered, PG will be pulled low to ground.

### 15.6 High-Side Switch Peak Overcurrent Protection

The RT6208 also includes a cycle-by-cycle peak-type overcurrent protection against conditions where the inductor current increases abnormally, even exceeding the inductor saturation current rating. To ensure that the low-side overcurrent protection functions properly, the inductor current through the high-side switch is measured only after a certain delay when the high-side switch is turned on. If an overcurrent condition occurs, the converter will immediately turn off the high-side switch and turn on the low-side switch to prevent the inductor current from exceeding the high-side switch peak current limit  $I_{LIM\_H1}$  (typically 225mA by setting ISET pin floating).

### 15.7 Over-Temperature Protection

The RT6208 includes an over-temperature protection (OTP) circuitry to prevent overheating due to excessive power dissipation. The OTP will shut down switching operation when the junction temperature exceeds the over-temperature protection threshold  $T_{OTP}$  (typically 150°C). Once the junction temperature cools down by the over-temperature protection hysteresis  $T_{OTP\_HYS}$  (typically 30°C), the IC will resume normal operation with a complete soft-start.



## 16 Application Information

(Note 8)

The suggested BOM is listed in the Typical Application Circuit section. The external component selection is determined by the maximum load current requirement and begins with the selection of the peak current programming resistor, R<sub>IS</sub>ET. The inductor value L can then be determined, followed by capacitors C<sub>IN</sub> and C<sub>OUT</sub>.

### 16.1 Inductor Selection

The inductor, input voltage, output voltage, and peak current determine the switching frequency of the RT6208. For a given input voltage, output voltage, and peak current, the inductor value sets the maximum switching frequency when the load current is close to 1/2 of the peak current. A good first choice for the inductor value can be determined by the following equation:

$$L = \left( \frac{V_{OUT}}{f_{MAX} \times I_{PEAK}} \right) \times \left( 1 - \frac{V_{OUT}}{V_{IN}} \right)$$

The variation in switching frequency is calculated based on the inductor, load current, input voltage, and output voltage. Large output capacitors will result in multiple switching cycles in Boundary Conduction Mode (BCM). The discharge time and charge time of the operation frequency can be calculated using the following equation:

Discharge time (Sleep Mode):

$$T1 = C_{OUT} \times \frac{V_{FB\_HYS}}{I_{LOAD}}$$

Charge time (Boundary Conduction Mode):

$$T2 = C_{OUT} \times \frac{V_{FB\_HYS}}{(0.5 \times I_{LIM\_H} - I_{LOAD})}$$

Operation Frequency:

$$f_{SW} = \frac{1}{T1 + T2}$$

### 16.2 Input Capacitor Selection

Input capacitance, C<sub>IN</sub>, is needed to filter the pulsating current at the drain of the high-side power MOSFET. The C<sub>IN</sub> should be sized to do this without causing a large variation in the input voltage. The peak-to-peak voltage ripple on the input capacitor can be estimated using the following equation:

$$\Delta V_{CIN} = D \times I_{OUT} \times \frac{1-D}{C_{IN} \times f_{SW}} + I_{OUT} \times ESR$$

where

$$D = \frac{V_{OUT}}{V_{IN} \times \eta}$$

Figure 2 shows the C<sub>IN</sub> ripple current flowing through the input capacitors and the resulting voltage ripple across the capacitors.

The equivalent series resistance (ESR) is very low for ceramic capacitors. The ripple caused by ESR can be ignored, and the minimum input capacitance can be estimated using the following equation:



$$C_{IN\_MIN} = I_{OUT\_MAX} \times \frac{D(1-D)}{\Delta V_{CIN\_MAX} \times f_{SW}}$$

where  $\Delta V_{CIN\_MAX} = 200\text{mV}$  for a typical application.

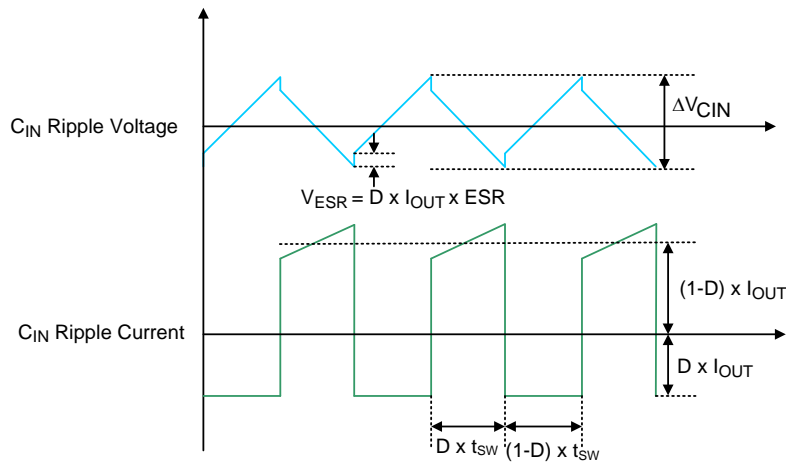


Figure 2.  $C_{IN}$  Ripple Voltage and Ripple Current

In addition, the input capacitor needs to have a very low ESR and must be rated to handle the worst-case RMS input current. The RMS ripple current ( $I_{RMS}$ ) of the converter can be determined by the input voltage ( $V_{IN}$ ), output voltage ( $V_{OUT}$ ), and rated output current ( $I_{OUT}$ ) using the following equation:

$$I_{RMS} \cong I_{OUT\_MAX} \times \frac{V_{OUT}}{V_{IN}} \times \sqrt{\frac{V_{IN}}{V_{OUT}} - 1}$$

From the above, the maximum RMS input ripple current occurs at maximum output load, which should be considered when evaluating the current capabilities of the input capacitors. The maximum ripple voltage usually occurs at 50% duty cycle, that is,  $V_{IN} = 2 \times V_{OUT}$ . It is common to use the worst-case  $I_{RMS} \cong 0.5 \times I_{OUT\_MAX}$  at  $V_{IN} = 2 \times V_{OUT}$  for design. Note that ripple current ratings from capacitor manufacturers are often based on only 2000 hours of life, which makes it advisable to further de-rate the capacitor, or choose a capacitor rated at a higher temperature than required.

Ceramic capacitors are ideal for switching regulator applications because of their small size, robustness, and very low ESR. However, care must be taken when these capacitors are used at the input. A ceramic input capacitor combined with trace or cable inductance forms a high-quality (under-damped) tank circuit. If the RT6208 circuit is plugged into a live supply, the input voltage can ring to twice its nominal value, possibly exceeding the device's rating. This situation is easily avoided by placing the low ESR ceramic input capacitor in parallel with a bulk capacitor with higher ESR to damp the voltage ringing.

The input capacitor should be placed as close as possible to the  $V_{IN}$  pins, with a low inductance connection to the GND of the IC. In addition to a larger bulk capacitor, one small ceramic capacitor of  $0.1\mu\text{F}$  should be placed close to the part.

### 16.3 Output Capacitor Selection

The output capacitor,  $C_{OUT}$ , filters the inductor's ripple current and stores energy to satisfy the load current when the RT6208 is in sleep mode. The value of the output capacitor must be large enough to accept the energy stored in the inductor without causing a significant change in the output voltage. To achieve an output voltage peak-peak ripple less than 1% of the output voltage, the output capacitor must be:



$$C_{OUT} \geq 50 \times L \times \left( \frac{I_{LIM\_H}}{V_{OUT}} \right)^2$$

#### 16.4 Peak Current Resistor Selection

The peak current comparator has a maximum current limit of 225mA nominally, resulting in a maximum average current of 112mA. For applications that demand less current, the peak current threshold can be reduced to as little as 50mA. The threshold can be easily programmed with an appropriately chosen resistor (RISET) between the ISET pin and ground. The value of the resistor for a particular peak current can be computed using the following equation:

$$RISET = (I_{LIM\_H} - 0.05) \times 5.88 \times 10^6$$

where  $50\text{mA} < I_{LIM\_H} < 225\text{mA}$ .

The peak current is internally limited to be within the range of 50mA to 225mA. Shorting the ISET pin to ground programs the current limit to 50mA, and leaving it floating sets the current limit to the maximum value of 225mA. When selecting this resistor value, be aware that the maximum average output current for this architecture is limited to half of the peak current. Therefore, be sure to select a value that sets the peak current with enough margin to provide adequate load current under all foreseeable operating conditions.

#### 16.5 Output Voltage Setting and Feedback Network

The resistive divider allows the FB pin to sense the output voltage. The output voltage is set by an external resistive voltage divider according to the following equation:

$$V_{OUT} = V_{REF} \times \left( 1 + \frac{R1}{R2} \right)$$

where  $V_{REF}$  is the reference voltage (typically 0.8V).

The resistive divider also attenuates the ripple signal on the FB pin. A small feed-forward capacitor,  $C_{FF}$ , can be added in parallel with the upper feedback resistor, R1. This helps to reduce switch-noise coupling on the FB pin and increases the FB pin ripple voltage to improve switching stability and avoid double pulses. The value of  $C_{FF}$  depends on the feedback network impedance and the peak-to-peak ripple voltage on the output. The recommended  $C_{FF}$  value ranges from 47pF to 470pF.

#### 16.6 Thermal Considerations

The junction temperature should never exceed the absolute maximum junction temperature  $T_{J(MAX)}$ , listed under Absolute Maximum Ratings, to avoid permanent damage to the device. The maximum allowable power dissipation depends on the thermal resistance of the IC package, the PCB layout, the rate of surrounding airflow, and the difference between the junction and ambient temperatures. The maximum power dissipation can be calculated using the following formula:

$$P_{D(MAX)} = (T_{J(MAX)} - T_A) / \theta_{JA}$$

where  $T_{J(MAX)}$  is the maximum junction temperature,  $T_A$  is the ambient temperature, and  $\theta_{JA}$  is the junction-to-ambient thermal resistance.

For recommended operating condition specifications, the maximum junction temperature is 125°C. The junction to ambient thermal resistance,  $\theta_{JA}$ , is layout dependent. For the SOT-23-6 package, the thermal resistance,  $\theta_{JA}$ , is 208.2°C/W on a standard JEDEC 51-7 four-layer thermal test board. For the SOT-23-8 package, the thermal resistance,  $\theta_{JA}$ , is 186.2°C/W on a standard JEDEC 51-7 four-layer thermal test board. The maximum power dissipation at  $T_A = 25^\circ\text{C}$  can be calculated by the following formula:



$P_{D(MAX)} = (125^{\circ}\text{C} - 25^{\circ}\text{C}) / (208.2^{\circ}\text{C/W}) = 0.48\text{W}$  for SOT-23-6 package

$P_{D(MAX)} = (125^{\circ}\text{C} - 25^{\circ}\text{C}) / (186.2^{\circ}\text{C/W}) = 0.53\text{W}$  for SOT-23-8 package

The maximum power dissipation depends on the operating ambient temperature for a fixed  $T_{J(MAX)}$  and thermal resistance,  $\theta_{JA}$ . The derating curves in [Figure 3](#) allow the designer to see the effect of rising ambient temperature on the maximum power dissipation.

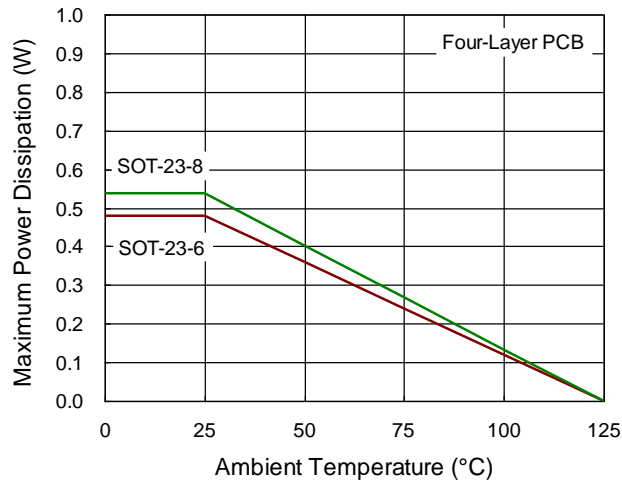


Figure 3. Derating Curve of Maximum Power Dissipation



## 16.7 Layout Considerations

Layout is very important in high-frequency switching converter design. If designed improperly, the PCB can radiate excessive noise and contribute to the converter instability. The following points must be considered before starting a layout for the RT6208.

- Place the input MLCC capacitors as close to the VIN and GND pins as possible. The major MLCC capacitors should be placed on the same layer as the RT6208.
- Keep the high-current paths short, especially at the ground terminals. This practice is essential for stable, jitter-free operation. The high-current path comprising of the input capacitor, high-side FET, inductor, and the output capacitor should be as short as possible. This practice is essential for high efficiency.
- The SW node has a high-frequency voltage swing and should be kept to a small area. Keep analog components away from the SW node to prevent stray capacitive noise pickup.
- Connect the feedback network behind the output capacitors. Place the feedback components next to the FB pin. For better thermal performance, design a wide and thick plane for the GND pin or to add a lot of vias to the GND plane. The examples of PCB layout guides are shown in [Figure 4](#) and Figure 5.

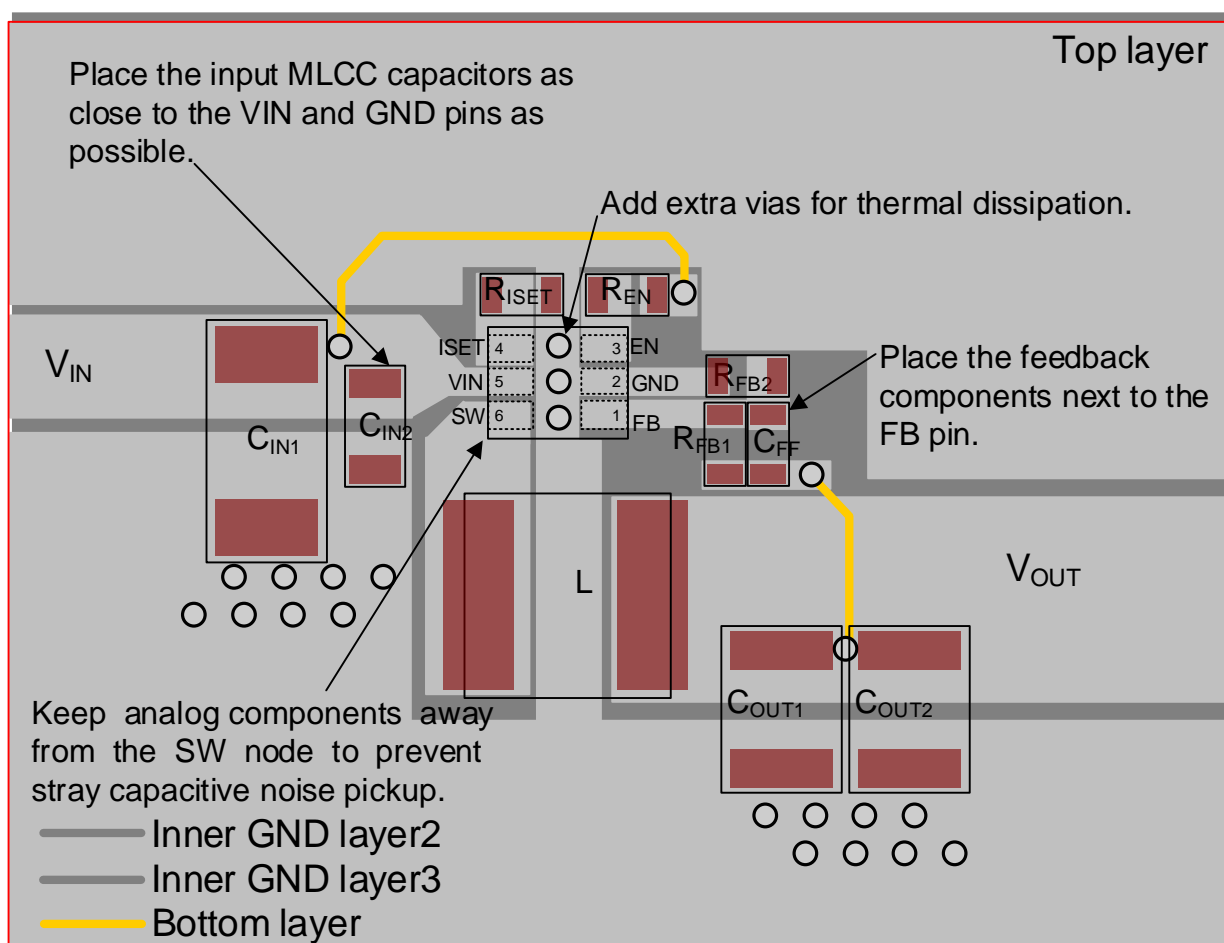


Figure 4. SOT-23-6 PCB Layout Guide




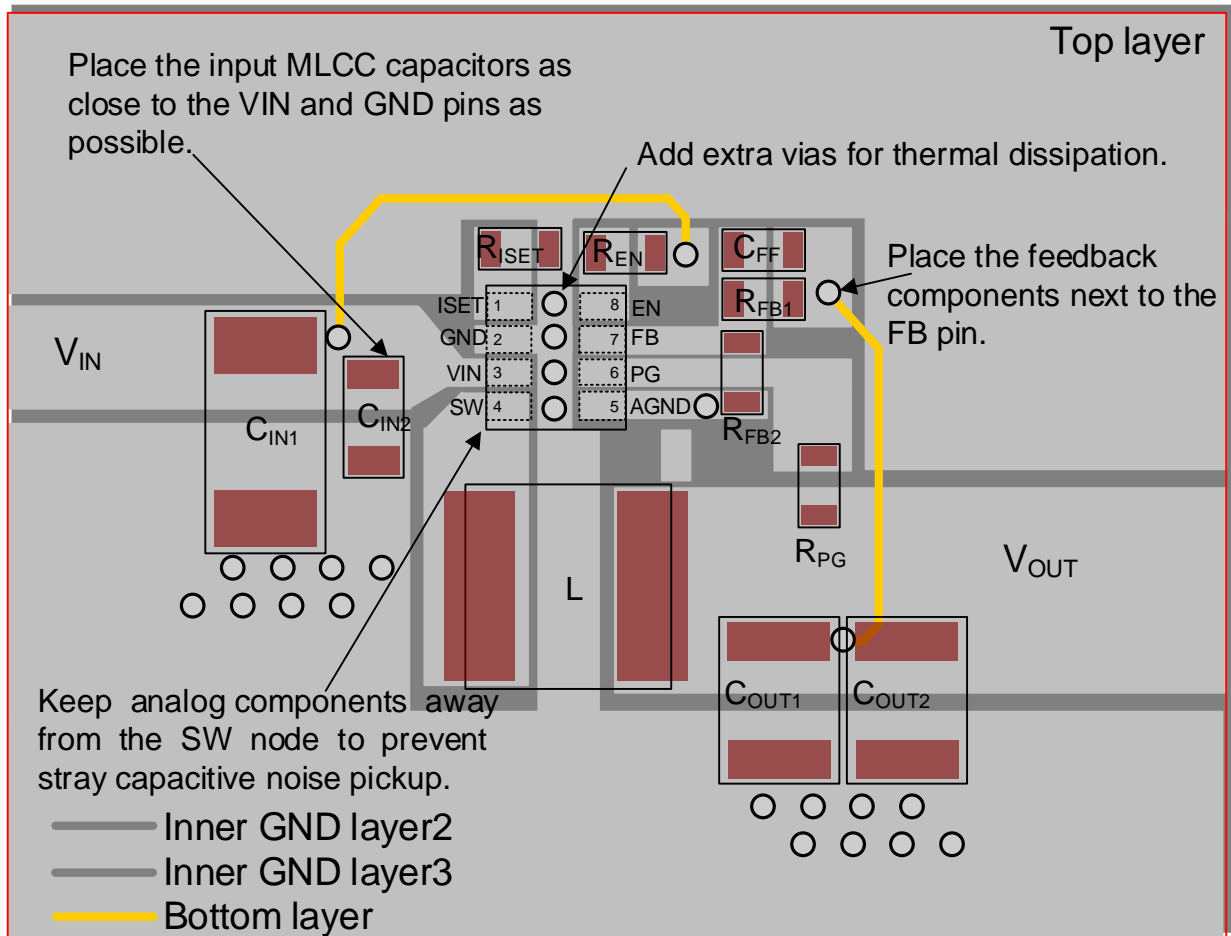


Figure 5. SOT-23-8 PCB Layout Guide

**Note 8.** The information provided in this section is for reference only. The customer is solely responsible for the designing, validating, and testing your product incorporating Richtek's product and ensure such product meets applicable standards and any safety, security, or other requirements.




## 17 Outline Dimension

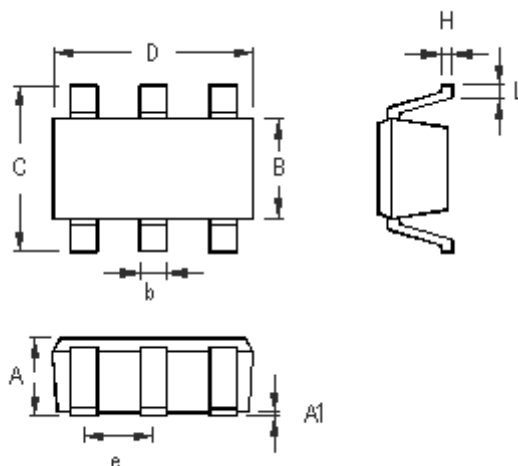

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.889	1.295	0.031	0.051
A1	0.000	0.152	0.000	0.006
B	1.397	1.803	0.055	0.071
b	0.250	0.560	0.010	0.022
C	2.591	2.997	0.102	0.118
D	2.692	3.099	0.106	0.122
e	0.838	1.041	0.033	0.041
H	0.080	0.254	0.003	0.010
L	0.300	0.610	0.012	0.024

SOT-23-6 Surface Mount Package



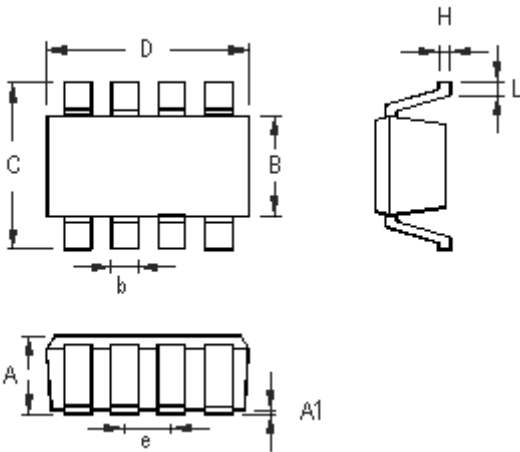


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.000	1.450	0.039	0.057
A1	0.000	0.150	0.000	0.006
B	1.500	1.700	0.059	0.067
b	0.220	0.500	0.009	0.020
C	2.600	3.000	0.102	0.118
D	2.800	3.000	0.110	0.118
e	0.585	0.715	0.023	0.028
H	0.100	0.220	0.004	0.009
L	0.300	0.600	0.012	0.024


**SOT-23-8 Surface Mount Package**



18 Footprint Information

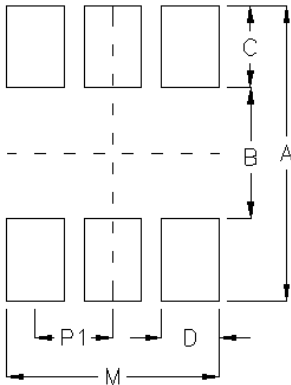

Package	Number of Pin	Footprint Dimension (mm)						Tolerance
		P1	A	B	C	D	M	
TSOT-26/TSOT-26(FC)/SOT-26/SOT-26(COL)	6	0.95	3.60	1.60	1.00	0.70	2.60	±0.10


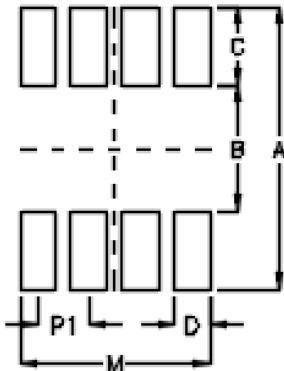


Package	Number of Pin	Footprint Dimension (mm)						Tolerance
		P1	A	B	C	D	M	
TSOT-28/TSOT-28(FC)/SOT-28	8	0.65	3.60	1.60	1.00	0.45	2.40	±0.10




19 Packing Information

19.1 SOT-23-6 Tape and Reel Data

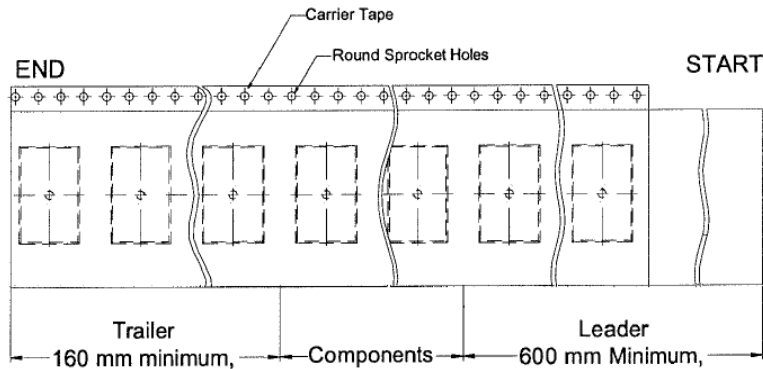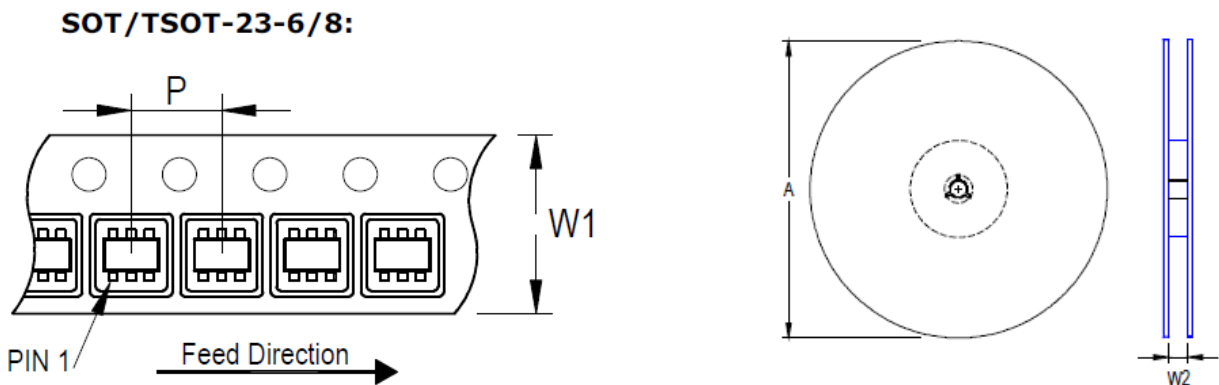

Package Type	Tape Size (W1) (mm)	Pocket Pitch (P) (mm)	Reel Size (A)		Units per Reel	Trailer (mm)	Leader (mm)	Reel Width (W2) Min./Max. (mm)
			(mm)	(in)				
SOT/TSOT-23-6	8	4	180	7	3,000	160	600	8.4/9.9

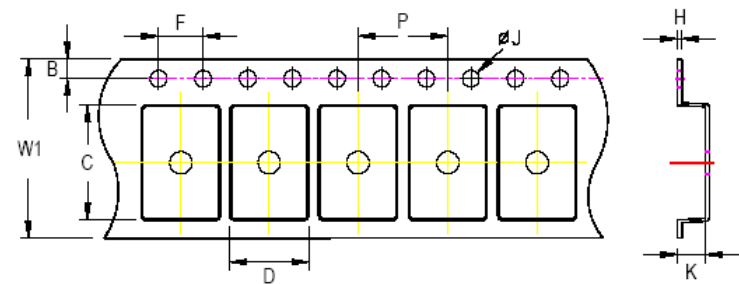







**C, D, and K are determined by component size.**  
**The clearance between the components and the cavity is as follows:**  
**- For 8mm carrier tape: 0.5mm max.**

Tape Size	W1	P		B		F		ØJ		H
	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Max.
8mm	8.3mm	3.9mm	4.1mm	1.65mm	1.85mm	3.9mm	4.1mm	1.5mm	1.6mm	0.6mm



19.2 SOT-23-6 Tape and Reel Packing

Step	Photo/Description	Step	Photo/Description
1	 Reel 7"	4	 3 reels per inner box <b>Box A</b>
2	 HIC & Desiccant (1 Unit) inside	5	 12 inner boxes per outer box
3	 Caution label is on backside of Al bag	6	 Outer box <b>Carton A</b>

Package	Reel		Box			Carton		
	Size	Units	Item	Reels	Units	Item	Boxes	Unit
SOT/TSOT-23-6	7"	3,000	Box A	3	9,000	Carton A	12	108,000
			Box E	1	3,000	For Combined or Partial Reel.		





19.3 SOT-23-6 Packing Material Anti-ESD Property

Surface Resistance	Aluminum Bag	Reel	Cover tape	Carrier tape	Tube	Protection Band
$\Omega/\text{cm}^2$	$10^4 \text{ to } 10^{11}$	$10^4 \text{ to } 10^{11}$	$10^4 \text{ to } 10^{11}$	$10^4 \text{ to } 10^{11}$	$10^4 \text{ to } 10^{11}$	$10^4 \text{ to } 10^{11}$




## 19.4 SOT-23-8 Tape and Reel Data

### SOT/TSOT-23-6/8:

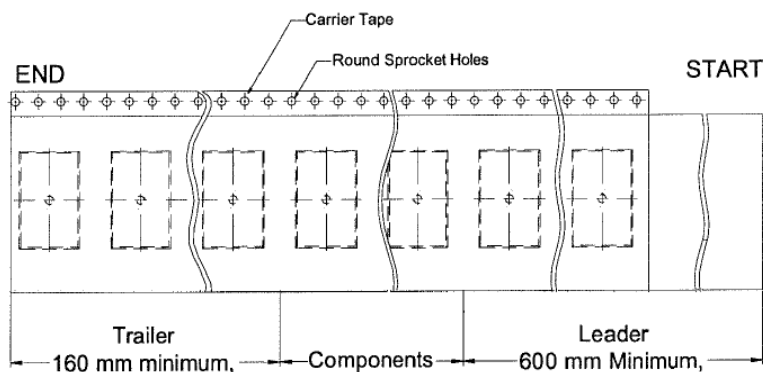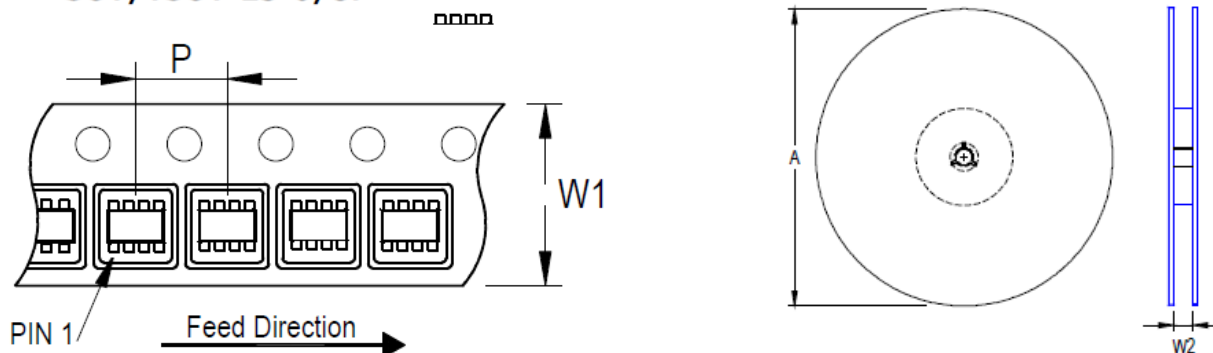

Package Type	Tape Size (W1) (mm)	Pocket Pitch (P) (mm)	Reel Size (A)		Units per Reel	Trailer (mm)	Leader (mm)	Reel Width (W2) Min./Max. (mm)
			(mm)	(in)				
SOT/TSOT-23-8	8	4	180	7	3,000	160	600	8.4/9.9

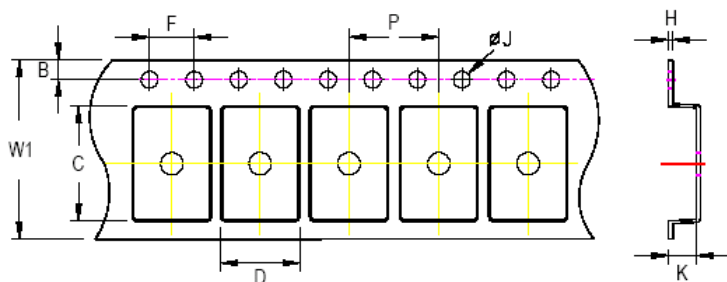







C, D, and K are determined by component size.  
The clearance between the components and the cavity is as follows:  
- For 8mm carrier tape: 0.5mm max.

Tape Size	W1	P		B		F		ØJ		H
	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Max.
8mm	8.3mm	3.9mm	4.1mm	1.65mm	1.85mm	3.9mm	4.1mm	1.5mm	1.6mm	0.6mm



19.5 SOT-23-8 Tape and Reel Packing

Step	Photo/Description	Step	Photo/Description
1	 <p>Reel 7"</p>	4	 <p>3 reels per inner box <b>Box A</b></p>
2	 <p>HIC &amp; Desiccant (1 Unit) inside</p>	5	 <p>12 inner boxes per outer box</p>
3	 <p>Caution label is on backside of Al bag</p>	6	 <p>Outer box <b>Carton A</b></p>

<div> <div>Container</div> <div>Package</div> </div>	Reel		Box			Carton		
	Size	Units	Item	Reels	Units	Item	Boxes	Unit
SOT/TSOT-23-8	7"	3,000	Box A	3	9,000	Carton A	12	108,000
			Box E	1	3,000	For Combined or Partial Reel.		



## 19.6 SOT-23-8 Packing Material Anti-ESD Property

Surface Resistance	Aluminum Bag	Reel	Cover tape	Carrier tape	Tube	Protection Band
$\Omega/\text{cm}^2$	$10^4$ to $10^{11}$	$10^4$ to $10^{11}$	$10^4$ to $10^{11}$	$10^4$ to $10^{11}$	$10^4$ to $10^{11}$	$10^4$ to $10^{11}$

## Richtek Technology Corporation

14F, No. 8, Tai Yuen 1<sup>st</sup> Street, Chupei City

Hsinchu, Taiwan, R.O.C.

Tel: (8863)5526789

RICHTEK

Richtek products are sold by description only. Richtek reserves the right to change the circuitry and/or specifications without notice at any time. Customers should obtain the latest relevant information and data sheets before placing orders and should verify that such information is current and complete. Richtek cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Richtek product. Information furnished by Richtek is believed to be accurate and reliable. However, no responsibility is assumed by Richtek or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Richtek or its subsidiaries.

Copyright © 2024 Richtek Technology Corporation. All rights reserved. **RICHTEK** is a registered trademark of Richtek Technology Corporation.

www.richtek.com

DS6208-03 August 2024



## 20 Datasheet Revision History

Version	Date	Description	Item
03	2024/7/17	Modify	<p><i>General Description on page 1</i></p> <p>-Modified description</p> <p><i>Features on page 1</i></p> <p>-Added output voltage range</p> <p>-Renamed thermal shutdown protection to over-temperature protection</p> <p><i>Ordering Information on page 1</i></p> <p>-Added note</p> <p><i>Simplified Application Circuit on page 2</i></p> <p>-Added simplified application circuit</p> <p><i>Pin Configuration on page 2</i></p> <p>-Renamed pin name to PG</p> <p><i>Functional Pin Description on page 4</i></p> <p>-Modified pin description</p> <p><i>Functional Block Diagram on page 5</i></p> <p>-Renamed function name to PG</p> <p><i>Typical Application Circuit on page 8</i></p> <p>-Added recommended typical application circuit BOM</p> <p><i>Operation on page 16</i></p> <p>-Added enable control, input UVLO, soft-start, PG indicator, high-side switch overcurrent protection, and OTP</p> <p>-Modified Scheme of Hysteresis Mode</p> <p><i>Application Information on page 18, 19, 20, 21</i></p> <p>-Modified input and output capacitors and inductor selection</p> <p><i>Footprint Information on page 25</i></p> <p>-Added footprint information</p> <p><i>Packing Information on page 26, 27, 28, 29, 30, 31</i></p> <p>-Added packing information</p>



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Richtek:](#)

[RT6208GE](#)