


## Analogue block Series C74

Description **C74-ANALOG 0-10V**

Article number **6613299077**

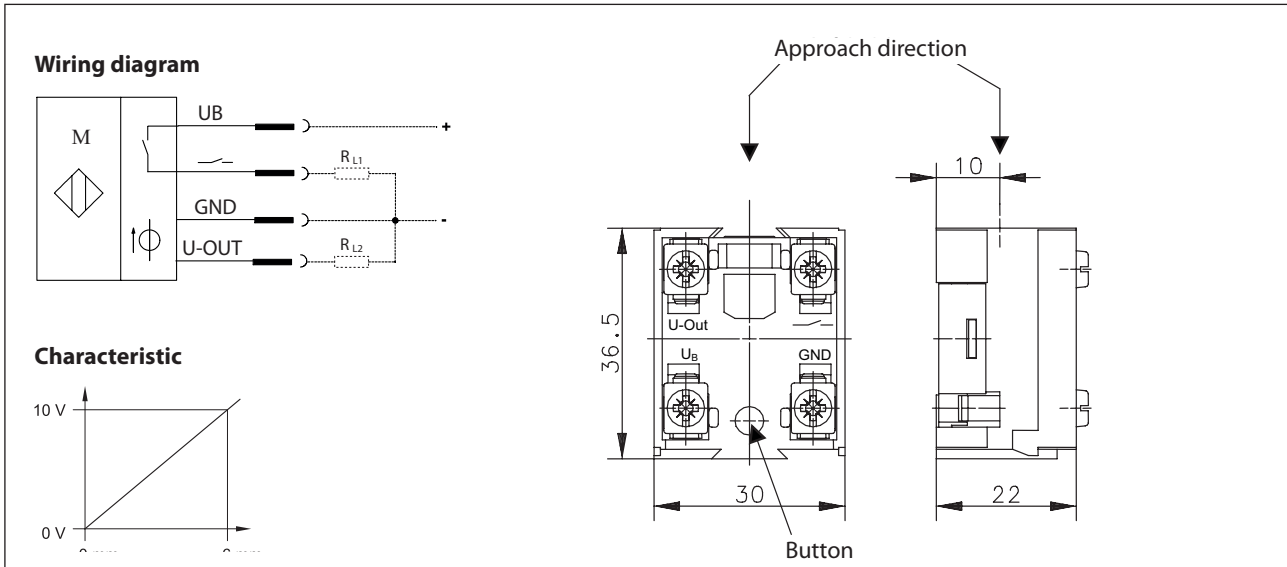

### Identifying characteristics in accordance with EN 60947-5-7

Electrical Data		
Rated operating voltage range	$U_B$	12 - 26 V DC
Idle current	$I_o$	< 25 mA
Short-circuit protection type		synchronising, permanently short-circuit and overload protected
Reverse polarity		yes
Readiness delay	$t_v$	< 50 ms
Analogue output		
Voltage output		0 – 10 V
Linearity errors max.		± 2,5 % from the end value (10 V), $U_B$ and temperature at a constant level
Temperature errors max.		± 10 % $U_B$ constant level
Repetition accuracy	R	≤ 2 % from the end value (10 V), $U_B$ and temperature at a constant level
min. Load resistance	$R_{L2}$	2 kΩ
Switching output		
switching element function	S	PNP NO (teachable)
Hysteresis	H	≈ 10 %
Voltage drop	$U_d$	≤ 1,6 V
Utilization category		DC 12
Rated operational currents	$I_e$	200 mA
Minimum operating current	$I_m$	1 mA
Residual current	$I_r$	< 0,1 mA
Switching frequency		max. 100/min.

Electromagnetic compatibility (EMC) <sup>1)</sup>		
Immunity to Electrostatic Discharge	IEC 61000-4-2	(only in installed condition)
Interference resistance against high-frequency electromagnetic fields	IEC 61000-4-3	
Immunity to fast transient interference variables (bursts)	IEC 61000-4-4	
Immunity to conducted interference induced by radio frequency fields	IEC 61000-4-6	
Immunity against magnetic fields with power frequency	IEC 61000-4-8	
Conducted disturbances/Interference voltage/Interference currents	EN 55011 class B	
Radiated disturbances/electric field strength	EN 55011 class B	

Mechanical data	
Actuating travel	6 mm
Actuating force	2,3 N
Enclosure	Thermoplastic, glass fibre-reinforced
Actuation	Plunger internally, Ø8
Ambient temperature	-30 °C ... +80 °C
Mechanical life	10 x 10 <sup>6</sup> switching operations
Type of connection	4 Screw connections (M3,5)
Conductor cross-sections	Solid: 0.5 ... 1.5 mm <sup>2</sup> Litz wire with ferrules: 0.5 ... 1.5 mm <sup>2</sup>
Installation position	any
Protection type	IP00 acc. to EN 60529

Accessories	
	1 x mounting adapter
	1 x impact pin
	installation material

Actuation
The actuation is only started from approach direction.

EU Conformity <sup>1)</sup>
acc. to directive 2014/30/EU (EMC-Directive)

Notes
Due to the open structure of the analogue block, there is no special protection against infiltration of water and against contact with voltage-carrying parts! The reliable switching function is only given in BERNSTEIN switching devices!
<sup>1)</sup> To be conform with the EMC-Directive (2014/30/EU) a shielded connection cable has to be used.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Altech:](#)

[661.3299.077](#)