

PCB Terminal Block


7.62 mm Pin Spacing

- Board Mount PCB
- 12A Current Rating
- Height 12.6mm
- Modular / stackable, no dovetail version



MVS13xx-7,62-V

Front Wire Entry



Electrical Ratings

		UL E178356		IEC	VDE N.40019705
Usergroup	B	C	D	-	
Rated Voltage	300V	-	300V	450V	
Rated Current	12A	-	12A	17.5A	
Wire Size	<i>solid</i>	30-16 AWG	-	30-16 AWG	0.25mm ² - 1.5mm ²
	<i>stranded</i>	30-16 AWG	-	30-16 AWG	0.25mm ² - 1.5mm ²

Ordering Information

No. Poles	Length (mm)	Std. Pack	Order # - Modular	Order # - No Dovetails
2	10.5	200	MVS132-7,62-V	MVS132-7,62-V-L
3	17.5	200	MVS133-7,62-V	MVS133-7,62-V-L
4	24.5	200	MVS134-7,62-V	MVS134-7,62-V-L
5	31.5	200	MVS135-7,62-V	MVS135-7,62-V-L
6	38.5	200	MVS136-7,62-V	MVS136-7,62-V-L
7	45.5	200	MVS137-7,62-V	MVS137-7,62-V-L
8	52.5	200	MVS138-7,62-V	MVS138-7,62-V-L
9	59.5	200	MVS139-7,62-V	MVS139-7,62-V-L
10	66.5	200	MVS1310-7,62-V	MVS1310-7,62-V-L
11	73.5	200	MVS1311-7,62-V	MVS1311-7,62-V-L
12	80.5	200	MVS1312-7,62-V	MVS1312-7,62-V-L


Material Specifications

Clamp	Nickeled Copper
Solder tab	Tin-Plated Copper
Screw	Galvanized Steel
Insulating Material	Polyamide
Flammability Class	V0 UL94
Operating Temperature	-30°C - +105°C


Installation Data

Screw Size	M2
Torque	0.2Nm (1.8 lb.in.)
Stripping Length	max. 6mm
Clamp Opening	1.8 x 2.6mm
PCB Hole Size	1.3mm

Dimensions (mm)

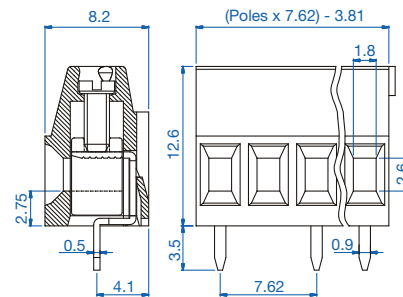

Drilling Diagram

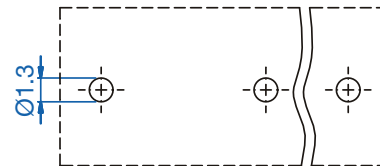

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Altech:](#)

[MVS132-7,62-V](#) [MVS135-7,00-V-L](#) [MVS132-7,00-V](#) [MVS136-7,00-V-L](#) [MVS132-7,62-V-L](#) [MVS136-7,62-V](#)
[MVS133-7,62-V](#) [MVS133-7,00-V-L](#) [MVS135-7,00-V](#) [MVS134-7,00-V-L](#) [MVS136-7,62-V-L](#) [MVS131-7,00-V-L](#)
[MVS133-7,00-V](#) [MVS136-7,00-V](#) [MVS135-7,62-V-L](#) [MVS131-7,62-V](#) [MVS134-7,00-V](#) [MVS131-7,00-V](#) [MVS134-](#)
[7,62-V](#) [MVS134-7,62-V-L](#) [MVS131-7,62-V-L](#) [MVS132-7,00-V-L](#) [MVS135-7,62-V](#) [MVS133-7,62-V-L](#)