

Additional Resources: Product Page

date 09/11/2024

page 1 of 3

MODEL: GF0401M | DESCRIPTION: SPEAKER

FEATURES

- 40 mm
- round frame
- 0.04 W
- ·8Ω
- ferrite magnet
- PET cone






SPECIFICATIONS


parameter	conditions/description	min	typ	max	units
input power			0.04	0.1	W
impedance	at 1.0 kHz, 0.57 V	6.8	8	9.2	Ω
resonant frequency (Fo)	at 0.57 V	144	180	216	Hz
frequency response		Fo		20,000	Hz
sound pressure level	at 1 mW (0.089 V), 10 mm, 1.0 kHz with IEC-318	118	121	124	dB
buzz, rattle, etc.	must be normal at sine wave			0.57	V
dimensions	Ø40 x 9.3				mm
magnet	ferrite				
cone material	mylar				
terminal	PET pads				
weight			17.8		g
operating temperature		-25		60	°C
hand soldering	for maximum 3 seconds	340	350	360	°C
RoHS	yes				

MECHANICAL DRAWING

units: mm


tolerance: ±0.3 mm

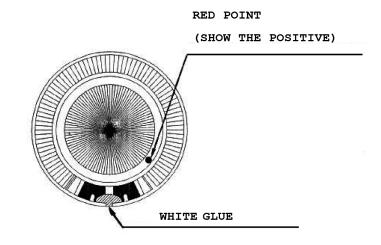



FREQUENCY RESPONSE CURVE

parameter	conditions/description	
potentiometer range	50 dB	
rectifier	RMS	
lower limit frequency	20 Hz	
wr. speed	100 mm/sec	
zero level	80 dB	

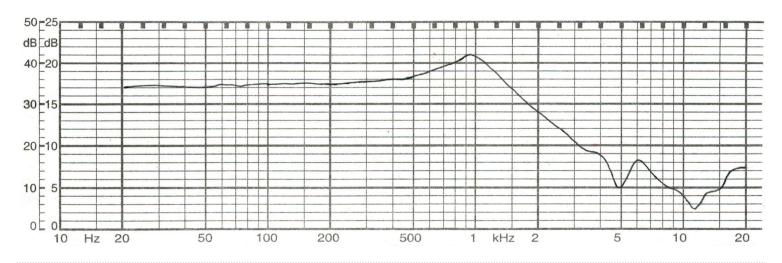

REVISION HISTORY

rev.	description	date	
1.0	initial release	07/27/2006	
1.01	updated template, input power, SPL, frequency response curve, and mechanical drawing	06/01/2012	
1.02	updated SPL and frequency response curve	03/11/2013	
1.03	brand update	10/15/2020	
1.04	logo, datasheet style update	08/05/2022	
1.05	CUI Devices rebranded to Same Sky	09/11/2024	

The revision history provided is for informational purposes only and is believed to be accurate.



Same Sky offers a one (1) year limited warranty. Complete warranty information is listed on our website.

Same Sky reserves the right to make changes to the product at any time without notice. Information provided by Same Sky is believed to be accurate and reliable. However, no responsibility is assumed by Same Sky for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

Same Sky products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Same Sky:

<u>GF0401M</u>