

	REVISIONS							
REV	ECO	DESCRIPTION	DATE	BY	APPR			
A3	-	RELEASE NEW DWG FORMAT	11DEC13	DRP				
A4	C0540S	UPDATE DIMENSIONS	05JUL16	JONY	TOMMY			
A5	-	ADD COLOR OPTION	23NOV20	LOUIE	TOMMY			


PLUG, 4 SOCKET, AT SERIES, STRAIN RELIEF END CAP


DWG NO:

AT06-4S-SR01XXX

REV:

Α5





NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL:

Λ


HOUSING: THERMOPLASTIC SEAL: SILICONE RUBBER

- 2. MODIFICATIONS: STRAIN RELIEF END CAP
- 3. SPECIFICATIONS:
  - 3.1 CURRENT RATING: 13 AMPS
  - 3.2 OPERATING TEMPERATURE: -55°C TO +125°C
  - 3.3 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.
  - 3.4 INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 25°C.
  - 3.5 MOISTURE RESISTANCE:


IP68(1M OF WATER FOR A PERIOD OF 24 HOURS, MATED CONDITION) IP69K(MATED CONDITION)


- 3.6 MATING CYCLE DURABILITY: 100 CYCLES
- 3.7 RoHS COMPLIANT
- 4. MATING PART: AT04-4P\* RECEPTACLE (\* = MODIFICATIONS AND COLORS)
- 5. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

1		MAX. INSUL	TYPICAL
SIZE	O.D.	O.D.	WIRE RANGE
16	2.24 mm (.088 in)	3.68 mm (.145 in)	14 - 20 AWG (2.0-0.5mm²)



PART NUMBER CHART				
COLOR	PART NUMBER			
GREY	AT06-4S-SR01GRY			
BLACK	AT06-4S-SR01BLK			
BLUE	AT06-4S-SR01BLU			
BROWN	AT06-4S-SR01BRN			
GREEN	AT06-4S-SR01GRN			
RED	AT06-4S-SR01RED			
WHITE	AT06-4S-SR01WHT			
YELLOW	AT06-4S-SR01YEL			
ORANGE	AT06-4S-SR01ORG			



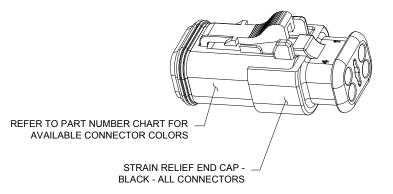

	SEE PART N	PART NUMBER CHART						
	PART NUMBER			DESCRIPTION				
QUANTITY		ı	MATERIALS LIST					
	UNLESS OTHERWISE SPECIFIED		SIGNATURES		Amphonol			
1) All dimensions are in metric(mm). 2) Tolerances are as follows: 1 PL DEC ±0.30   Fractions ±1/64		DRAWN:	LOUIE	23NOV20	Amphenol			
2 PL DEC ±0.15 3 PL DEC ±0.08	Angles ±1°	CHECKED:	ORION	25NOV20	Sine Systems - www.amphenol-sine.com			
3) Note reference	3) Note reference = X  MATERIAL SPECIFICATIONS:				44724 Morley Drive			
MATERIAL SPECIFICA			TOMMY	27NOV20	Clinton Township, MI 48036			
		CUSTOMER:			PLUG, 4 SOCKET, AT SERIES,			
			THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY, DESIGN FEATURES.		STRAIN RELIEF END CAP			
PROCESS SPECIFICATIONS:  NEXT ASSY:		SPECIFICATIONS AND PERFORMANCE DATA SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL		RMANCE DATA ROPERTY OF ON. NO RIGHTS LIED. ALL	B C- AT06-4S-SR01XXX	A5		
				is.	SCALE: NONE SHEET 1	of <b>1</b>		

## **AT Series™** - Contact Size 16 Options

Machined Contacts, Sockets & Pins							
Part Number	Description		AWG	Туре			
AT60-215-1631	Male Contact - Pin, Gold-plated	16	14	Machined			
AT62-209-1631	Female Contact - Socket, Gold-plated	16	14	Machined			
AT60-215-16141	Male Contact - Pin, Nickel-plated	16	14	Machined			
AT62-209-16141	Female Contact - Socket, Nickel-plated	16	14	Machined			
AT60-202-1631 Male Contact - Pin, Gold-plated		16	16-20	Machined			
AT62-201-1631	Female Contact - Socket, Gold-plated	16	16-20	Machined			
AT60-202-16141	Male Contact - Pin, Nickel-plated	16	16-20	Machined			
AT62-201-16141	Female Contact - Socket, Nickel-plated	16	16-20	Machined			
AT60-202-1631-22	Male Contact - Pin, Gold-plated	16	22-24	Machined			
AT62-201-1631-22	Female Contact - Socket, Gold-plated	16	22-24	Machined			
AT60-202-16141-22 Male Contact - Pin, Nickel-plated		16	22-24	Machined			
AT62-201-16141-22 Female Contact - Socket, Nickel-plated		16	22-24	Machined			

Tooling - Machined Contacts					
Part Number Description					
CA-5D12 Universal Hand Crimp Tool, Size 12/16/20 (Machined contacts only)		Universal Hand Crimp Tool, Size 12/16/20 (Machined contacts only)			
3	CA-5E12	Pneumatic Crimp Tool, Size 12/16/20 (Machined contacts only)			

Contact Removal Tools					
Part	Part Number	Description			
	ATRT-100	Used for removal of contacts for A Series™ products			
	AT11-310-1605	Contact Removal Tool, Plastic, Size 16			
	A114017	Sealing Plug, Size 16, White			

Stamped & Formed Contacts, Sockets & Pins							
Part Number	Description		AWG	Type			
AT60-14-0144	Male Contact - Pin, Gold-plated	16	14-16	Stamped & Formed			
AT62-14-0144	Female Contact - Socket, Gold-plated	16	14-16	Stamped & Formed			
AT60-14-0122	Male Contact - Pin, Nickel-plated	16	14-16	Stamped & Formed			
AT62-14-0122	Female Contact - Socket, Nickel-plated	16	14-16	Stamped & Formed			
AT60-16-0144	Male Contact - Pin, Gold-plated	16	16-18	Stamped & Formed			
AT62-16-0144	Female Contact - Socket, Gold-plated	16	16-18	Stamped & Formed			
AT60-16-0122	Male Contact - Pin, Nickel-plated	16	16-18	Stamped & Formed			
AT62-16-0122	Female Contact - Socket, Nickel-plated	16	16-18	Stamped & Formed			
AT60-16-0644	Male Contact - Pin, Gold-plated	16	18-20	Stamped & Formed			
AT62-16-0644	Female Contact - Socket, Gold-plated	16	18-20	Stamped & Formed			
AT60-16-0622	Male Contact - Pin, Nickel-plated	16	18-20	Stamped & Formed			
AT62-16-0622	Female Contact - Socket, Nickel-plated	16	18-20	Stamped & Formed			
AT60-16-0844	Male Contact - Pin, Gold-plated	16	20-22	Stamped & Formed			
AT62-16-0844	Female Contact - Socket, Gold-plated	16	20-22	Stamped & Formed			
AT60-16-0822	Male Contact - Pin, Nickel-plated	16	20-22	Stamped & Formed			
AT62-16-0822	Female Contact - Socket, Nickel-plated	16	20-22	Stamped & Formed			

Tooling - Stamped & Formed Contacts						
Part	Part Number Description					
	MFX-3950	Crimp Die - Size 16, 18-20AWG (S&F contacts only)				
	MFX-3953	Crimp Die - Size 16, 16-18AWG (S&F contacts only)				
	MFX-3975	Crimp Die - Size 16, 14-16AWG (S&F contacts only)				
	MFX-3990	Crimp Die - Size 16, 20-22AWG (S&F contacts only)				
	ATT-16-00	Hand Crimp Tool - Size 16, 14-16AWG (S&F contacts only)				
	ATT-16-01	Hand Crimp Tool - Size 16, 18-20AWG (S&F contacts only)				
	ATT-1612-03	Hand Crimp Tool - Size 16, 20-22AWG (S&F contacts only)				

Amphenol Sine Systems 44724 Morley Drive Clinton Township, MI 48036 USA www.amphenol-sine.com 09/2021

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol:

AT06-4S-SR01RED