4

LENGTH TABLE	
PART NUMBER	LENGTH (METERS)
ATHD04-1-12P-12G-M1	1 (3.28FT)
ATHD04-1-12P-12G-M2	2 (6.56FT)
ATHD04-1-12P-12G-M4	4 (13.12FT)
ATHD04-1-12P-12G-M5	5 (16.40FT)
ATHD04-1-12P-12G-M10	10 (32.80FT)
PLEASE CONTACT CSR FOR ADD	DITONAL AVAILABLE C

 $\square$ 

В

1. MATERIAL:

FOR 24 HOURS).

3.8 RoHS COMPLIANT

3.


А


ASE CONT	FACT CSR FOF	R ADDITONAL	AVAILABLE	OPTIONS









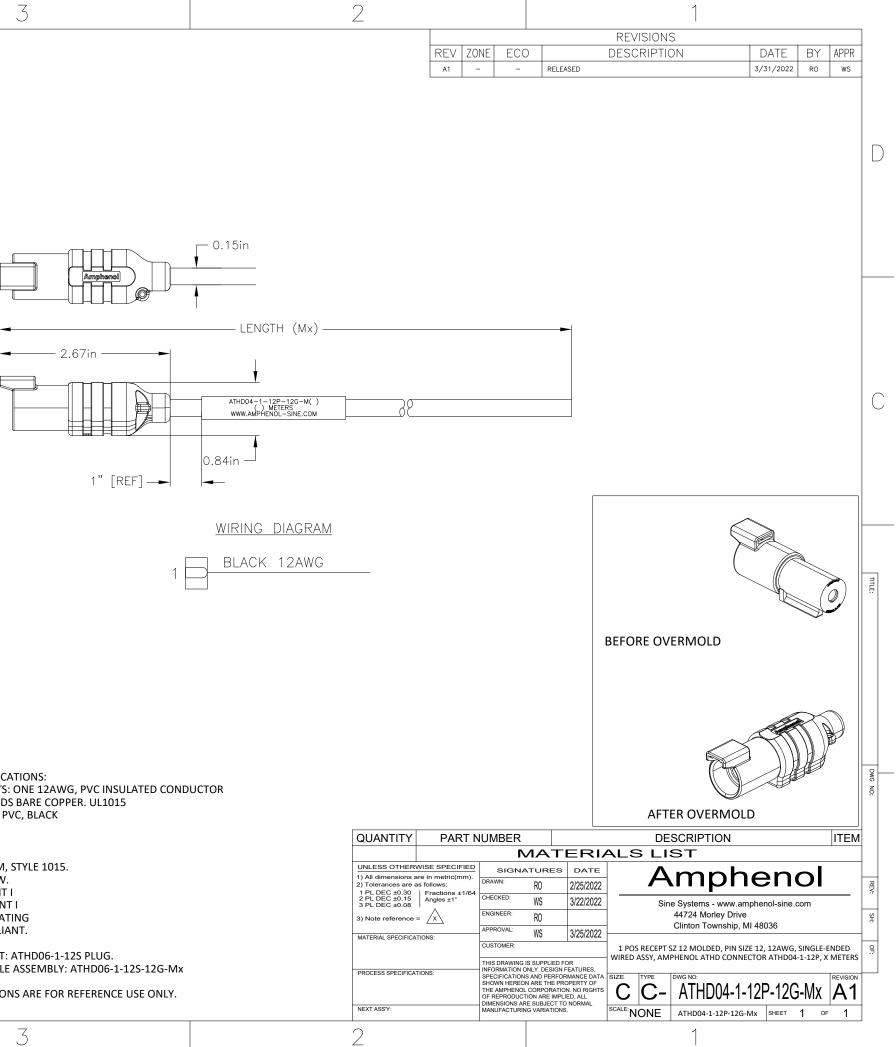



1	$\square$	BLACK	12AWG	
I				

- 4. WIRE SPECIFICATIONS: NOTES: UNLESS OTHERWISE SPECIFIED COMPONENTS: ONE 12AWG, PVC INSULATED CONDUCTOR 65x30 STRANDS BARE COPPER. UL1015 INSULATION: PVC, BLACK HOUSING: PA66 600V AC/DC SEAL: SILICONE RUBBER 5. APPROVALS: 2. MODIFICATIONS: OVERMOLDED (PA) UL TYPE AWM, STYLE 1015. CSA TYPE TEW. CONNECTOR SPECIFICATIONS: OIL RESISTANT I 3.1 CURRENT RATING: 30AMPS SUN RESISTANT I 3.2 CABLE ASSEMBLY OPERATING TEMPERATURE: -40 TO +100C FT1 FLAME RATING 3.3 CONTACT: COPPER ALLOY, NICKEL PLATED ROHS COMPLIANT. 3.4 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2
  - 6. MATING PART: ATHD06-1-12S PLUG. MATING CABLE ASSEMBLY: ATHD06-1-12S-12G-Mx
  - 7. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

QUANTITY	PART N	IUMBER		
		Г	MAT	ГЕ
UNLESS OTHER	WISE SPECIFIED	SIGN	ATURE	s
<ol> <li>All dimensions are in metric(mm).</li> <li>Tolerances are as follows:</li> </ol>	DRAWN:	RO	2	
2 PL DEC ±0.30 3 PL DEC ±0.15 3 PL DEC ±0.08		CHECKED:	WS	3
3) Note reference	= <u>x</u>	ENGINEER:	RO	
MATERIAL SPECIFICA	TIONS:	APPROVAL:	WS	3
		CUSTOMER:		
PROCESS SPECIFICA	TIONS:	THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY. DESIGN FEA SPECIFICATIONS AND PERFORM SHOWN HEREON ARE THE PROPI THE AMPHENOL CORPORATION. I OF REPRODUCTION ARE IMPLIED DIMENSIONS ARE SUBJECT TO N		
NEXT ASS'Y:		MANUFACTURI	NG VARIATIO	ONS.

4

3.7 MATING CYCLE DURABILITY: 100 CYCLES

MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.

3.5 INSULATION RESISTANCE: 1000 MEGAOHMS MIN @ 25C

3.6 MOISTURE RESISTANCE: IP68 MATED CONDITION (1M OF WATER

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol: ATHD04-1-12P-12G-M10