


-31.9±1.0 Ø11.1±1.0 CABLE JACKET AREA

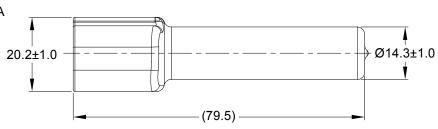

PART NUMBER CHART						
COLOR	PART NUMBER					
GREY	ATM12P-BT					
BLACK	ATM12P-BT-BK					
YELLOW	ATM12P-BT-YW					

NOTES: UNLESS OTHERWISE SPECIFIED

1. THIS PART IS USED ON ATM04-12P RECEPTACLE ANY MODIFICTION DOES NOT INCLUDE AN END CAP.

2. TEMPERATURE RATING : -29°C TO +100°C [-20°F TO +212°F]

3. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

	SEE PART NUMBER CHART			REF: DTM12P-BT, DTM12P-BT-BK, DTM12P-BT-YW							
	PART NUMBER			DESCRIPTION					ITEM		
QUANTITY MATERIALS LIST											
UNLESS OTHERWISE SPECIFIED 1) All dimensions are in metric(mm).		SIGNATURES		DATE	Amphenol						
2) Tolerances are a		DRAWN: B	ROOK.DING	13MAR20			ипри	31101			
2 PL DEC ±0.15 3 PL DEC ±0.08	Angles ±1°	CHECKED:	ORION.LI	16MAR20	Sine Systems - www.amphenol-sine.com						
3) Note reference	- 🗴	ENGINEER:			44724 Morley Drive						
MATERIAL SPECIFICA	TIONS:	APPROVAL:	OMMY.XIE	17MAR20			Clinton Township, MI 4	18036			
PVC THIS DRAWING IS SUPPLI PROCESS SPECIFICATIONS:		CUSTOMER:			BOOT ,ATM ,12 WAY,RECEPTACLE						
		ONLY. DESIGN	D FOR GN FEATURES,								
SPECIFICATIONS AND PERFORMANCE DATA SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAI		A	C-	ATM12P	-BT-XX	A1					
NEXT ASS'Y: MANUFACTURING VARIATIONS.			SCALE: N	ONE		SHEET 1 C	F 1				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol:

ATM12P-BT