
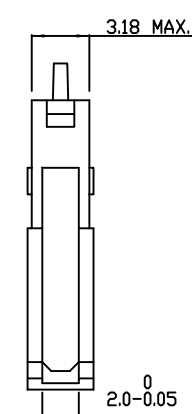
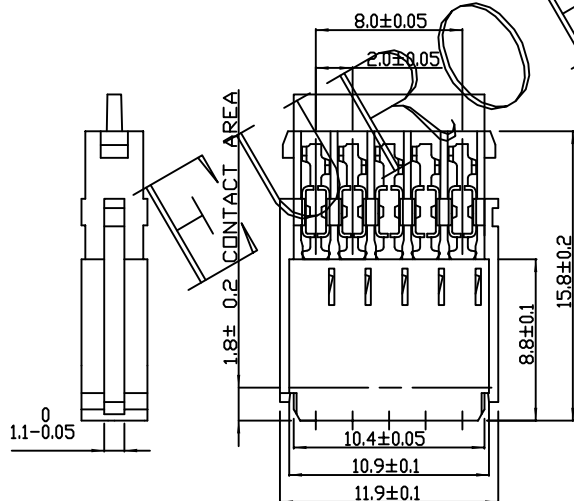
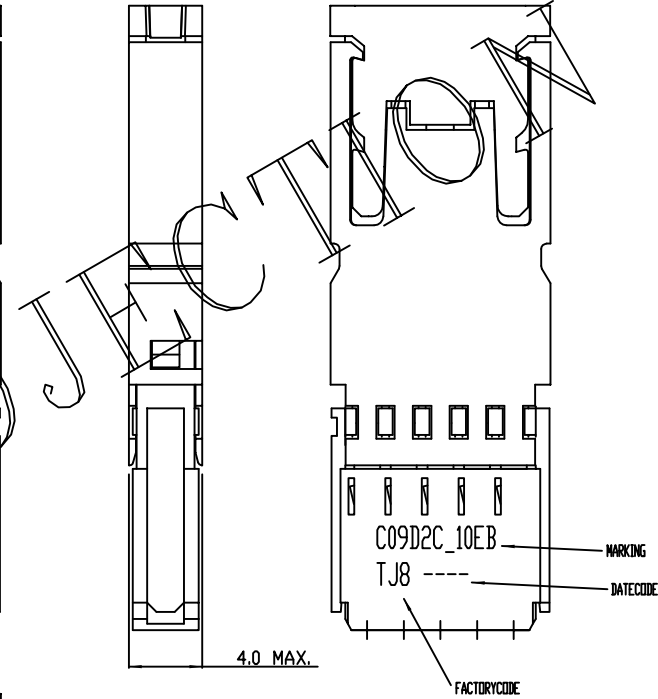
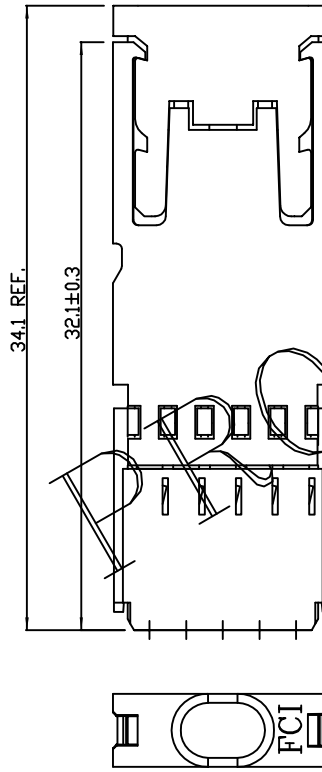
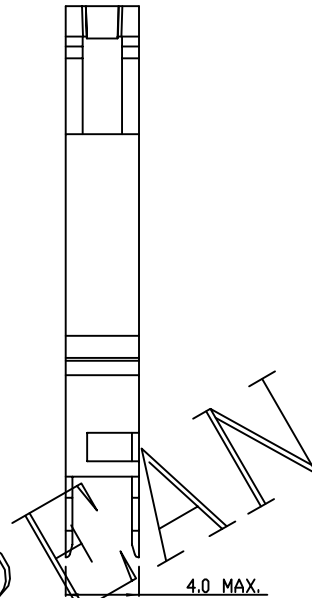
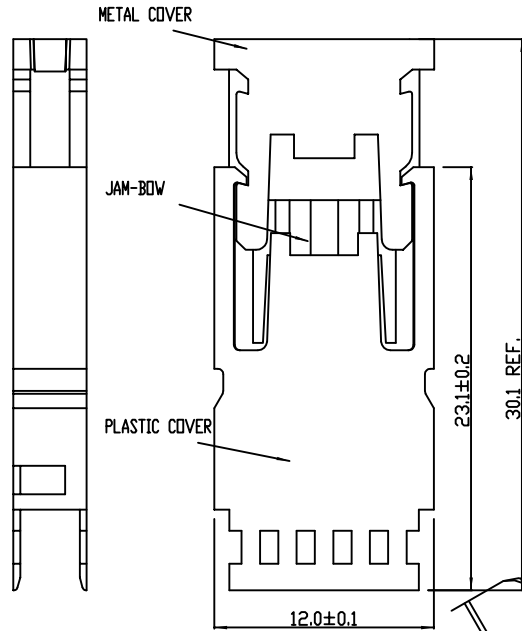



GEN. ST.	01	02	03	04	05	06	07	08	0D	50	60	70	80	90																	
INT. ST.	10	11	12	13	14	18	20	31	32	33	34	38	39	40	42	43	44	45	46	48	56	70	72	73	75	76	81	82	83	84	88

REV.	DATE	DESCRIPTION	BY	C'K'D'
A	03-09-84	CONVERSION REVISION 04	EN	
B	05-11-85	0205-4059	DL	
04	20/08/00	FACTORYCODE "TJ8" ADDED K.V.		

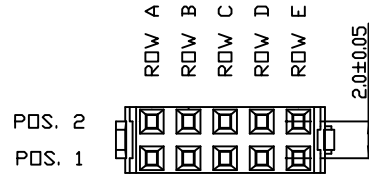

PERFORMANCE CHARACTERISTICS:

- VOLTAGE RATING : 250 VAC.
- CURRENT RATING : 1.0 A AT 70°C.
- INSULATION RESISTANCE : 10⁹ MO MIN.AFTER TEST.
- DIELECTRIC WITHSTANDING VOLTAGE : 1000 V.
- CONTACT RESISTANCE : 20 mΩ MAX. AFTER TEST.
- OPERATING T° : -55°C TO +125°C.
- INSERTION FORCE : 0.75 N MAX. PER CONTACT.
- WITHDRAWAL FORCE : 0.20 N MIN. PER CONTACT.

NOTES:

- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- THE PRODUCT IS NOT INTENDED TO BE EXPOSED TO A MANUFACTURING SOLDER PROCESS.

MATERIALS:

- TERMINAL BLOCK : GLASS REINFORCED THERMOPLASTIC UL94-V0.
- PLASTIC COVER : NYLON
- METAL COVER : ZAMAK 5
- JAM-BOW : INOX
- CONTACTS : PHOSPHOR BRONZE.
- PLATING : EB : 2.00 Y AU MIN. OVER NI IN CONTACT AREA; PURE SN ON IDC-TERMINAL.

WIRE CHARACTERISTICS:

- INSULATION DIAMETER 1.03 MM MAX.

PART NUMBER:

- HM1C09D2C010EBLF CONNECTOR FOR CABLE TEL 241 CLIP 0.5 MM
- HM1C09D2C110EBLF CONNECTOR FOR CABLE TEL 301 CLIP 0.3 MM

PART NUMBER:

- HM1C09D2C010EBLF MARKING: C09D2C010EB
- HM1C09D2C110EBLF MARKING: C09D2C110EB

1DEC ±0,2 1DEC 2DEC ±0,1 2DEC ANGLES ±1° HOEKEN	APPR. DATE -1-11 DRAFT CHECKED 08-07-97 R.Verbeek	10 POS. HMI LF STACK. CABLE CONN. WITH COVER AT. N. HM1C09D2C_10EBLF	SCALE
WE RESERVE THE RIGHT TO CHANGE DIMENSIONS OR REQUIREMENTS WITHOUT PRIOR NOTICE.	PROD. MGR. PR.ENG.MGR. PR.MGT.MGR.	FCI MEHELEN N.V. A SPINGSTRAT 8, 2800 MEHELEN	
ALL DIMENSIONS IN MM	REFEREN S / REFERENTIE	BS,D ,202355,002 B	

THIS IS OUR EXCLUSIVE PROPERTY. IT IS NOT TO BE COPIED, REPRODUCED, OR DISCLOSED TO A THIRD PARTY, AND MUST BE DESTROYED IMMEDIATELY UPON THE USER'S REQUEST. THE USER SHALL BE RESPONSIBLE FOR THE PROTECTION OF THIS DOCUMENT. THE USER SHALL BE RESPONSIBLE FOR THE PROTECTION OF THIS DOCUMENT.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[HM1C09D2C110EBLF](#)