

REV

ECO

DESCRIPTION

DATE

ВҮ

APPR

REVISIONS

## CONTACT ORIENTATION ON ROLL(3000PCS/COIL)

**NOTES: (UNLESS OTHERWISE SPECIFIED)** 

1.2. OUTER SPRING: STAINLESS STEEL 1.1. CONTACT BODY: COPPER ALLOY.

2. SPECIFICATIONS: 2.2 TERMINATION TYPE : CRIMPING. 2.1 CURRENT RATING: 13A MAX.

2.4 WIRE INSULATION DIA(MAX): \$2.5mm.

2.3 WIRE RANGE : 20~22AWG.

4. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY. 3. RoHS COMPLIANT.

5. AVAILABLE TOOLS:

5.1 HAND CRIMPER: MFX-3954.
5.2 CRIMP APPLICATOR: MFX-3957. 5.3 EXTRACTION TOOL : QXRT16.

$30\mu$ "GOLD PLATING OVER NICKEL.	SS20M2G30
15μ"GOLD PLATING OVER NICKEL.	SS20M2G15
10μ"GOLD PLATING OVER NICKEL.	SS20M2G10
5μ"GOLD PLATING OVER NICKEL.	SS20M2G5
GOLD FLASH PLATING OVER NICKEL.	SS20M2F
NICKEL PLATING OVER COPPERIZE.	SS20M2N
TIN PLATING OVER NICKEL.	SS20M2T
CONTACT PLATING(MATING AREA)	P/N

QUANTITY

PART NUMBER

MATERIALS LIST

DESCRIPTION

TEM

Jul-16-18

Sine Systems - www.amphenol-sine.com 44724 Morley Drive Clinton Township, MI 48036

Amphenol

ѿЁ


SS20M2XX


 $\overline{\geq}$ 

SHEET

ECO-MATE, SOCKET CONTACT, STAMPED, 22-20AWG, SIZE 16

NONE 0



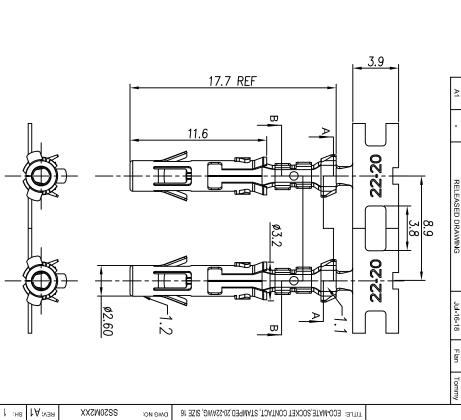

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol: SS20M2T