


Aug.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

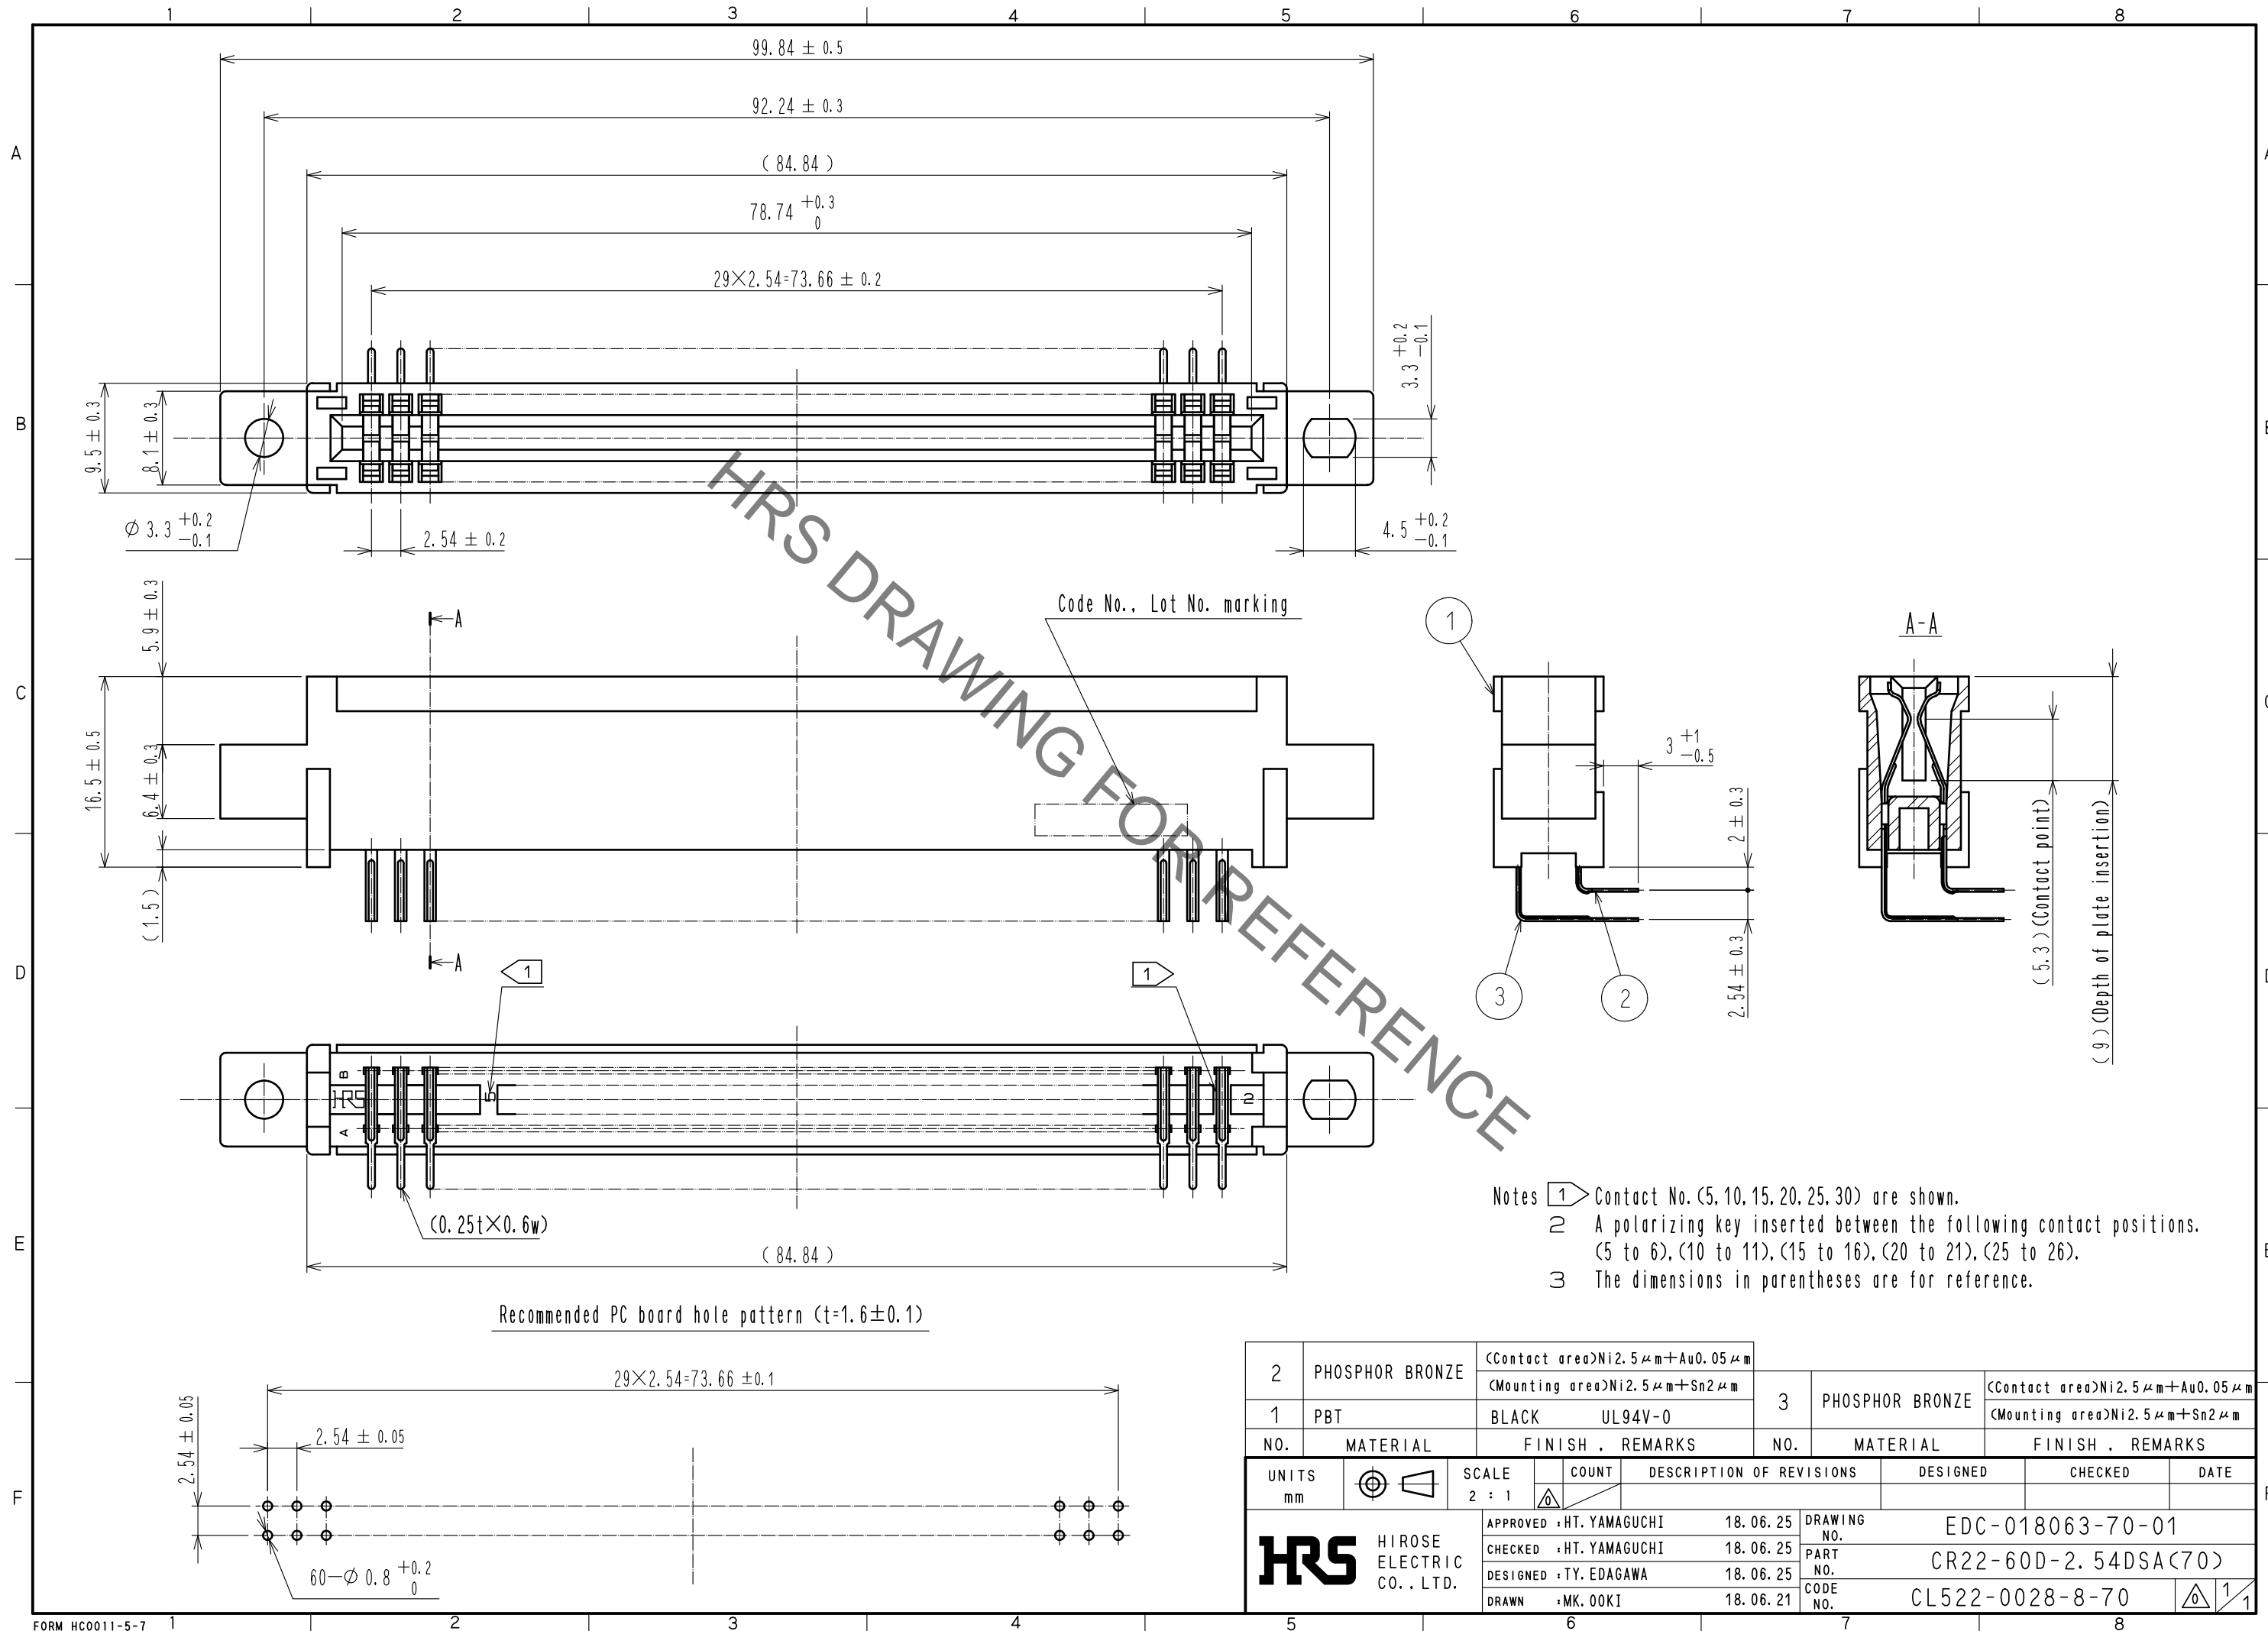

- Notes
- 1 Contact No. (5, 10, 15, 20, 25, 30) are shown.
 - 2 A polarizing key inserted between the following contact positions (5 to 6), (10 to 11), (15 to 16), (20 to 21), (25 to 26).
 - 3 The dimensions in parentheses are for reference.

Recommended PC board hole pattern (t=1.6±0.1)

2	PHOSPHOR BRONZE	(Contact area)Ni2.5µm+Au0.05µm (Mounting area)Ni2.5µm+Sn2µm	3	PHOSPHOR BRONZE	(Contact area)Ni2.5µm+Au0.05µm (Mounting area)Ni2.5µm+Sn2µm
1	PBT	BLACK UL94V-0			
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT	DESCRIPTION OF REVISIONS	
DESIGNED		CHECKED		DATE	
APPROVED : HT. YAMAGUCHI		18.06.25		DRAWING NO. EDC-018063-70-01	
CHECKED : HT. YAMAGUCHI		18.06.25		PART NO. CR22-60D-2.54DSA(70)	
DESIGNED : TY. EDAGAWA		18.06.25		CODE NO. CL522-0028-8-70	
DRAWN : MK. OKI		18.06.21		1/1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[CR22-60D-2.54DSA\(70\)](#)