


Sep.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

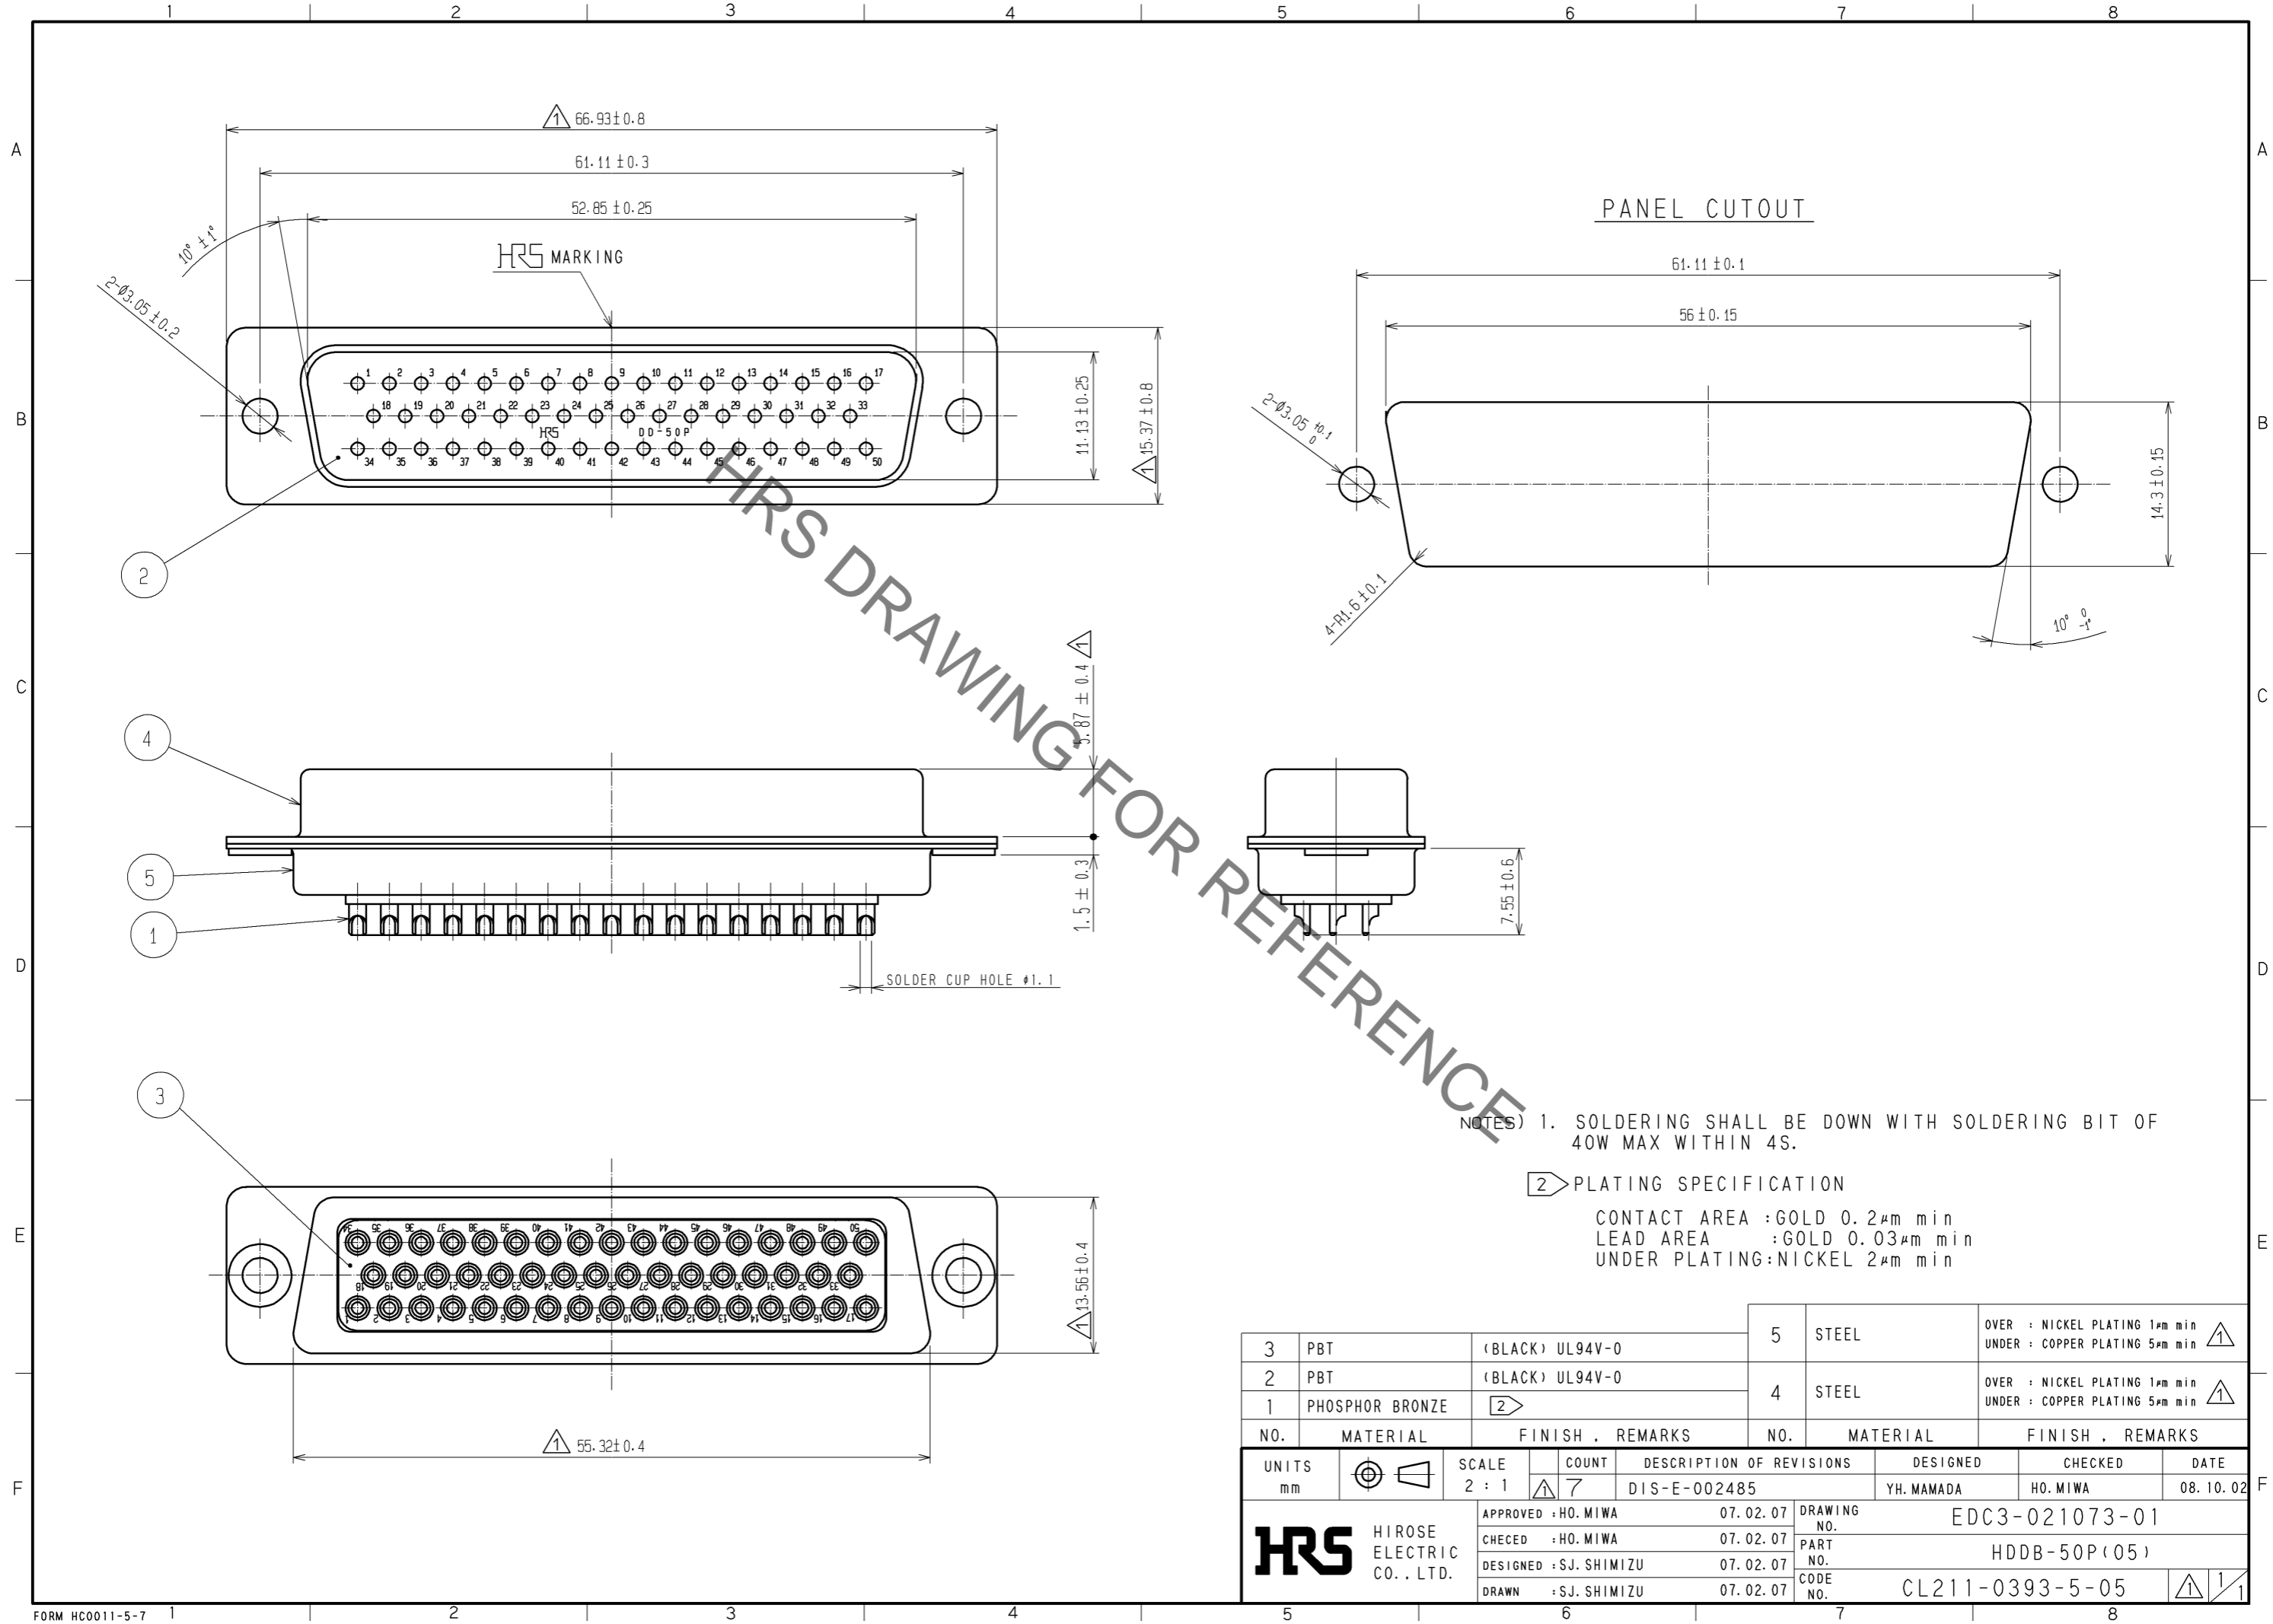

NOTES) 1. SOLDERING SHALL BE DOWN WITH SOLDERING BIT OF 40W MAX WITHIN 4S.
 2. PLATING SPECIFICATION
 CONTACT AREA : GOLD 0.2μm min
 LEAD AREA : GOLD 0.03μm min
 UNDER PLATING : NICKEL 2μm min

NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
3	PBT	(BLACK) UL94V-0	5	STEEL	OVER : NICKEL PLATING 1μm min UNDER : COPPER PLATING 5μm min
2	PBT	(BLACK) UL94V-0	4	STEEL	OVER : NICKEL PLATING 1μm min UNDER : COPPER PLATING 5μm min
1	PHOSPHOR BRONZE				

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	7	DIS-E-002485	YH.MAMADA	HO.MIWA	08.10.02

APPROVED : HO.MIWA	07.02.07	DRAWING NO.	EDC3-021073-01
CHECED : HO.MIWA	07.02.07	PART NO.	HDDB-50P(05)
DESIGNED : SJ.SHIMIZU	07.02.07	CODE NO.	CL211-0393-5-05
DRAWN : SJ.SHIMIZU	07.02.07		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[HDDB-50P\(05\)](#)