

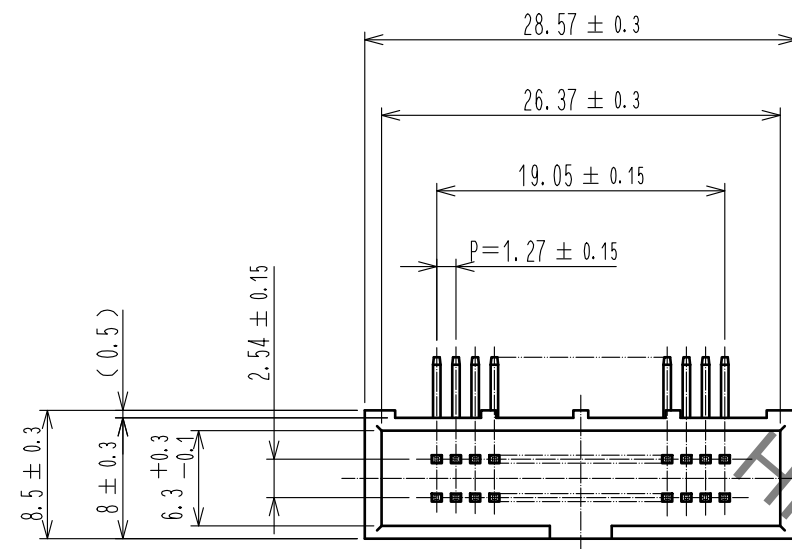




Jan.1.2022 Copyright 2022 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

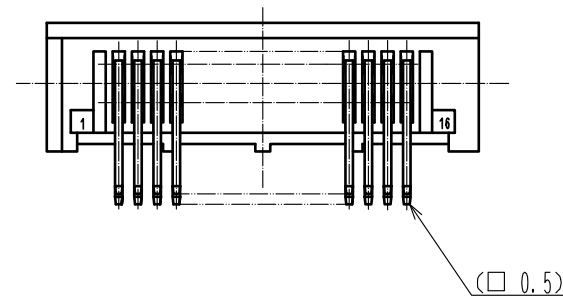

Lot No. Marking

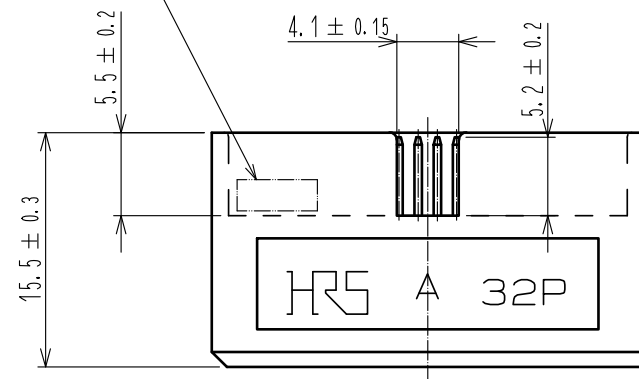


Recommended PC board hole pattern (mounting side)

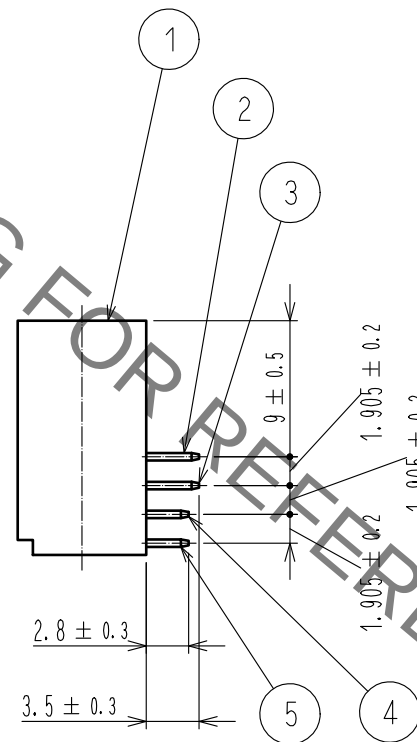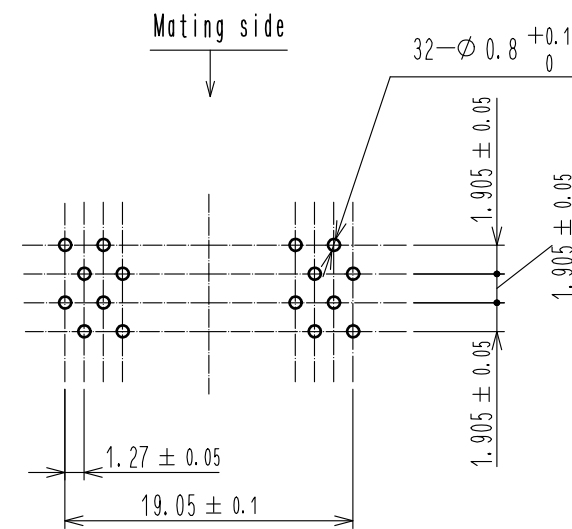

Notes 1 The dimensions in parentheses are for reference.

3	BRASS	Contact area : Gold 0.2μm min	5	BRASS	Contact area : Gold 0.2μm min
		Dip area : TIN-Plating 2μm min			Dip area : TIN-Plating 2μm min
		Under plating : Nickel 2.5μm min			Under plating : Nickel 2.5μm min
2	BRASS	Contact area : Gold 0.2μm min	4	BRASS	Contact area : Gold 0.2μm min
		Dip area : TIN-Plating 2μm min			Dip area : TIN-Plating 2μm min
		Under plating : Nickel 2.5μm min			Under plating : Nickel 2.5μm min
1	PBT	BLACK UL94V-0			
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS

UNITS mm		SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED : HT. YAMAGUCHI		18.06.25	DRAWING NO.	EDC-019050-71-21		
		CHECKED : HT. YAMAGUCHI		18.06.25	PART NO.	HIF6A-32PA-1.27DS(71)		
		DESIGNED : TY. EDAGAWA		18.06.25	CODE NO.	CL631-0203-5-71		
		DRAWN : MK. OKI		18.06.21	 1/1			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[HIF6A-32PA-1.27DS\(71\)](#)