
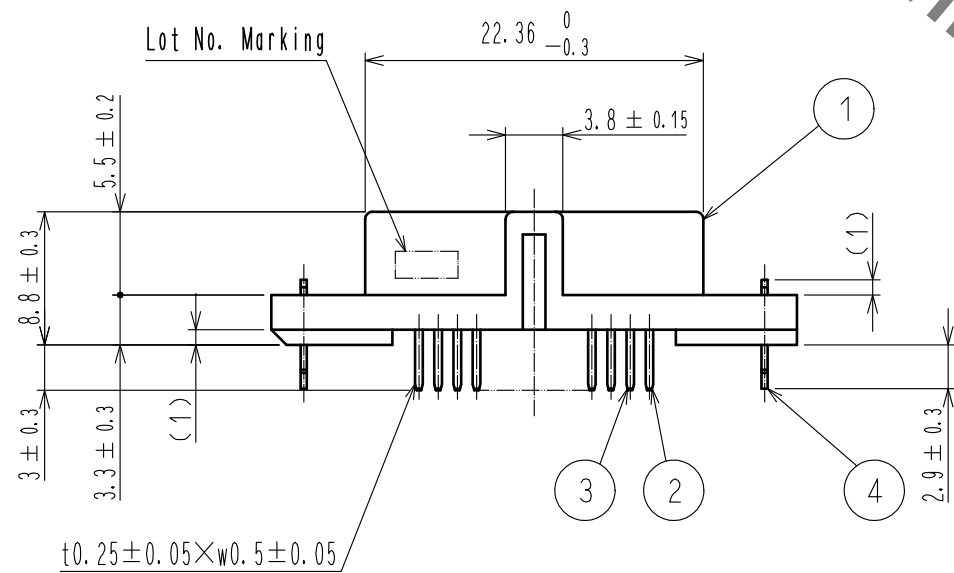
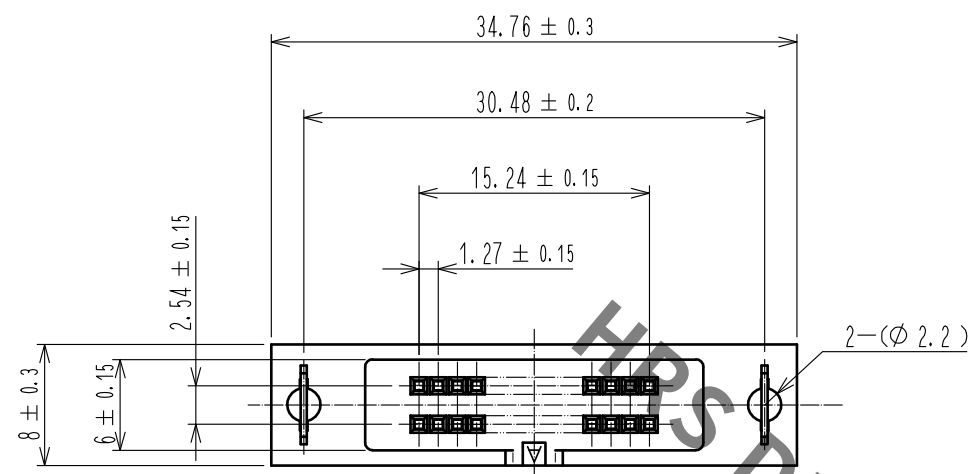
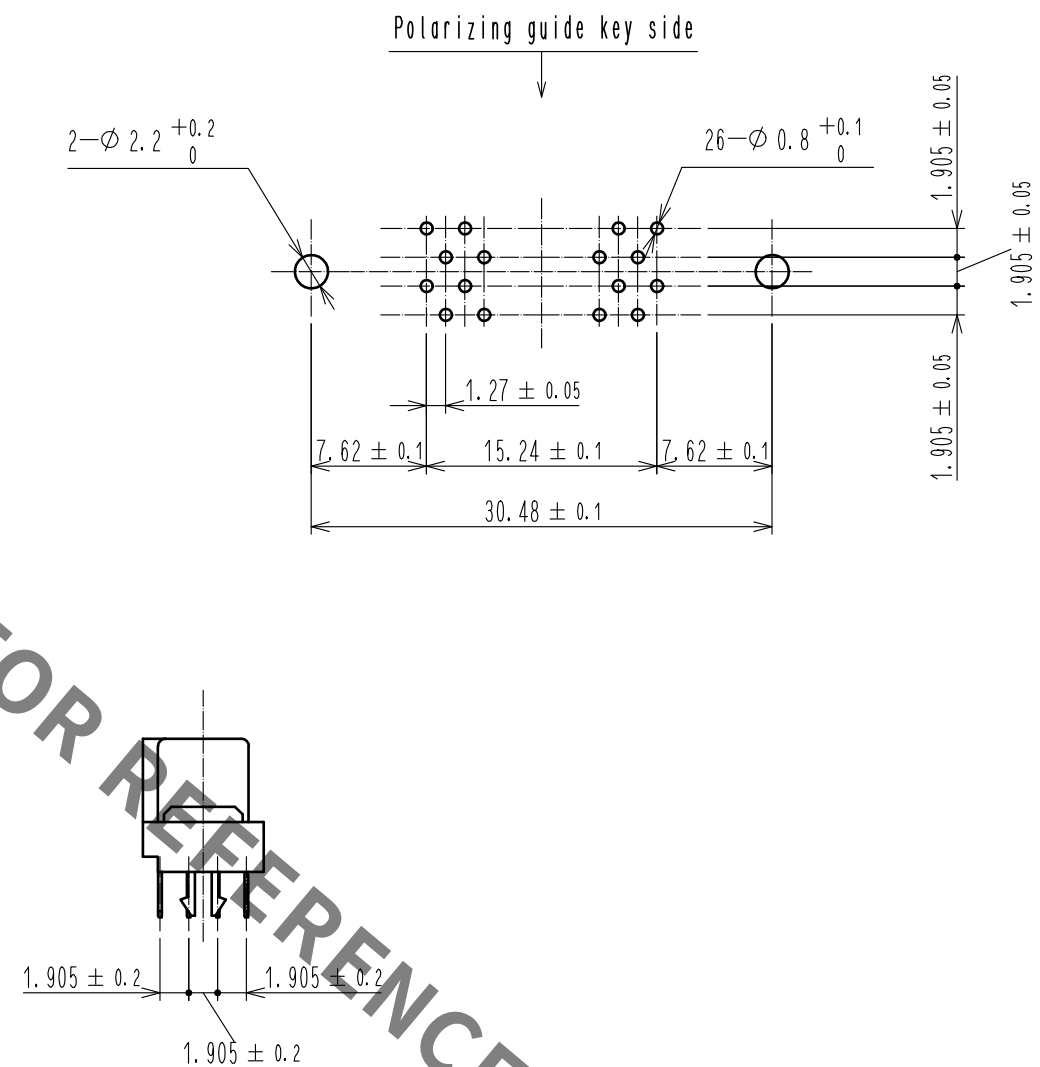


Recommended PC board hole pattern (mounting side)



Notes 1 The dimensions in parentheses are for reference.

2	COPPER ALLOY	Contact area : Gold 0.2μm min		4	PHOSPHOR BRONZE	Tin-Plating					
		Dip area : TIN-Plating 2μm min		3	COPPER ALLOY	Contact area : Gold 0.2μm min					
		Under plating : Nickel 2.5μm min				Dip area : TIN-Plating 2μm min					
1	PBT	BLACK UL94V-0				Under plating : Nickel 2.5μm min					
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS					
UNITS mm				SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED : HT. YAMAGUCHI		18.06.25		DRAWING NO.		EDC-019318-71-21			
		CHECKED : HT. YAMAGUCHI		18.06.25		PART NO.		HIF6B-26DA-1.27DSAL(71)			
		DESIGNED : TY. EDAGAWA		18.06.25		CODE NO.		CL631-0452-0-71			
		DRAWN : MK. OKI		18.06.21							
											

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[HIF6B-26DA-1.27DSAL\(71\)](#)