


Sep.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

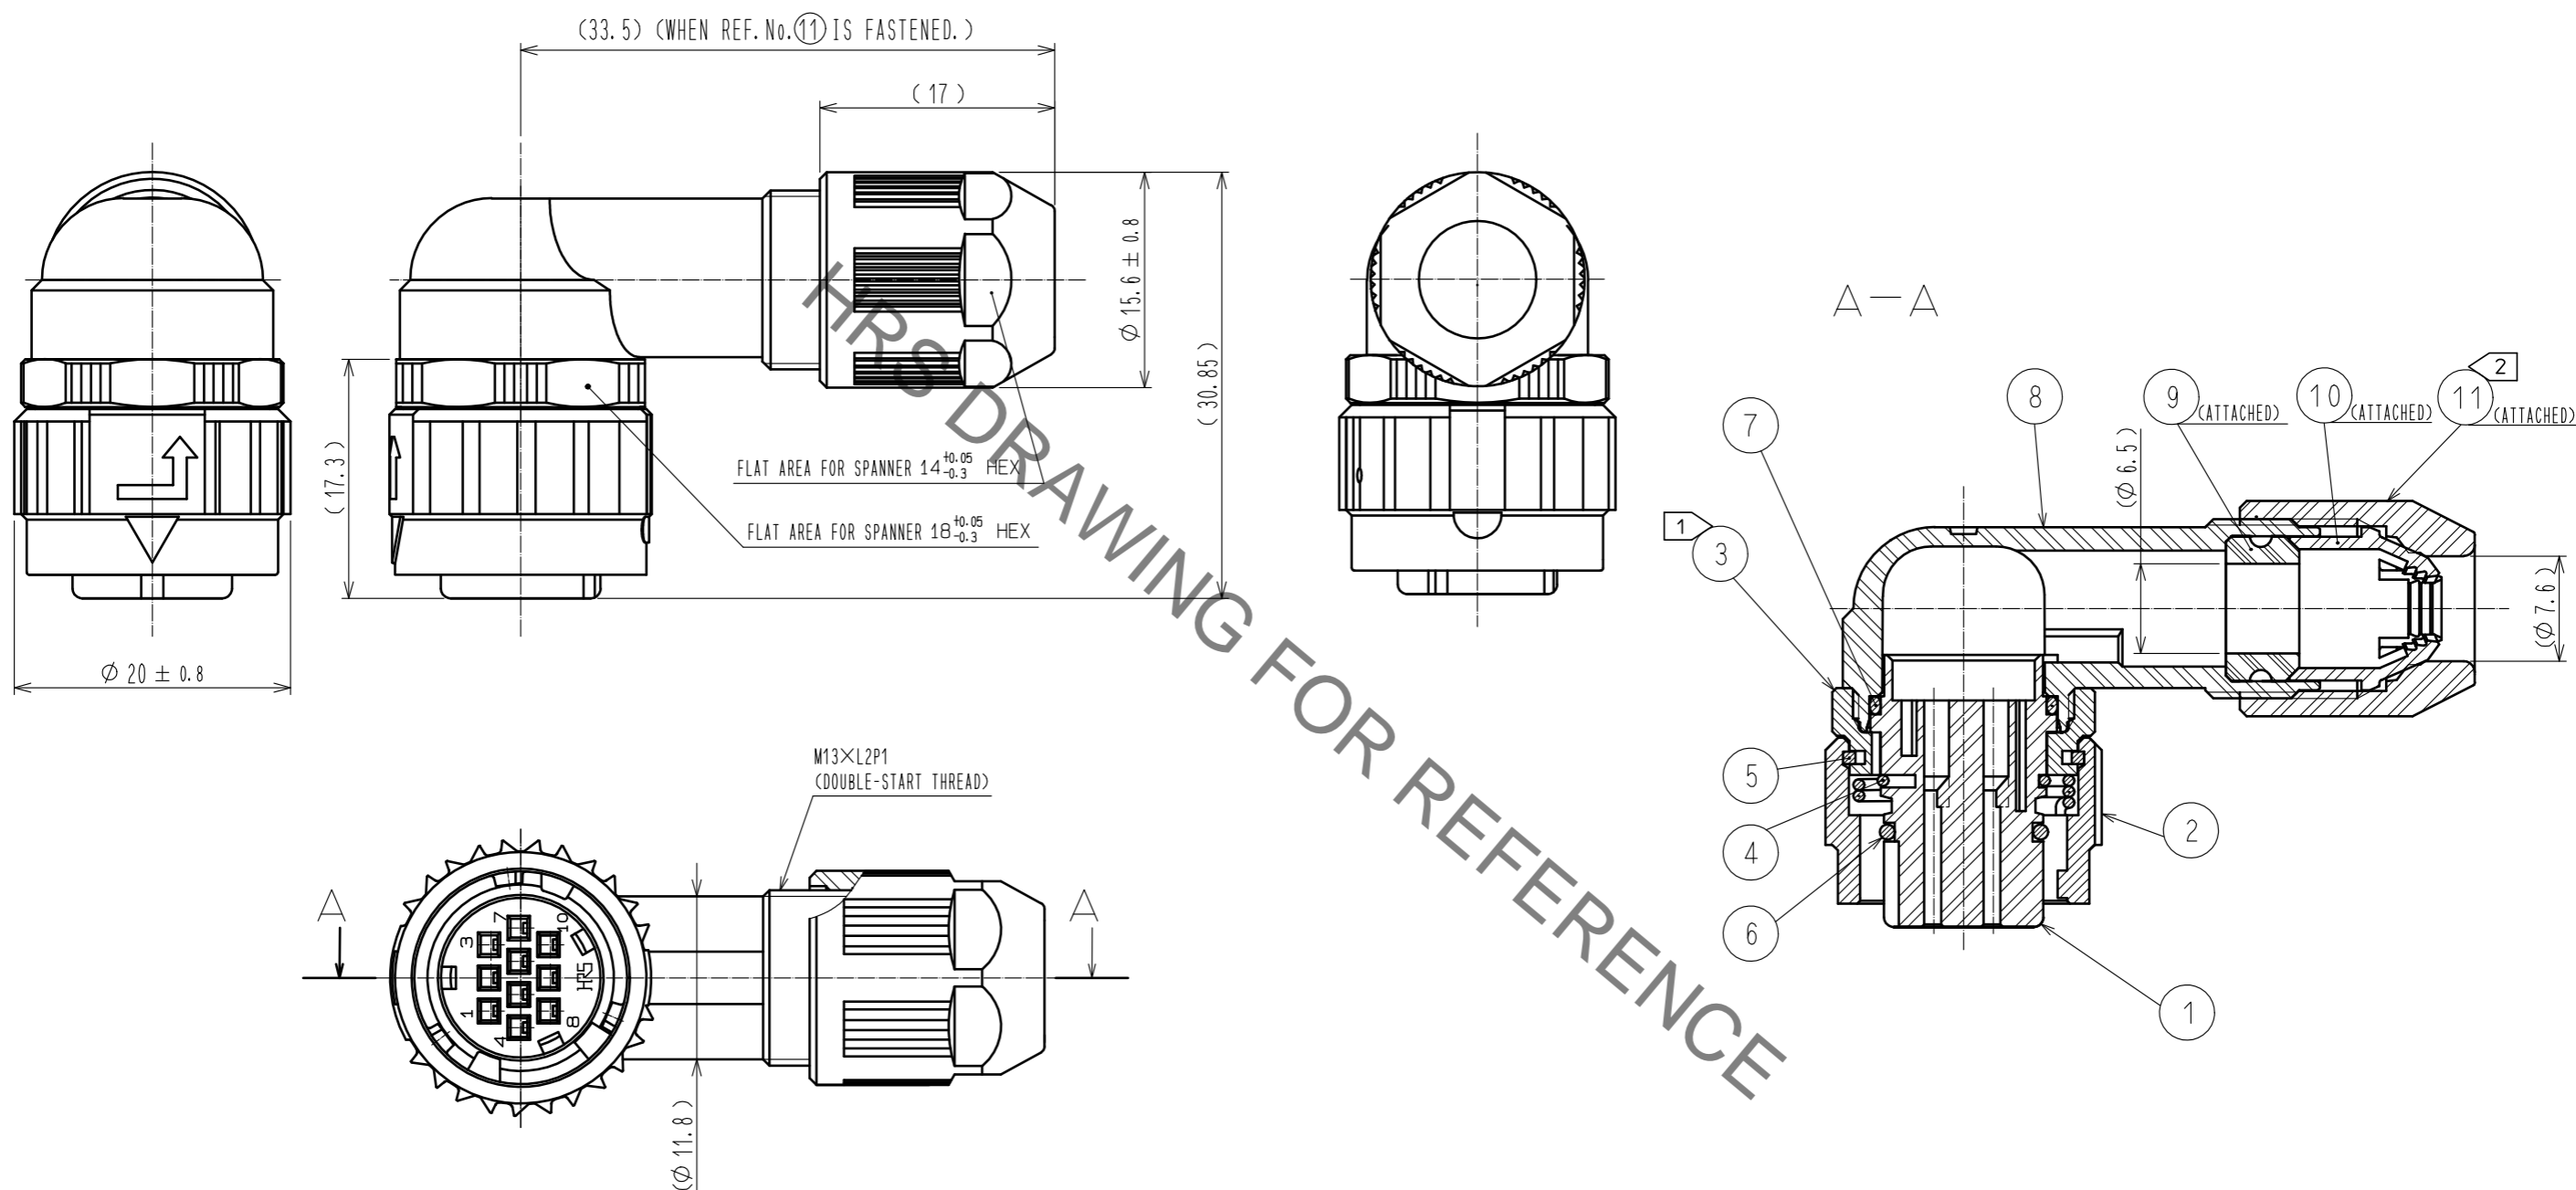

- NOTES
- ① THE RECOMMENDED TIGHTENING TORQUE OF REF. NO. ③: 0.9 TO 1 N·m.
THE RECOMMENDED ADHESIVE OF REF. NO. ③: LOCTITE 243 AND LOCK PRIMER 7649 MADE BY HENKEL JAPAN LTD.
 - ② THE RECOMMENDED TIGHTENING TORQUE OF REF. NO. ⑪: 0.9 TO 1 N·m.
THE RECOMMENDED ADHESIVE AND PRIMER OF REF. NO. ⑪: LOCTITE 243 AND LOCK PRIMER 7649 MADE BY HENKEL JAPAN LTD.
 - 3 ROTATION EXAMPLE ARE SHOWN FOR REF. NO. ①, ③, ⑧, AND ⑪.
 - 4 APPLICABLE CRIMP CONTACT: HR34B-SC1-211(CL134-0050-4)
APPLICABLE WIRE: AWG#20 TO AWG#24(COVERED WIRE MAX. OUTSIDE DIA. $\phi 1.7$)
APPLICABLE CONTACT REMOVAL TOOL(EXTRACTION TOOL): RP6-SC-TP(CL150-0039-0)
 - 5 THE CABLE PULL AND TWISTING STRENGTH AND OTHER CHARACTERISTICS MAY DIFER, DEPENDING ON THE CABLE STRUCTURE.
PLEASE CONFIRM BEFORE THE USE.

6	ACRYLONITRILE BUTADIENE RUBBER (BLACK)									
5	PHOSPHOR BRONZE NICKEL PLATING	11	POLYPHENYLENE SULFIDE (BLACK)	UL94V-0						
4	STAINLESS STEEL	10	POLYAMIDE (WHITE)	UL94V-0						
3	ZINC ALLOY NICKEL PLATING	9	HYDROGENATION ACRYLONITRILE BUTADIENE RUBBER (BLACK)							
2	ZINC ALLOY NICKEL PLATING	8	POLYAMIDE (BLACK)	UL94V-0						
1	POLYPHENYLENE SULFIDE (BLACK)	7	ACRYLONITRILE BUTADIENE RUBBER (BLACK)							
NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS			
UNITS			SCALE	COUNT	DESCRIPTION OF REVISIONS			DESIGNED	CHECKED	DATE
mm			2 : 1		APPROVED	HY. KOBAYASHI	18.02.26	DRAWING NO.	EDC-117754-31-00	
					CHECKED	HY. KOBAYASHI	18.02.26	PART NO.	HR08D-12WLPM-10SC(31)	
					DESIGNED	DS. MATSUNE	18.02.24	CODE NO.	CL108-0270-4-31	
					DRAWN	AI. NISHIYAMA	18.02.16			1/1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[HR08D-12WLPM-10SC\(31\)](#)