



Aug. 1. 2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

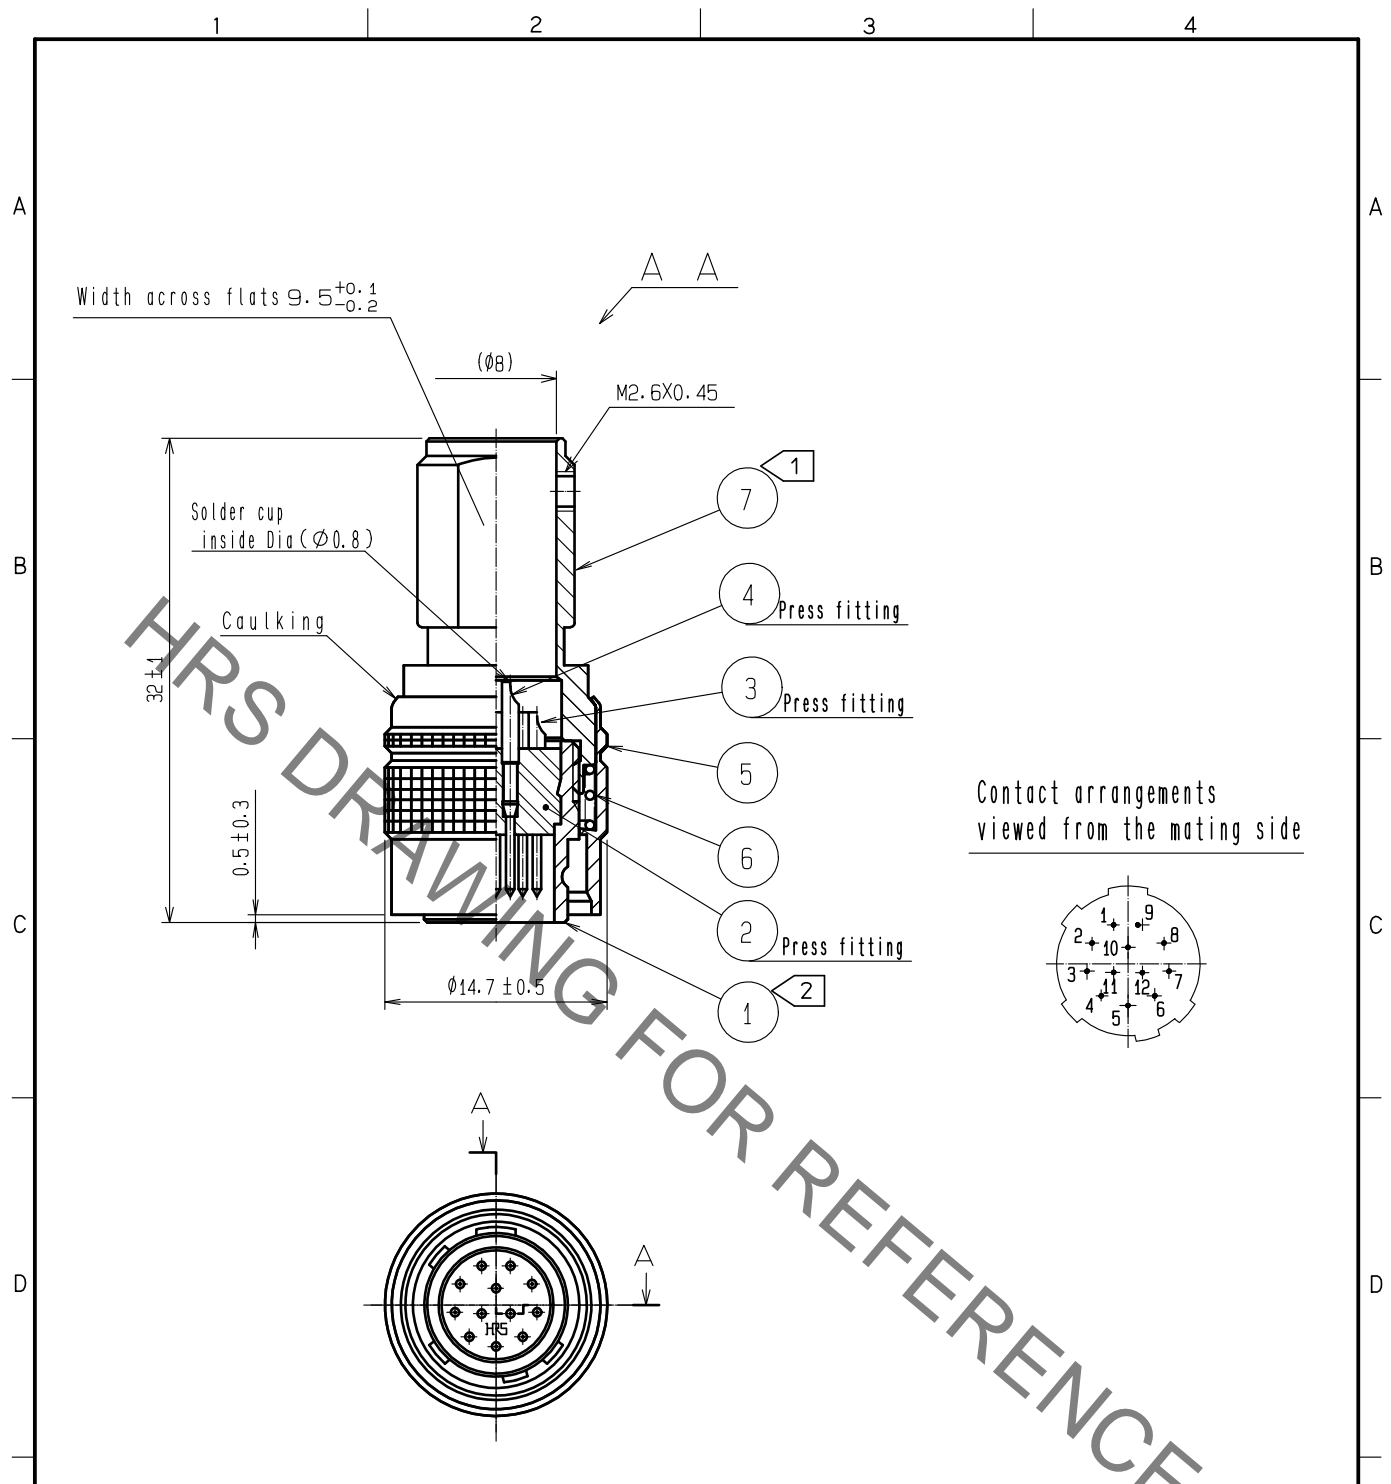

Contact arrangements viewed from the mating side



- Notes
- ① The recommended tightening torque, REF. NO. ⑦: 2 to 2.5 N·m.
 - ② LOCTITE 243, HENKEL JAPAN or equivalent is recommended to prevent REF. NO. ① for loosening.
 - ③ One example of the rotation of REF. NO. ⑦ to REF. NO. ① is shown.

4	Brass	Gold plating 0.2μ min.					
3	Brass	Nickel under plating 2μ min.	7	Brass	Nickel plating		
2	Polyamide	(Black) UL94V-0	6	Steel	Nickel plating		
1	Zinc alloy	Matte finish nickel plated	5	Brass	Black Chromate Treatment (Trivalent Chrome)		
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS		
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HIROSE ELECTRIC CO., LTD.		APPROVED : EJ. KUNII	15. 09. 29	DRAWING NO.	EDC-010386-78-78		
		CHECKED : EJ. KUNII	15. 09. 29	PART NO.	HR10A-10P-12P<78>		
		DESIGNED : TP. KOMATSU	15. 09. 29	CODE NO.	CL110-0401-7-78		
		DRAWN : TP. KOMATSU	15. 09. 29				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[HR10A-10P-12P\(78\)](#)