


Sep.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

1		2			3			4		
COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	

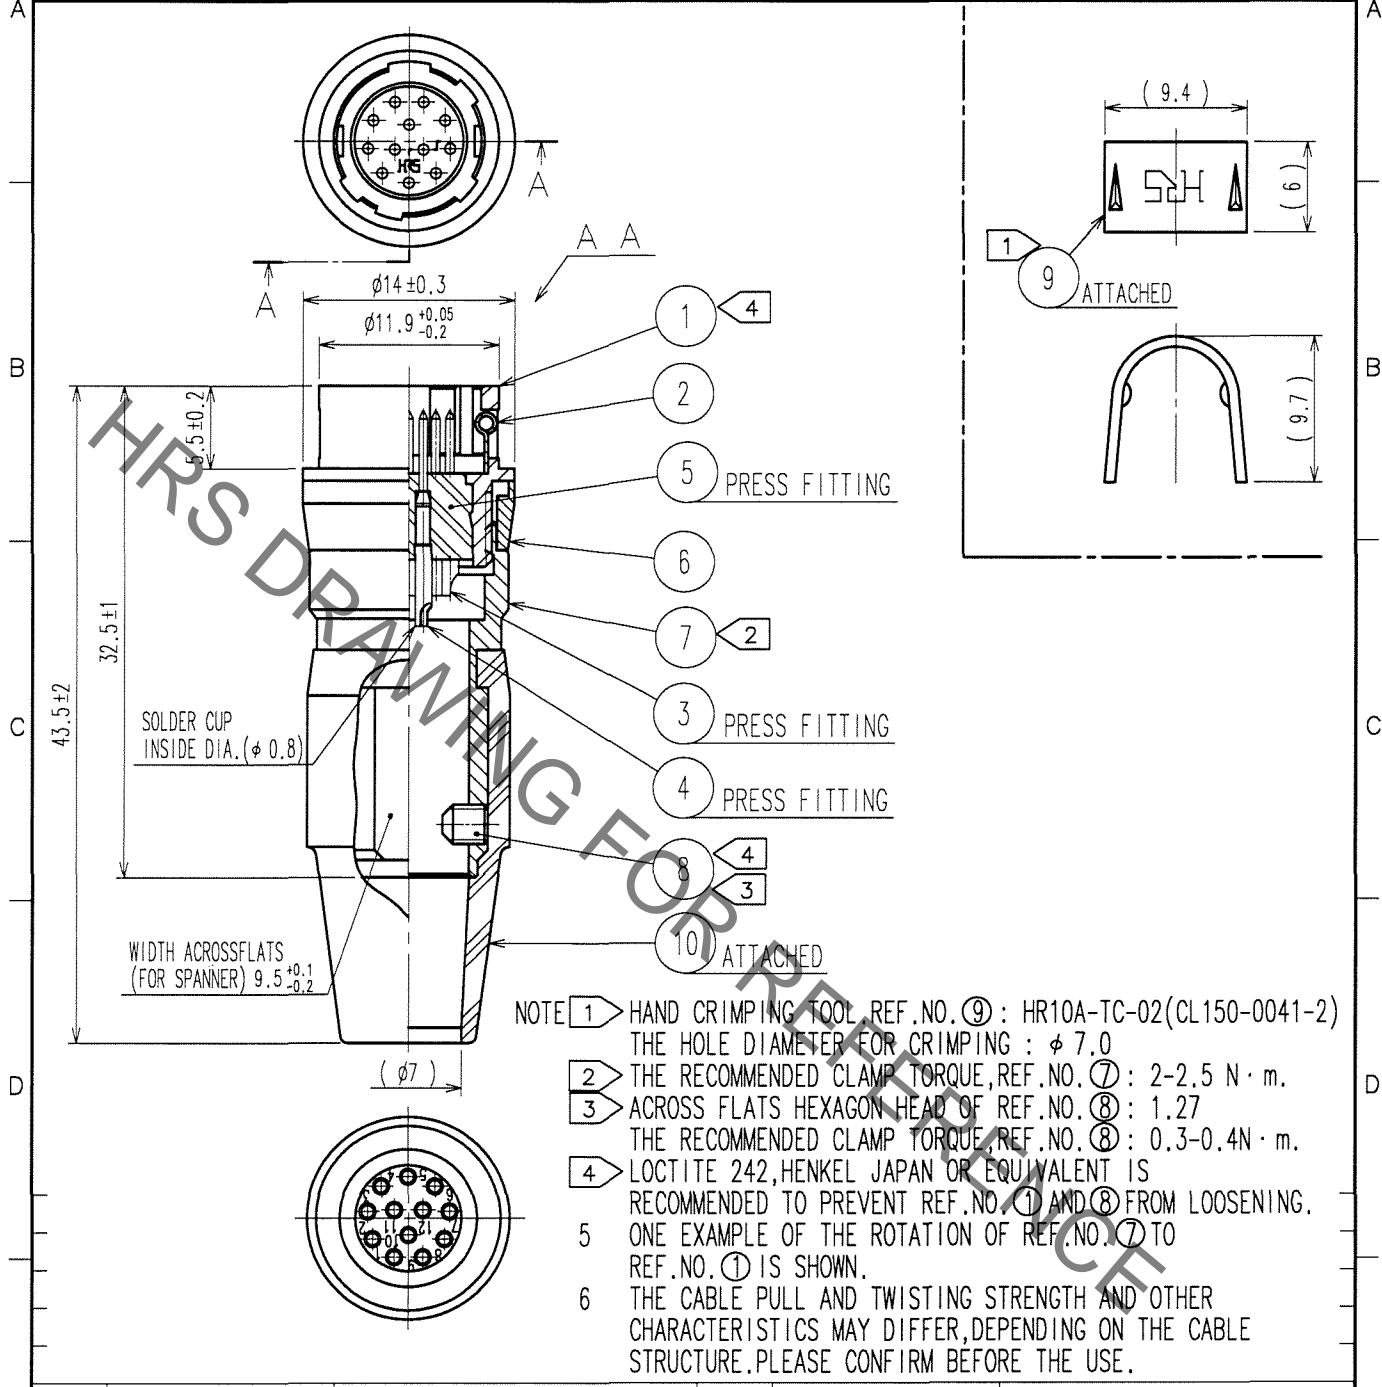

NOTE ① HAND CRIMPING TOOL REF.NO. ⑨ : HR10A-TC-02(CL150-0041-2)  
 THE HOLE DIAMETER FOR CRIMPING :  $\phi 7.0$   
 ② THE RECOMMENDED CLAMP TORQUE, REF.NO. ⑦ : 2-2.5 N·m.  
 ③ ACROSS FLATS HEXAGON HEAD OF REF.NO. ⑧ : 1.27  
 THE RECOMMENDED CLAMP TORQUE, REF.NO. ⑧ : 0.3-0.4N·m.  
 ④ LOCTITE 242, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT REF.NO. ① AND ⑧ FROM LOOSENING.  
 ONE EXAMPLE OF THE ROTATION OF REF.NO. ⑦ TO REF.NO. ① IS SHOWN.  
 ⑥ THE CABLE PULL AND TWISTING STRENGTH AND OTHER CHARACTERISTICS MAY DIFFER, DEPENDING ON THE CABLE STRUCTURE. PLEASE CONFIRM BEFORE THE USE.

5	POLYAMIDE	(BLACK) UL94V-0	10	CHLOROPRENE RUBBER	(BLACK)
4	BRASS	GOLD PLATING : $0.2\mu\text{m min.}$	9	BRASS	
3	BRASS	NICKEL UNDER PLATING : $2\mu\text{m min.}$	8	STEEL	NICKEL PLATING HEXAGON SOCKET SET SCREW M2.6×0.45×3
2	STAINLESS STEEL		7	BRASS	MATTE FINISH NICKEL PLATED
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	6	BRASS	MATTE FINISH NICKEL PLATED

NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD) CL		DRAWN T. Konatsu '06.10.10	DESIGNED S. Konatsu '06.10.10	CHECKED E. Kurui '06.10.10	APPROVED M. Sato '06.10.11	RELEASED
DRAWING NO. EDC4-020554-74		PART NO. HR10A-10J-12P(74)				
UNITS mm		CODE NO. CL110-0406-0-74				1/1

TO
R

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[HR10A-10J-12P\(74\)](#)