


Sep.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

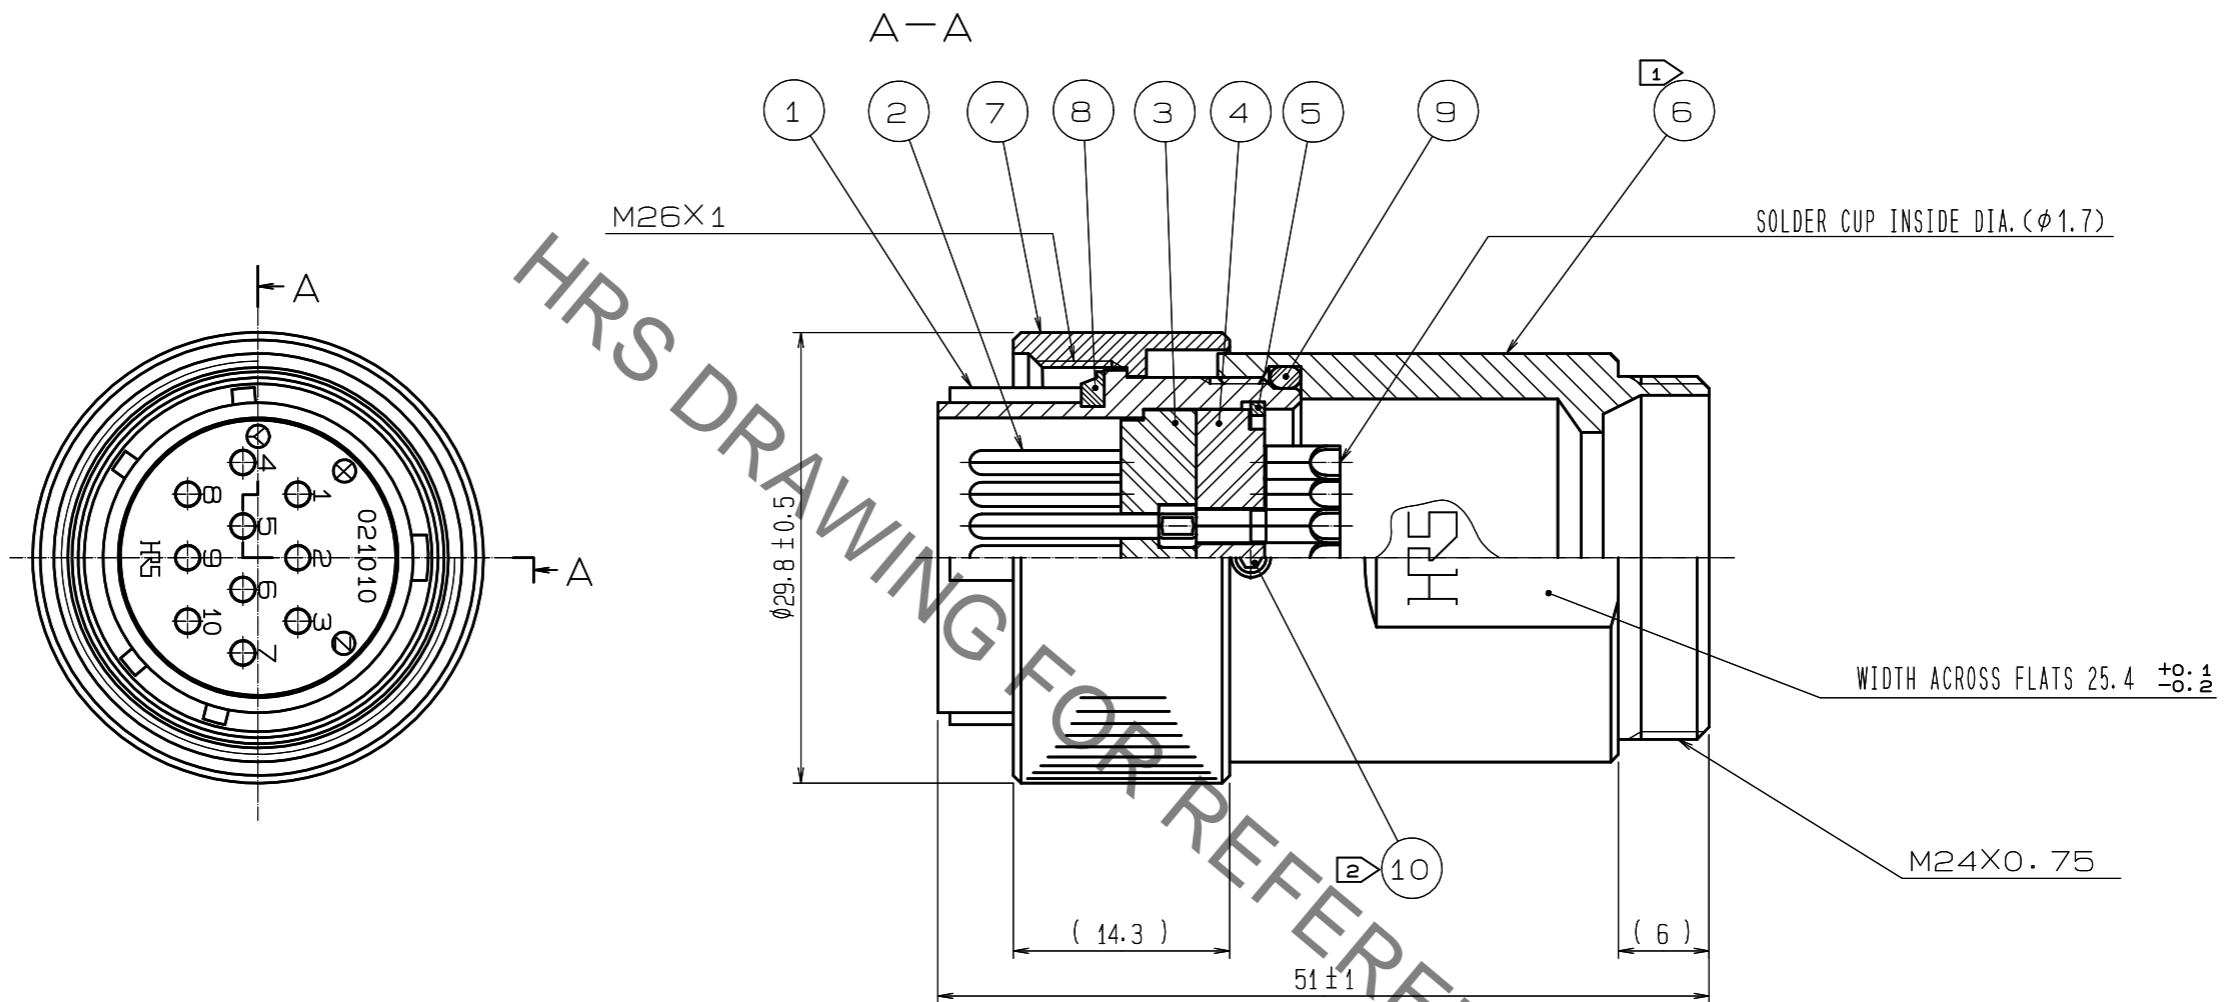

- NOTES
- ① THE RECOMMENDED CLAMP TORQUE OF REF. NO. ⑥ TO BE 4 TO 4.5 N·m.
 - ② THE RECOMMENDED CLAMP TORQUE OF REF. NO. ⑩ TO BE 0.2 TO 0.25 N·m.
 - ③ ROTATION EXAMPLES OF REF. NOS. ① AND ⑥ ARE SHOWN.
 - ④ SCREW OF REF. NO. ①, ⑥, ⑩, LOCTITE 263 OR EQUIVALENT, HENKEL JAPAN IS RECOMMENDED TO PREVENT FROM LOOSENING.
 - ⑤ THIS PRODUCT TO BE USED WITH CABLECLAMP, JR21WCC-*.
* DESIGNATE DIAMETER OF APPLICABLE CABLE.

NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
5	PHOSPHOR BRONZE	NICKEL PLATING	10	STAINLESS STEEL	
4	PHENOL-FORMALDEHYDE	(BLACK) UL94V-0	9	NBR	(BLACK)
3	PHENOL-FORMALDEHYDE	(BLACK) UL94V-0	8	NBR	(BLACK)
2	COPPER ALLOY	SILVER PLATING 3μm min.	7	BRASS	BLACK CHROME PLATING
1	ALUMINUM ALLOY	BLACK CHROME PLATING	6	BRASS	BLACK CHROME PLATING

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	△				
			APPROVED : HY. KOBAYASHI	18.02.26	DRAWING NO. EDC-110481-31-00	
			CHECKED : HY. KOBAYASHI	18.02.26	PART NO. JR21WP-10P(31)	
			DESIGNED : TH. KAMEYA	18.02.22	CODE NO. CL114-2005-6-31	
			DRAWN : MK. INOUE	18.02.13	1/1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[JR21WP-10P\(31\)](#)