




Sep.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

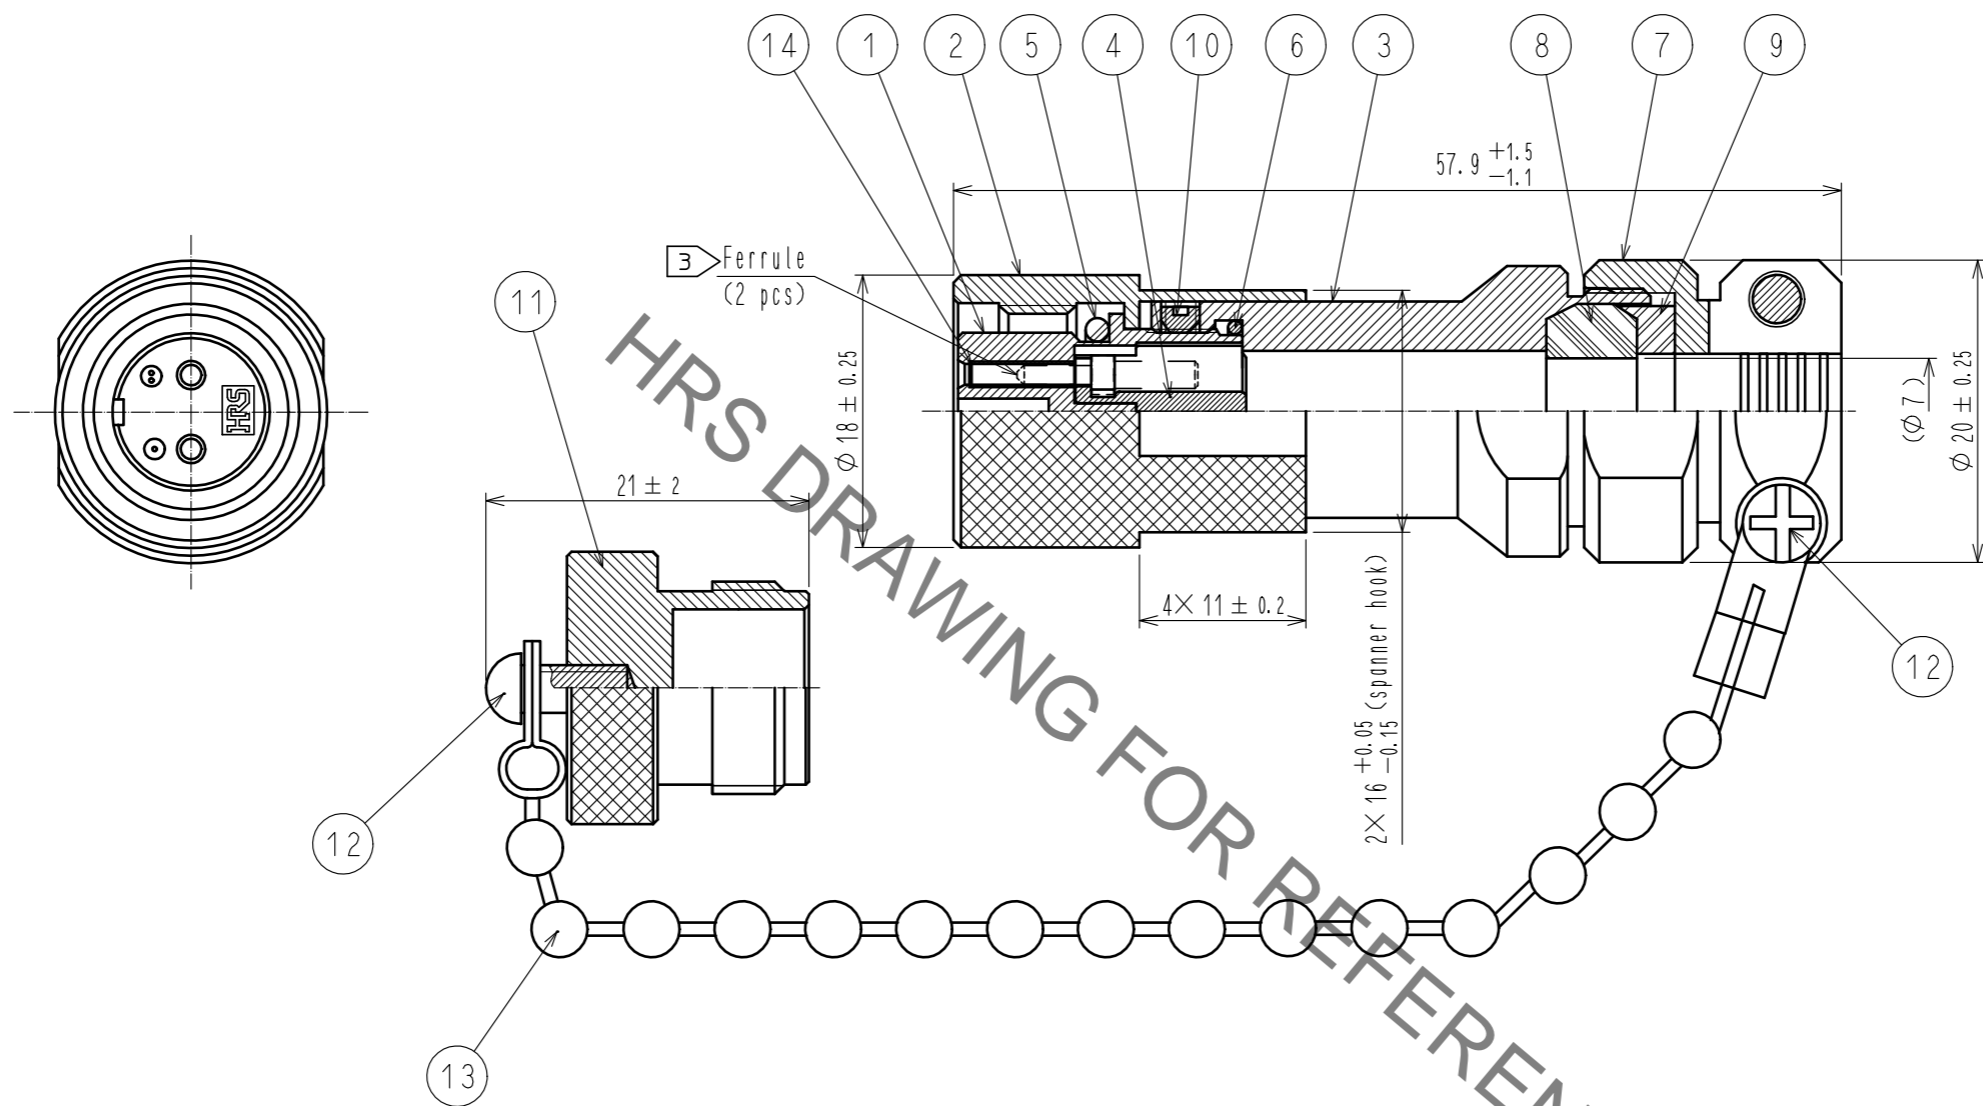

- NOTE 1. The procedure of cable assemblies would be confirm.
 2. When this plug is mated with a MF10S receptacle, the clamp torque of the part No. ② should be 1.5 to 3 N·m. Following MF10-T1 can be used as simple substitution of a torque wrench.

EXCLUSIVE PLASTIC SPANNER	PART NO.	CODE NO.
	MF10-T1	CL709-0205-8

③ The ferrule parts are not contained. Please use the 'standard MU ferrule' chosen from the outer diameter of the optical fiber.

7	BRASS	NICKEL PLATING	14	ZIRCONIA				
6	NBR RUBBER	COLOR:BLACK	13	STAINLESS STEEL				
5	NBR RUBBER	COLOR:BLACK	12	STAINLESS STEEL	NYELOCK			
4	ZINC DIECAST	NICKEL PLATING	11	ALUMINIUM ALLOY	ANODIC OXIDE COATING			
3	BRASS	NICKEL PLATING	10	STAINLESS STEEL				
2	BRASS	NICKEL PLATING	9	PPS RESIN	COLOR:BLACK			
1	ZINC DIECAST	NICKEL PLATING	8	NBR RUBBER	COLOR:BLACK			
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS			
UNITS mm			SCALE 2 : 1	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : MT. SHIBUTANI	18.02.02	DRAWING NO. EDC-178954-31-00				
		CHECKED : FS. YOSHIDA	18.02.02	PART NO. MF10S-WPN7C50-0200(31)				
		DESIGNED : TY. SATO	18.02.02	CODE NO. CL709-0214-9-31				
		DRAWN : MK. INOUE	18.02.01					

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[MF10S-WPN7C50-0200\(31\)](#)