

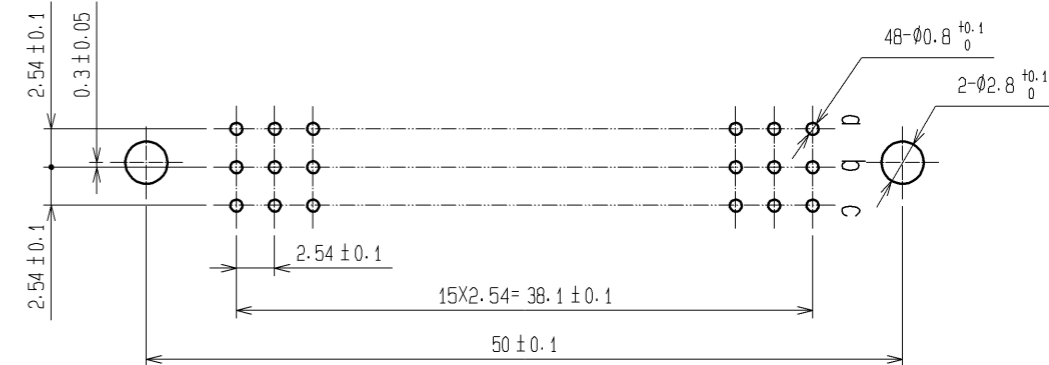
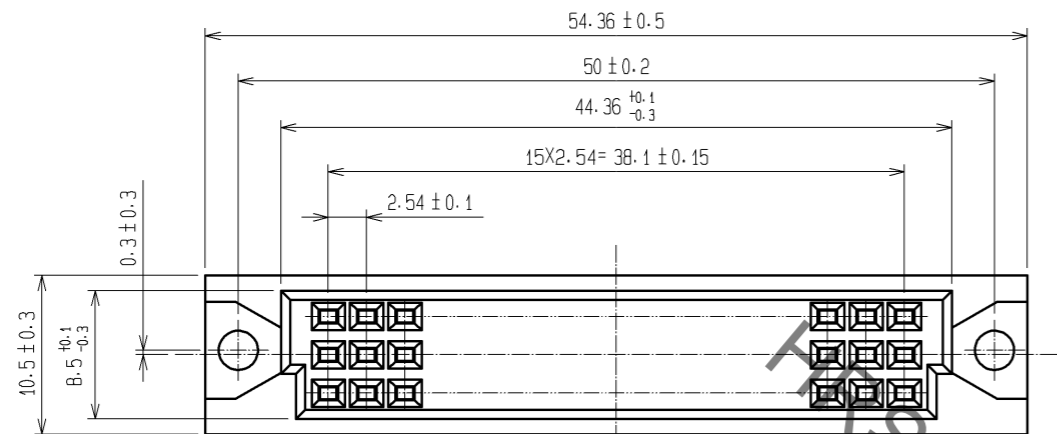
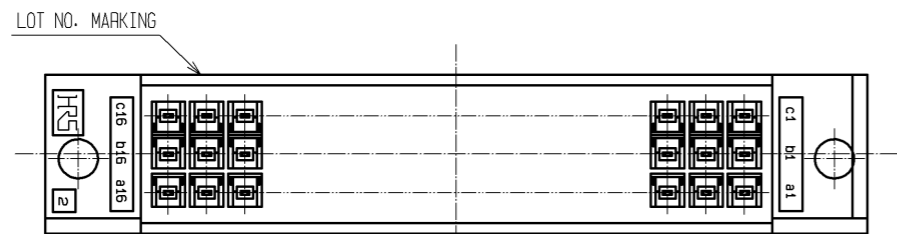


Sep.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

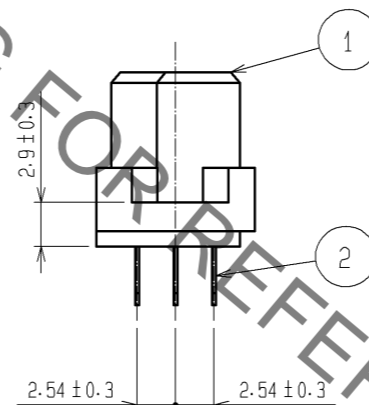

RECOMMENDED P.C.B. HOLE PATTERN (t=1.6 ± 0.1)

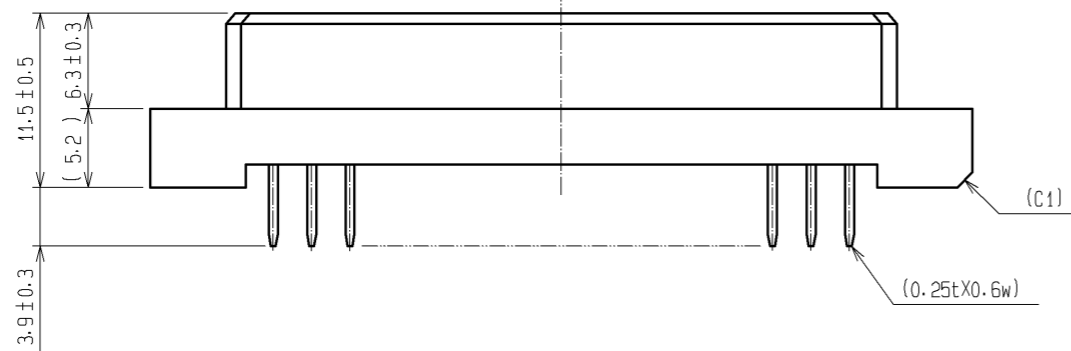

1	PBT	BEIGE	UL94V-0	2,3	COPPER ALLOY	CONTACT AREA: Ni1µm+Au0.1µm		
						DIP AREA: Ni1µm+Sn2µm		
NO.	MATERIAL	FINISH.	REMARKS	NO.	MATERIAL	FINISH.	REMARKS	
UNITS	mm	SCALE	2:1	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HRS		HIROSE ELECTRIC CO., LTD.		APPROVED: KI. AKIYAMA	08.02.20	DRAWING NO. EDC3-020601-01		
				CHECKED: SI. TOMIOKA	08.02.19	PART NO. PCN13-48S-2.54DSA(71)		
				DESIGNED: NH. SUGITA	08.02.19	CODE NO. CL583-3010-9-71		
				DRAWN: NN. ONDA	08.02.19	1/1		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[PCN13-48S-2.54DSA\(71\)](#)