


Aug.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

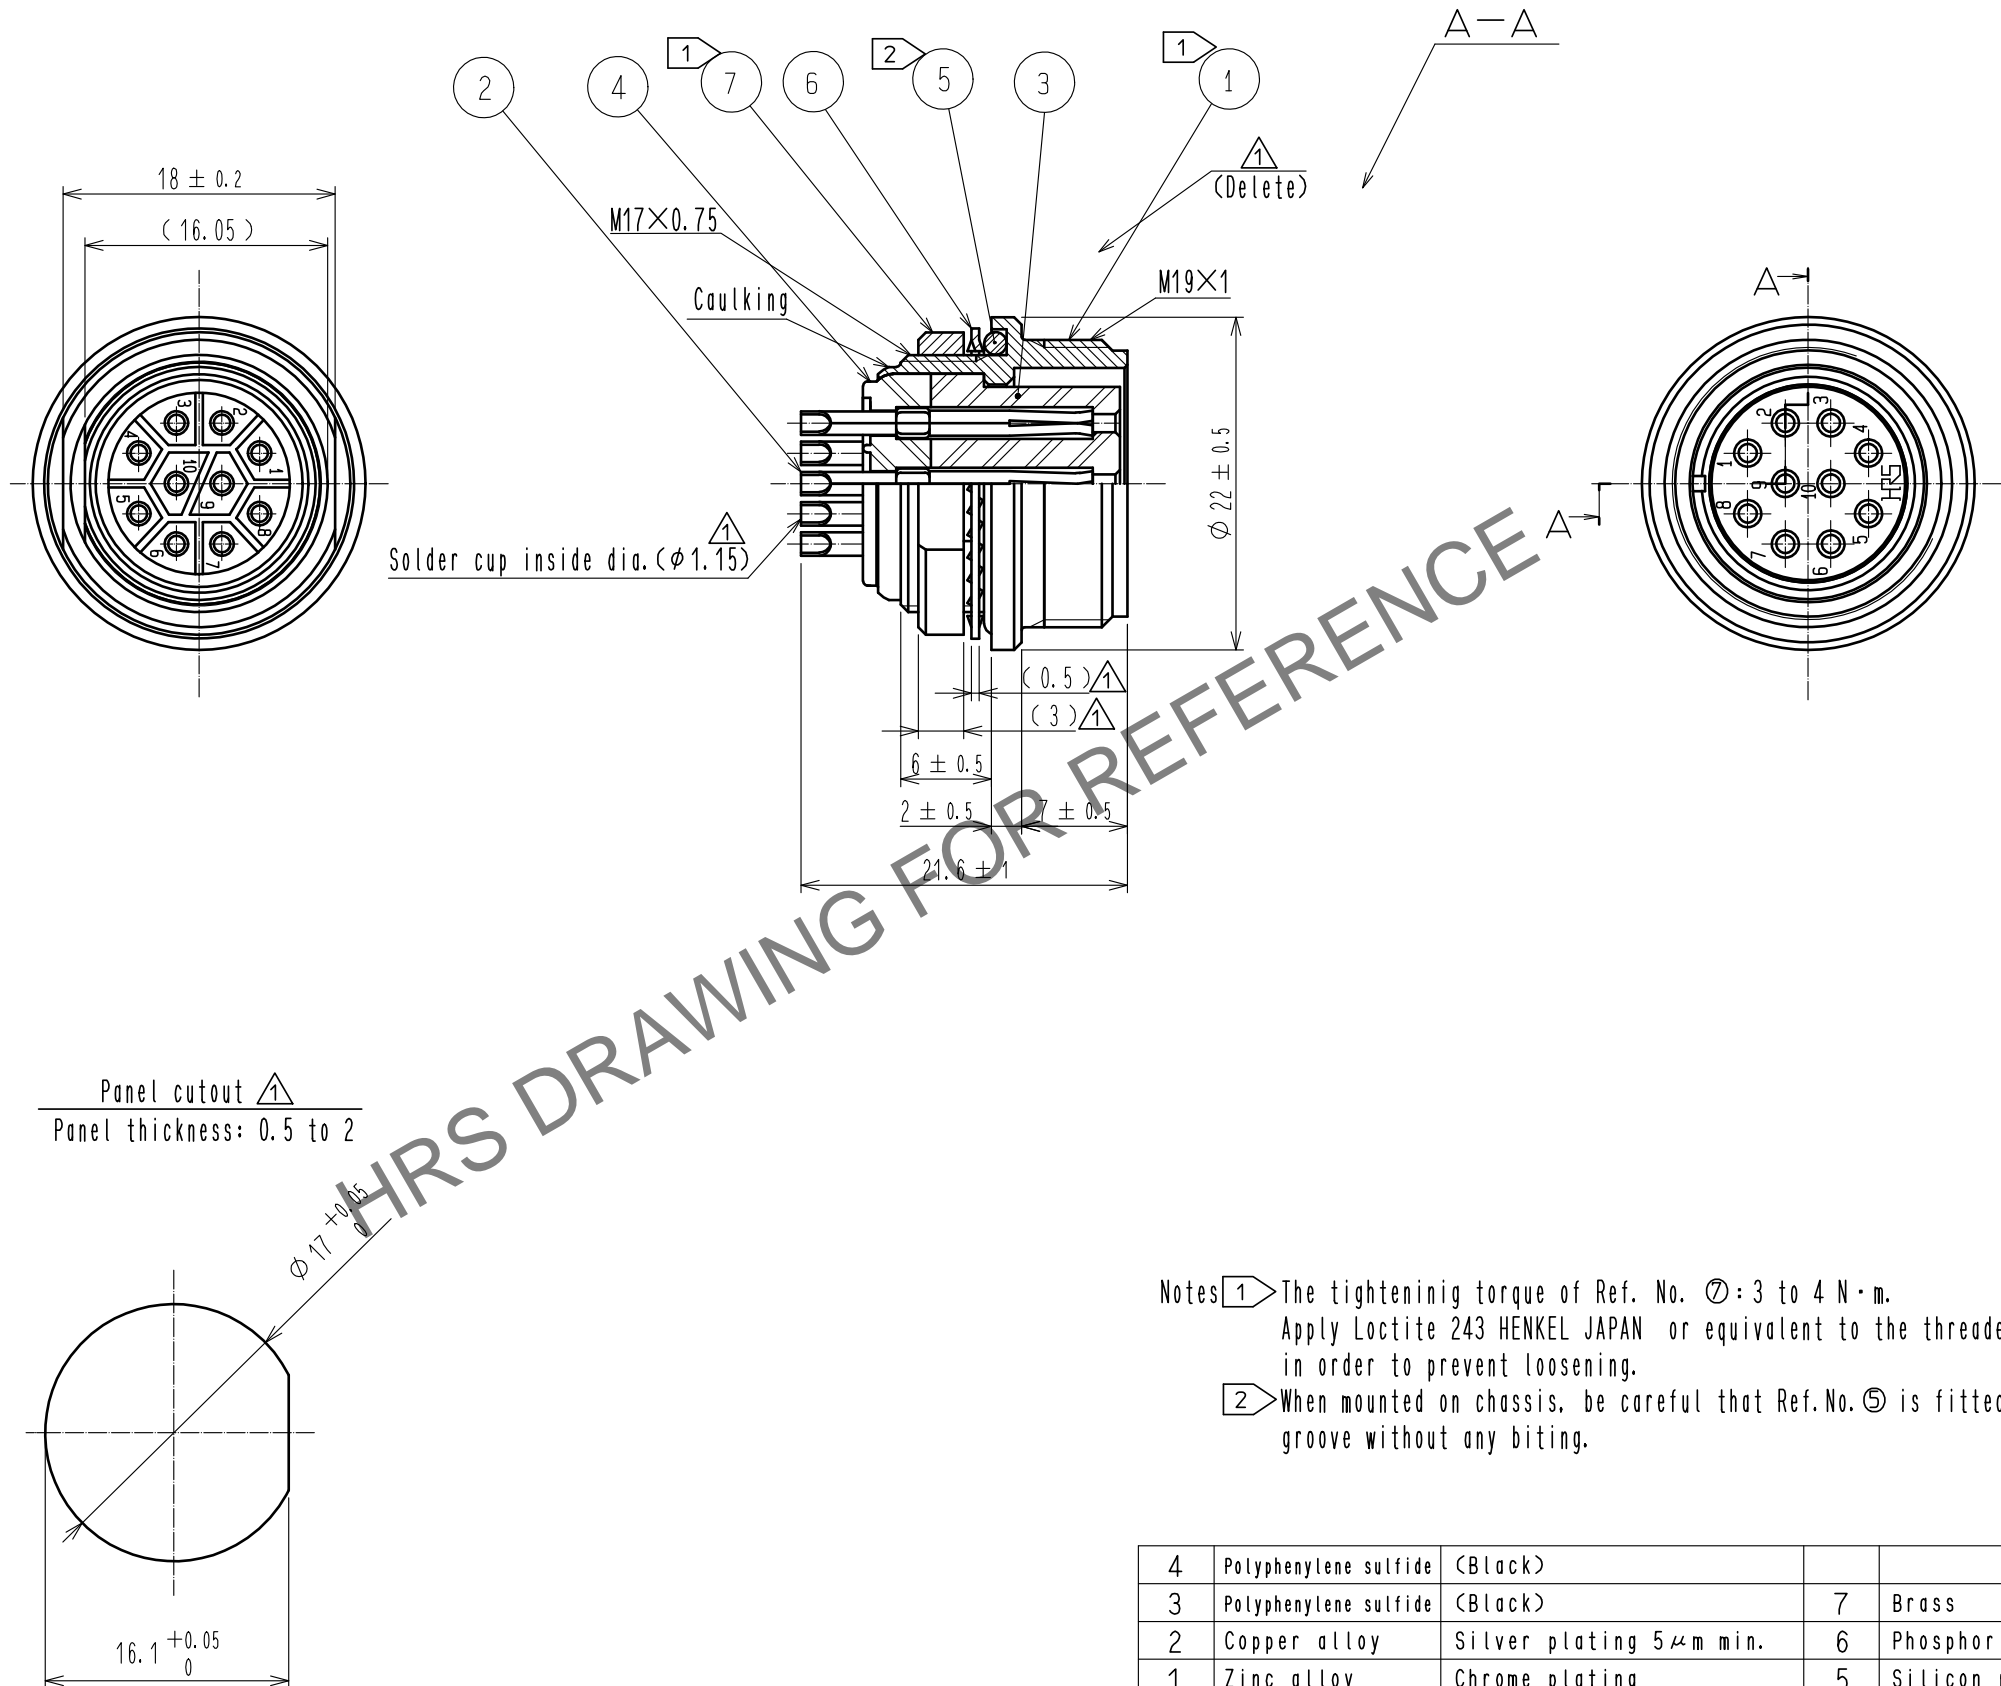

Notes ① The tightening torque of Ref. No. ⑦: 3 to 4 N·m.
Apply Loctite 243 HENKEL JAPAN or equivalent to the threaded portion (M17×0.75) of Ref. No. ① in order to prevent loosening.
② When mounted on chassis, be careful that Ref.No. ⑤ is fitted into the indicated groove without any biting.

4	Polyphenylene sulfide	(Black)			
3	Polyphenylene sulfide	(Black)	7	Brass	Nickel plating
2	Copper alloy	Silver plating 5μm min.	6	Phosphor bronze	Nickel plating
1	Zinc alloy	Chrome plating	5	Silicon rubber	(Black)
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT 5	DESCRIPTION OF REVISIONS DIS-C-00015646	DESIGNED HT. ZENBA
		APPROVED : TP. KOMATSU	20230131	DRAWING NO.	EDC-111081-81-00
		CHECKED : HY. KOBAYASHI	20230131	PART NO.	RM15WTRZ-10S(81)
		DESIGNED : HT. ZENBA	20230131	CODE NO.	CL0109-1641-6-81
		DRAWN : KR. SUZUKI	20230131		
				DATE	20230626

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[GT25-24DP-2.2V\(56\)](#)