
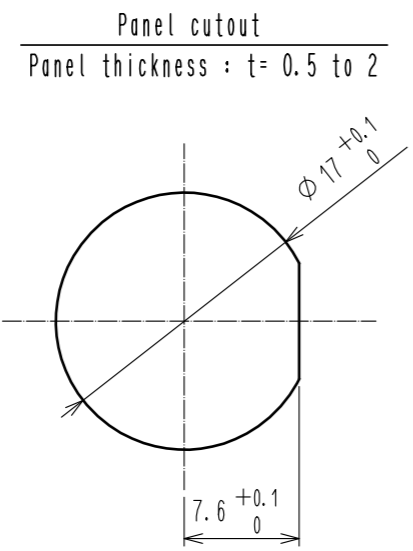


Sep.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

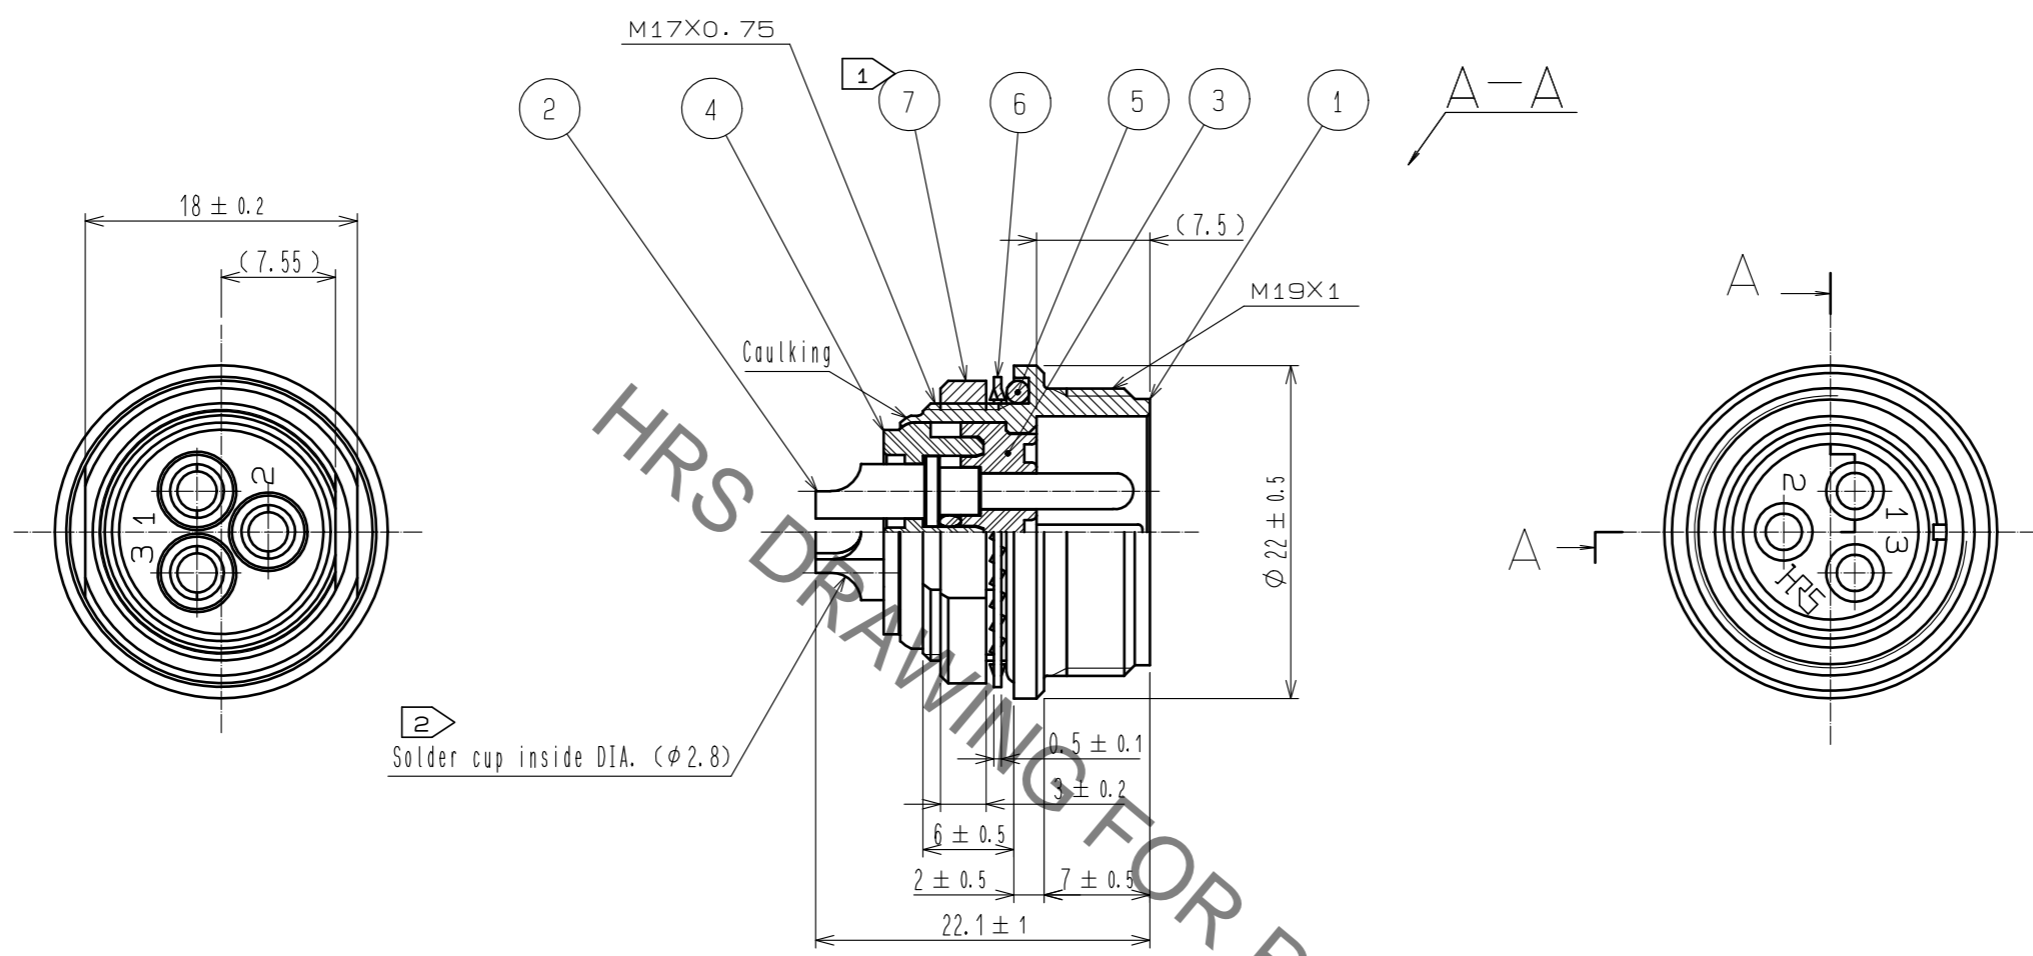

- Notes
- ① The recommended tightening torque of REF. No. ⑦ : 3 N·m.
LOCTITE 243, HENKEL JAPAN or equivalent is recommended to prevent REF. No. ⑦ from loosening.
 - ② The direction of solder cup REF. No. ② is an example.
 - ③ Plating.
Surface : Gold 0.2μm min.
Under : Nickel 3μm min.

4	Diallyl phthalate	(Black) UL94V-0						
3	Diallyl phthalate	(Black) UL94V-0	7	Brass	Nickel plating			
2	Brass	③	6	Phosphor bronze	Nickel plating			
1	Zinc alloy	Chrome plating	5	Silicone rubber	Black			
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS			
UNITS	mm	SCALE	2 : 1	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HRS HIROSE ELECTRIC CO., LTD.		APPROVED	: HY. KOBAYASHI	16.03.25	DRAWING NO.	EDC-110768-72-00		
		CHECKED	: HY. KOBAYASHI	16.03.25	PART NO.	RM15WTRZ-3P(72)		
		DESIGNED	: TH. KAMEYA	16.03.25	CODE NO.	CL109-1632-5-72		
		DRAWN	: TH. KAMEYA	16.03.25		①/1		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[RM15WTRZ-3P\(72\)](#)