


Aug.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

TO
Q2
USA

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
2	DIS-E-003409	K.N	Y.E	70.9.13					

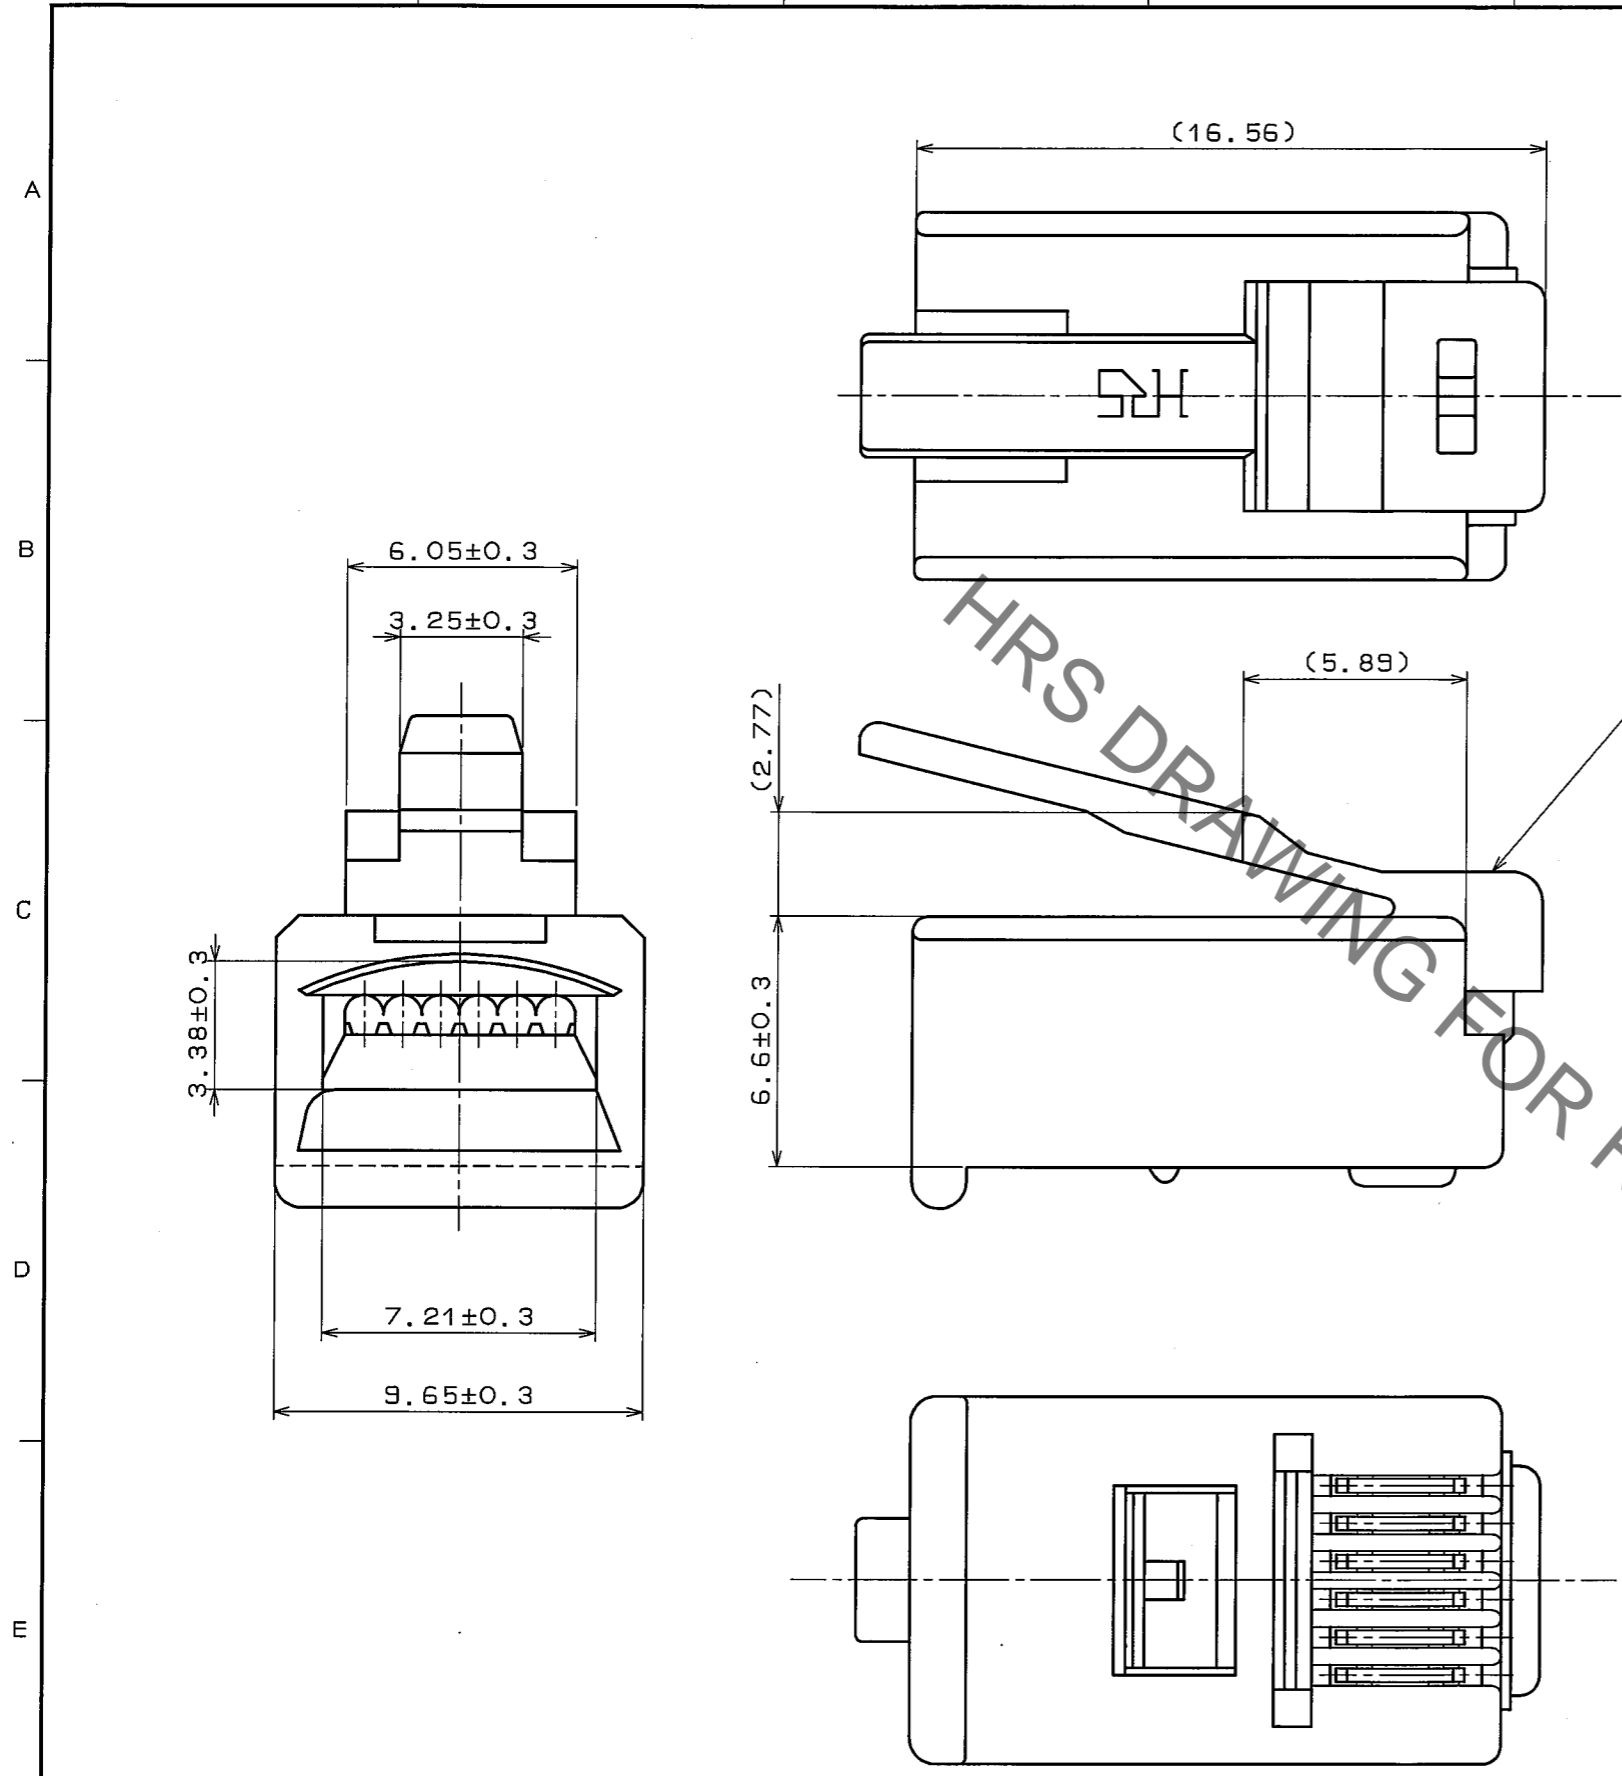


NOTES

- 1 THE DIMENSIONS IN PARENTHESIS ARE FOR REFERENCE.
- 2 THIS PLUG, 6 CONDUCTORS IS FOR STRANDED WIRE, THIN CABLE.

APPLIABLE CABLE DIMENSIONS ARE AS FOLLOWS			
CONDUCTOR	CONSTRUCTION FOR REFERENCE	INSULATOR DIAMETER	$\phi 0.7 \sim \phi 0.79$ (AWG#28 7/0.127 STRANDED WIRE)
		JACKET DIAMETER	(4.5)

- 3 SPECIFIED HAND TOOL (TC1-TM 30P-66P) SHALL BE USED FOR WIRING.
- 4 CONTACT HEIGHT AFTER WIRING SHALL BE 5.89 TO 6.15 mm.

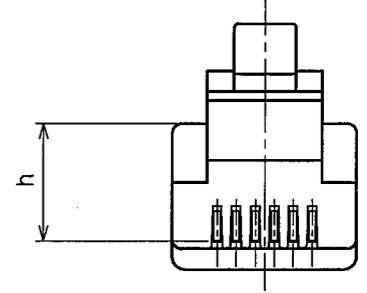

1	POLYCARBONATE (BLUE CLEAR) UL94V-0	2	PHOSPHOR BRONZE	GOLD PLATING
NO.	MATERIAL	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD)		DRAWN	DESIGNED	CHECKED
		Y. Dhata	Y. Dhata	J. Asa
		98.5.20	98.5.20	98.5.20
		APPROVED	RELEASED	
		H. Morita		
DRAWING NO. EDC3-049045		PART NO. TM30P-66P		
SCALE 5 : 1		CODE NO. CL222-2684-2		
UNITS mm		1/1		



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[TM30P-66P](#)