

**MICRO SWITCH**

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY  
FREDERICK, MARYLAND

FED. MFR. CODE 91929

# SWITCH - BASIC

CATALOG LISTING  
**YA-2RB-A2**

ADJ6000

CATALOG LISTING

YA-2RB-A2

PAGE 1 OF 1

REPLACES

RELEASE NO.

CHECK

17 FEB 06

RJ

CHECK

27 AUG 98

CO-95750-B

3 APR 00

0000713

JAH

30 JUN 03


0018388

TGP

17 FEB 06

REVISIONS

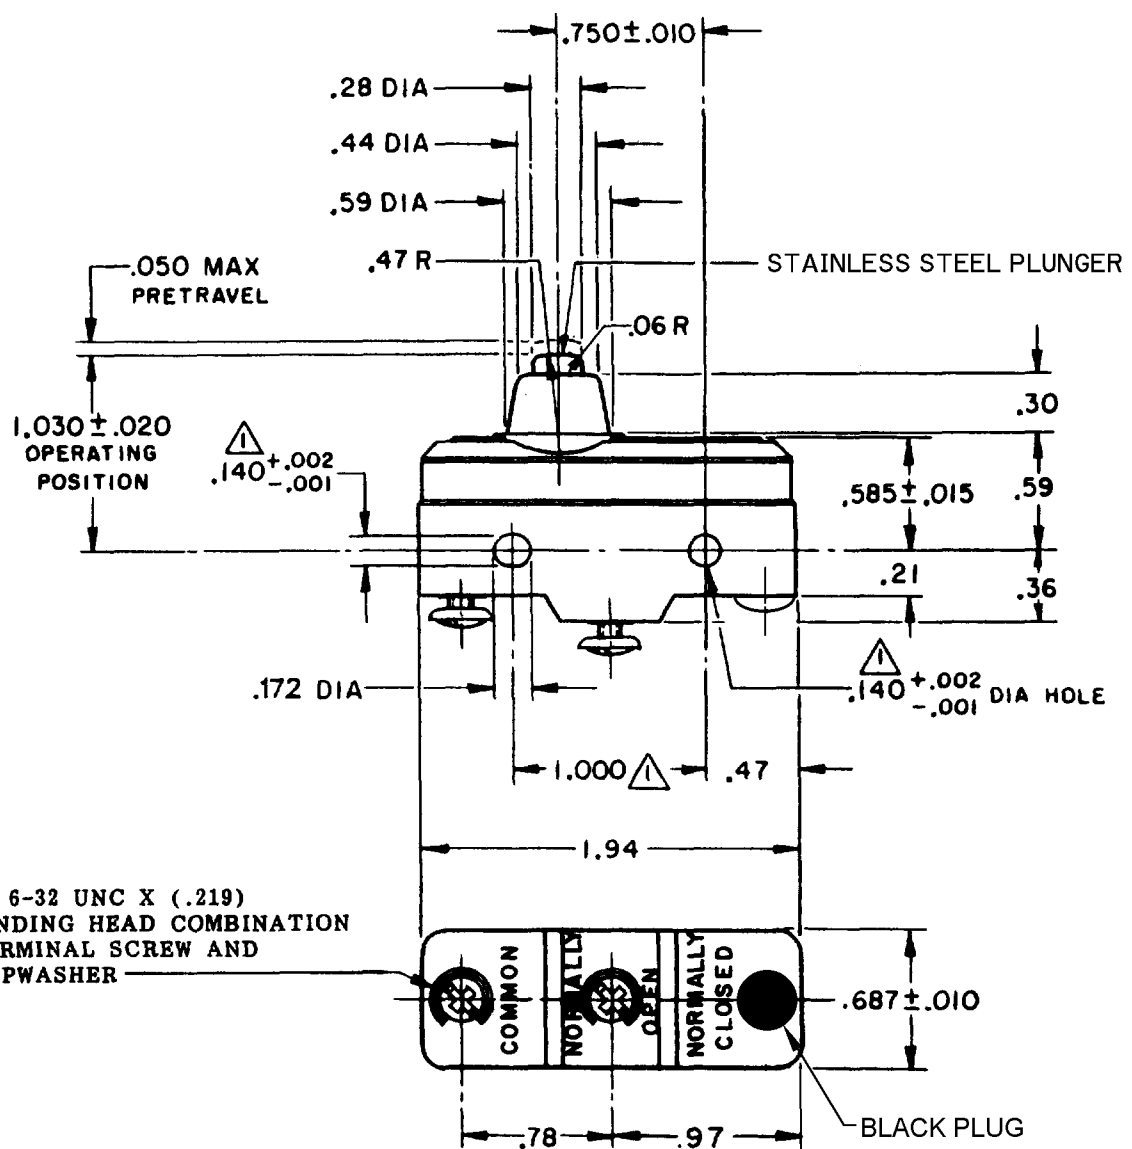


|    |            |           |
|----|------------|-----------|
| A  | CO 9600    | 17 FEB 06 |
| 1  | Y O        |           |
| 2  | MAY 60     |           |
| B  | CO34310    |           |
| K  | P          |           |
| 20 | DEC 78     |           |
| C  | CO-73287-J |           |
| J  | A L        |           |
| 22 | NOV 93     |           |
| D  | CO-77588   |           |
| K  | D R        |           |
| 29 | MAR 94     |           |
| E  | CO93346    |           |
| D  | L T        |           |
| 27 | AUG 98     |           |
| F  | CO-95750-B |           |
| C  | S L        |           |
| 3  | APR 00     |           |
| H  | 0000713    |           |
| J  | 0018388    |           |
| T  | G P        |           |
| 17 | FEB 06     |           |



3X 6-32 UNC X (.219)  
BINDING HEAD COMBINATION  
TERMINAL SCREW AND  
CUPWASHER

**NOTE**  
MOUNTING HOLES WILL ACCEPT PINS OR SCREWS  
OF  $.139$  MAX DIA ON  $1.000 \pm .002$  CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

| CHARACTERISTICS                   |  | ELECTRICAL DATA  |  | SCALE FULL  |                |
|-----------------------------------|--|--|--|---|----------------|
| OPERATING FORCE -----14-22 OZ     |  | CONTACT ARRANGEMENT<br>S P N O   |  | DO NOT SCALE PRINT  |                |
| RELEASE FORCE ----- 10 OZ MIN     |  | L23<br>20A - 125, 250 OR 480 VAC<br>10A - 125 VAC "L"<br>1HP - 125 VAC, 2HP - 250 VAC<br>1/2A - 125 VDC, 1/4A - 250 VDC<br><br>L288<br>L308<br>L315<br><br>20(3)A 250V ~ T85 5E4 |  | UNLESS OTHERWISE SPECIFIED<br>DIMENSIONS ARE IN INCHES<br><b>TOLERANCES ARE:</b><br>ONE PLACE (.0) ±.030<br>TWO PLACE (.00) ±.015<br>THREE PLACE (.000) ±.005<br>ANGLES ±   |                |
| DIFFERENTIAL TRAVEL -- .002-.0075 |  |  |  | CE    | WEIGHT .064 LB |
| OVERTRAVEL ----- .094 MIN         |  |  |  |   |                |



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[YA-2RB-A2](#)